

Item #: 178A19RHC Project: \_\_\_\_\_

Qty: \_\_\_\_\_ Date: \_\_\_\_\_ Approval: \_\_\_\_\_

## Avantco A-19R-HC 29" Solid Door Reach-In Refrigerator

Item #178A19RHC



### Technical Data

|                          |                |
|--------------------------|----------------|
| Width                    | 29 Inches      |
| Depth                    | 25 1/2 Inches  |
| Height                   | 82 1/2 Inches  |
| Power Cord Length        | 96 Inches      |
| Interior Width           | 24 3/8 Inches  |
| Right Door Opening Width | 24 5/16 Inches |
| Shelf Width              | 23 3/8 Inches  |
| Interior Depth           | 20 3/8 Inches  |
| Shelf Depth              | 19 5/16 Inches |
| Interior Height          | 53 1/2 Inches  |

### Features

- Corrosion-resistant stainless steel exterior and aluminum interior with 304 stainless steel floor
- Features a self-closing and stay-open locking door
- Includes 3 epoxy coated shelves with 88 lb. capacity each
- Digital temperature controller with automatic defrost function
- R-290 refrigerant; 115V; 1/3 hp

### Certifications



ETL, US



5-15P




ETL Sanitation

## Technical Data

|                      |                                 |
|----------------------|---------------------------------|
| Amps                 | 3.1 Amps                        |
| Hertz                | 60 Hz                           |
| Phase                | 1 Phase                         |
| Voltage              | 115 Volts                       |
| Wattage              | 300 Watts                       |
| Access Type          | Doors                           |
| BTU (LBP)            | 850 BTU                         |
| Capacity             | 17.3 cu. ft.                    |
| Capacity (per Shelf) | 88 lb.                          |
| Casters              | With Casters                    |
| Color                | Silver                          |
| Compressor Location  | Bottom Mounted                  |
| Construction         | Stainless Steel and Aluminum    |
| Door Style           | Swing                           |
| Door Type            | Solid                           |
| Dutch Half Doors     | Without Dutch Half Doors        |
| Features             | Removable Magnetic Door Gaskets |
| Handle Material      | Plastic                         |
| Hinge Location       | Right                           |
| Horsepower           | 1/3 hp                          |
| Installation Type    | Freestanding                    |
| Number of Doors      | 1 Doors                         |
| Number of Shelves    | 3 Shelves                       |
| Plug Type            | NEMA 5-15P                      |
| Refrigerant Capacity | 2.6 oz.                         |
| Refrigerant Type     | R-290                           |
| Sections             | 1 Section                       |
| Starting Amps        | 9.3 Amps                        |
| Starting Wattage     | 900 Watts                       |
| Temperature Range    | 33 - 40 Degrees F               |
| Type                 | Refrigerators                   |

## Plan View

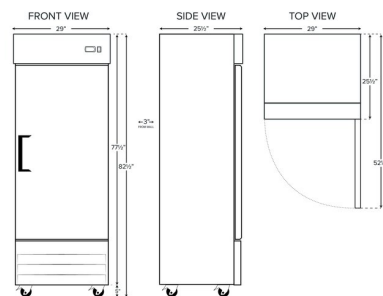



## Notes & Details

Your establishment relies on refrigeration for proper food safety, and with this Avantco A-19R-HC 29" solid door refrigerator, you receive performance you can depend on! A painted aluminum interior with a 304 stainless steel floor gives you increased durability, while a 430 stainless steel door and exterior sides give it a sleek appearance. For convenience, 3 epoxy coated shelves feature shelf clips for customization when desired.

Designed to maintain temperatures from 33-40 degrees Fahrenheit, this refrigerator boasts a bottom-mounted 1/3 hp compressor that Uses R-290 refrigerant. This specialized refrigerant has an ozone depletion potential (ODP) of 0 and a global warming potential (GWP) of 3. In addition, the bottom-mounted design makes it easy for employees to load and unload products due to the raised bottom shelf. For optimal temperature retention, the entire cabinet is foamed-in place using polyurethane insulation. Other helpful features include the stay open locking door mechanism, automatic defrosting, and a digital temperature control with digital display. This item requires a 115V electrical connection for operation.

**⚠ WARNING:** This product can expose you to chemicals including lead, which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.p65warnings.ca.gov](http://www.p65warnings.ca.gov).