

Pesaro Maxi Adjustable

TRACKLIGHT

Product code ML32TA

mondolux.com.au

MONDOLUX™

Installation Manual





Notes

- This fitting requires 220-240V AC/50Hz power input to the driver. Installation should be done by qualified electrician.
- Electrical Wiring and installation should always comply as per the local standards.
- Do not open or interchange any parts of this fitting or the warranty is void.
- The fitting may be hot to touch after continuous use.
- Do not install the fitting near heat source.
- Do not install any inductive loads such as exhaust fans or pond pumps etc. within the same lighting circuit of this fitting. Issues caused by such wirings are not covered under our warranty policy.
- If you have any questions about the installation of this product, please contact Mondolux at 1300 601 931.


Care & Refinishing

Mondolux strongly recommends following cleaning procedures to maintain proper finish of the product.

- Do not use bleach or concentrated solvents under any circumstances.
- For Black finish: Wipe gently with a soft damp cloth or chamois. Do not use any abrasive compounds.

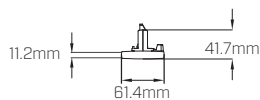

Linear

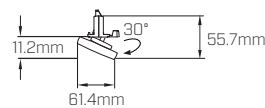

Tilt Angle

Pesaro Maxi Adjustable

TRACKLIGHT

Product code


ML32TA

mondolux.com.au

MONDOLUX™

Installation Steps

1. Ensure the mains power is turned off.
2. Make sure the luminaire is set to desired power and phase settings. See Pictures 1, 2.
3. Click-in the track adaptor into the track and secure it by locking the knobs. The luminaire is compatible with most of the standard Tracks including the Mondolux brand. See Pictures 3, 4.
4. The Luminaire can be then tilted to desired angle up to 30° on each side. To tilt, secure the luminaire on to the track and gently pull it downwards. Now tilt forward or backward based on the requirement. See technical drawing on Page 1.
5. Driver can be adjusted to 4 different positions. Fixing lock can be adjusted in 2 positions. Make sure the driver and fixing locks are adjusted accordingly while connecting to the continuous track system, to avoid installation on the track joints. See Picture 5 through 10.
6. Installation is complete.




L1 L1 as a phase

L3 L3 as a phase

L2 L2 as a phase


N Neutral Conductor

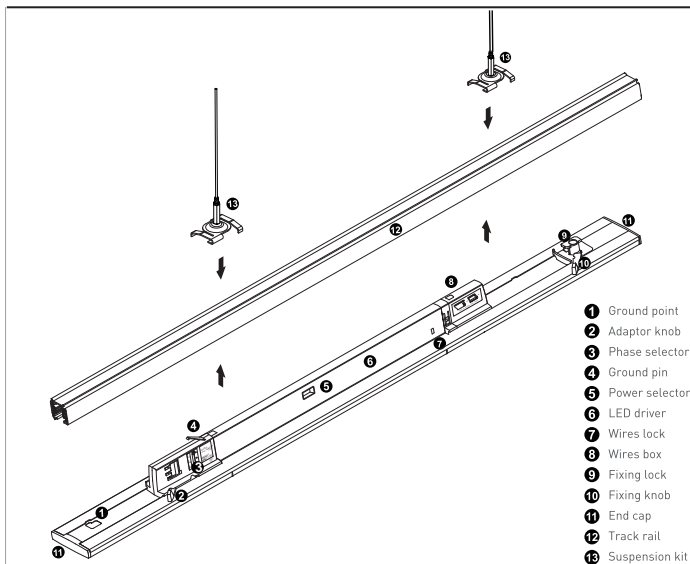


Picture 1




Picture 2




Picture 3

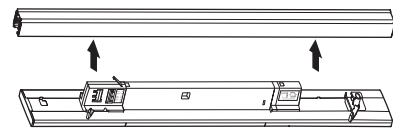


Picture 4

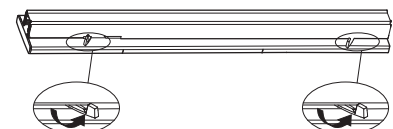


Picture 5 Make sure the track joints are avoided while installation. To ensure that, adjust the LED driver or fixing lock positions.




Picture 6 If the fixing lock position is interfered, slide it to right or left to avoid track joint.




Picture 7 If the LED driver is interfered, expose the wires from wire box by moving it to right.

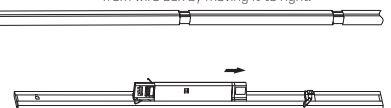

Picture 8 Now slide the driver to right or left to avoid the track joint.

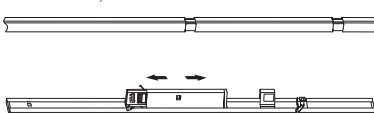

Picture 9 Now slide the wire box close to newly adjusted driver position and put the exposed wires back into wire box.

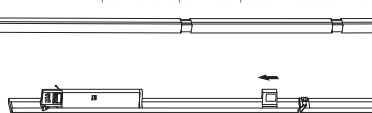

Picture 10 Install the luminaire by successfully avoiding the track joints.

