



## Keyboard Folio "S"

for Samsung Galaxy Note® 10.1 and Galaxy Tab™ 2 10.1




Setup Guide

## Contents

English. . . . .	3
繁體中文 . . . . .	11
한국어 . . . . .	19

## Know your product

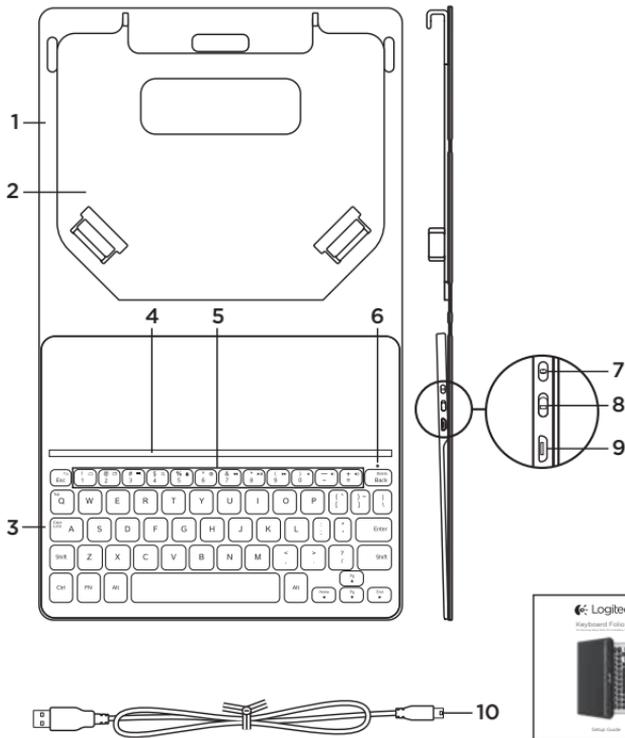


1. Protective folio
2. Tablet holder
3. Keyboard
4. Slot
5. Function keys
6. Bluetooth and battery status light
7. Bluetooth connect button
8. On/off switch
9. Micro-USB charging port
10. Micro-USB charging cable
11. Product documentation


## Setting up the keyboard folio

### Inserting your tablet into the tablet holder

1. Open the keyboard folio, and slide the top of your tablet under the hooks on the tablet holder:

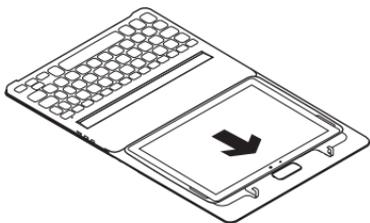

2. At the bottom of the tablet holder, use the two rubber bands to fix the tablet in place:

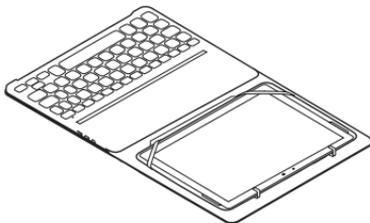


3. Move the tablet holder into the typing position (see "Using the keyboard folio").

### Establishing connection with your tablet

The keyboard folio links to your tablet via a Bluetooth connection. The first time you use the keyboard folio, you must pair it with your tablet:

1. Turn on the keyboard:

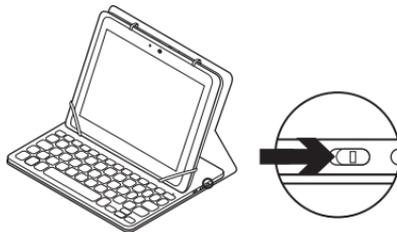

The status light blinks blue to indicate that the keyboard is discoverable, ready for pairing with your tablet. The first time you turn on the keyboard it remains discoverable for 15 minutes. If the status light turns red, charge the battery. For more information, see "Charging the keyboard battery."

**2. On your tablet:**


- Make sure your tablet's Bluetooth feature is on. Select Settings > Wireless & Networks > Bluetooth, and make sure it is set to On.
- Select "Keyboard Folio S" from the list of devices in range.

**3. On the keyboard, enter the PIN displayed on your tablet screen and press Enter.**

When successful connection is made, the status light turns solid blue for a short time, and then turns off.

**Connecting to another Tablet**

1. Turn on the keyboard.
2. Make sure your tablet's Bluetooth feature is on. Select Settings > Wireless & Networks > Bluetooth, and make sure it is set to On.
3. Press the Bluetooth Connect button on your keyboard:

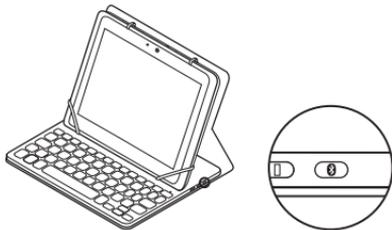

The keyboard remains discoverable for 3 minutes.

4. On the tablet, select "Keyboard Folio S" from the list of devices in range.
5. On the keyboard, enter the PIN displayed on your tablet screen and press Enter.


When successful connection is made, the status light turns solid blue for a short time, and then turns off.

## Using the keyboard folio

### Two viewing positions

The keyboard folio provides two viewing positions—one for typing and another for browsing.

To type, move the tablet holder into the typing position, by putting its base in the slot just above the keyboard which aligns the built-in magnets to secure it. Turn on the keyboard:



Typing position

If you don't use the keyboard for a while in the typing position, it enters sleep mode automatically. Pressing any key wakes it.

To browse, place the tablet holder in the browsing position. Turn off the keyboard to conserve battery power:



Browsing position

## Status light indicators

### Bluetooth and battery status light

Light	Description
Blinking green	The battery is charging.
Green	The battery is charged (more than 20%).
Red	Battery power is low (less than 20%). Recharge the battery.
Blinking blue	The keyboard is ready for pairing or is trying to reconnect to your tablet.
Solid blue	Bluetooth pairing or reconnection is successful.

## Function keys



**Fn + Esc: Back**



**Fn + 1: Android home**



**Fn + 2: Switch applications**



**Fn + 3: Android menu**



**Fn + 4: Search**

Launch the tablet search function



**Fn + 5: Screen lock**

Lock or unlock the tablet screen



**Fn + 6: Web browser**



**Fn + 7: Previous track**



**Fn + 8: Play/Pause**



**Fn + 9: Next track**



**Fn + 0: Mute**



**Fn + -: Volume down**



**Fn + =: Volume up**



**Fn + Backspace: Forward delete**



**Fn + Left cursor: Home**



**Fn + Right cursor: End**



**Fn + Up cursor: Page Up**




**Fn + Down cursor: Page Down**

### Note:

- To select a function key, press and hold the Fn key, and then press the key indicated above.

## Charging the keyboard battery

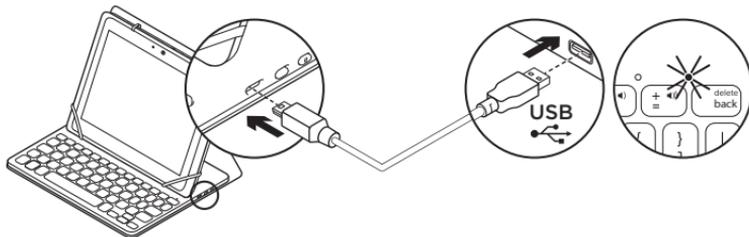

If the status light is red the keyboard folio battery needs to be charged.

1. Plug one end of the micro-USB cable into the charging port, and the other end into a USB port on your computer.

The status light blinks green as the battery charges.


**Note:** Please note the power input max is 5V, 500mA, if you use an alternative charging solution.

2. Charge the battery until the status light turns solid green.

### Battery information

- A fully charged battery provides about three months of use when the keyboard is used about two hours a day.
- Charge the battery if the status light turns red briefly after the keyboard turns on.
- When not in use, turn off the keyboard to conserve battery power.
- The keyboard enters sleep mode automatically if not used for a while in the typing position. Press any key to wake it.

## Battery disposal at product end of life

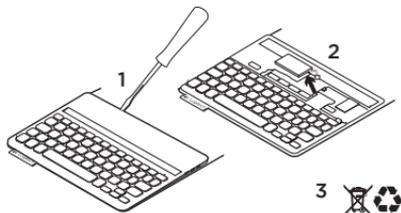

1. Pry off top cover of keyboard with screwdriver.
2. Detach battery from circuit board and remove battery.
3. Dispose of your product and its battery according to local laws

## Visit Product Central

There's more information and support online for your product. Take a moment to visit Product Central to learn more about your new keyboard folio.

[www.logitech.com/keyboardfolios](http://www.logitech.com/keyboardfolios)

Browse online articles for setup help, usage tips, and information about additional features.

Connect with other users in our Community Forums to get advice, ask questions, and share solutions.

Find a wide selection of content including:


- Tutorials
- Troubleshooting
- Support community
- Online documentation
- Warranty information
- Spare parts (when available)

## Troubleshooting

### **The keyboard does not work**

- Press any key to wake the keyboard from sleep mode.
- Turn the keyboard off and then back on.
- Recharge the internal battery. For more information, see “Charging the keyboard battery.”
- Re-establish the Bluetooth connection between the keyboard and your tablet.
- Verify that Bluetooth is turned on in your tablet’s settings (Settings > Wireless & Networks > Bluetooth > On).
- Choose “Keyboard Folio S” from the Devices menu on your tablet. The status light turns solid blue when Bluetooth connection is established.


## 認識產品

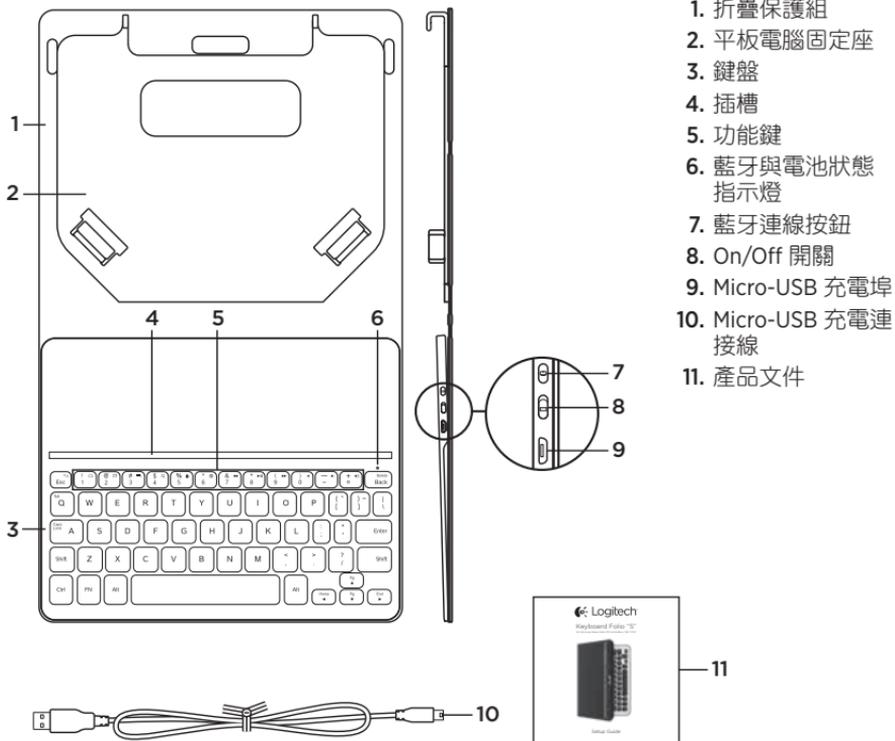


## 設定鍵盤折疊保護組

將平板電腦插入到平板電腦固定座中

1. 打開鍵盤折疊保護組，將平板電腦頂端滑動到平板電腦固定座的鉤鎖下方：

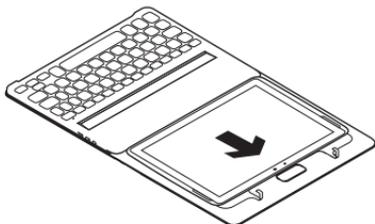

2. 在平板電腦固定座下方，使用兩條橡皮筋將平板電腦固定到位：

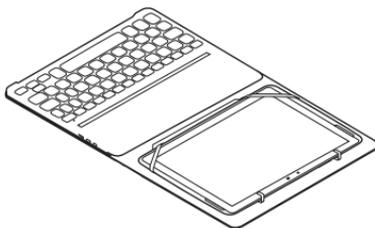


3. 將平板電腦固定座移入打字位置 (請參閱「使用鍵盤折疊保護組」)。

與平板電腦建立連線

鍵盤折疊保護組透過藍牙連線連結到平板電腦。第一次使用鍵盤折疊保護組時，必須將其與您的平板電腦進行配對：

1. 開啟鍵盤電源：

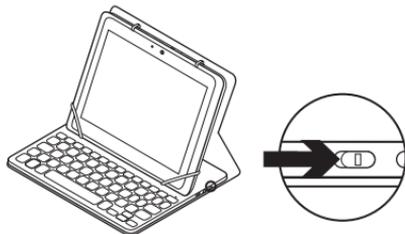

狀態指示燈閃爍藍燈，表示鍵盤處於可偵測狀態，可以和平板電腦進行配對。第一次開啟鍵盤電源時，它會保持在可偵測狀態 15 分鐘。

如果狀態指示燈亮起紅燈，請為電池充電。如需詳細資訊，請參閱「為鍵盤電池充電」。

## 2. 在平板電腦上：


- 確定平板電腦的藍牙功能已開啟。選擇「設定」>「無線與網路」>「藍牙」，然後確認藍牙已設定為「開啟」。
- 從範圍內的裝置清單中，選擇「鍵盤折疊保護組 S」。

## 3. 在鍵盤上，輸入顯示在平板電腦上的 PIN，然後按下 Enter。

連線成功建立後，狀態指示燈會短暫亮起穩定藍燈，然後熄滅。

## 連線到其他平板電腦

1. 開啟鍵盤電源。
2. 確定平板電腦的藍牙功能已開啟。選擇「設定」>「無線與網路」>「藍牙」，然後確認藍牙已設定為「開啟」。
3. 按下鍵盤上的「藍牙連線」按鈕：

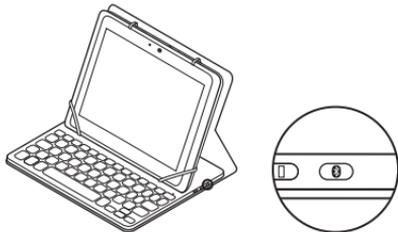

鍵盤會處於可偵測狀態 3 分鐘。

4. 在平板電腦上，從範圍內的裝置清單中，選擇「鍵盤折疊保護組 S」。
5. 在鍵盤上，輸入顯示在平板電腦上的 PIN，然後按下 Enter。


連線成功建立後，狀態指示燈會短暫亮起穩定藍燈，然後熄滅。

## 使用鍵盤折疊保護組

### 兩種檢視位置

鍵盤折疊保護組提供兩種檢視位置，一種用於打字，另一種用於瀏覽。

若要進行打字，請將平板電腦固定座的插槽底座放置到鍵盤正上方的插槽中，對齊內建磁扣使其固定，將其置於打字位置。開啟鍵盤電源：



打字位置

如果在打字位置有一段時間不使用鍵盤，其會自動進入休眠模式。按下任意鍵即可將其喚醒。

若要進行瀏覽，請將平板電腦固定座放置於瀏覽位置。關閉鍵盤電源以節省電池電力：



瀏覽位置

## 狀態指示燈

### 藍牙與電池狀態指示燈

燈號	說明
閃爍綠燈	電池正在充電中。
綠燈	電池已充電 (高於 20%)。
紅燈	電池電力不足 (低於 20%)。請為電池充電。
閃爍藍燈	鍵盤已就緒可進行配對，或正嘗試重新連線到平板電腦。
穩定藍燈	藍牙配對或重新連線成功。


## 功能鍵

 Esc	<b>Fn + Esc</b> ：返回	 Fn + -	音量減小
 1	<b>Fn + 1</b> ：Android 首頁	 Fn + =	音量增大
 2	<b>Fn + 2</b> ：切換應用程式	 Delete Back	<b>Fn + 後退鍵</b> ：向前刪除
 3	<b>Fn + 3</b> ：Android 功能表	 Home ◀	<b>Fn + 向左箭號</b> ：開頭
 4	<b>Fn + 4</b> ：搜尋 啟動平板電腦搜尋功能	 End ▶	<b>Fn + 向右箭號</b> ：末尾
 5	<b>Fn + 5</b> ：鎖定螢幕 鎖定或解除鎖定平板電腦螢幕	 Pg ▲	<b>Fn + 向上箭號</b> ：上一頁
 6	<b>Fn + 6</b> ：網頁瀏覽器	 Pg ▼	<b>Fn + 向下箭號</b> ：下一頁
 7	<b>Fn + 7</b> ：上一首		
 8	<b>Fn + 8</b> ：播放/暫停		
 9	<b>Fn + 9</b> ：下一首		
 0	<b>Fn + 0</b> ：靜音		

注意：

- 若要選取功能鍵，請按住 Fn 鍵不放，然後按下如上所示的按鍵。

## 為鍵盤電池充電

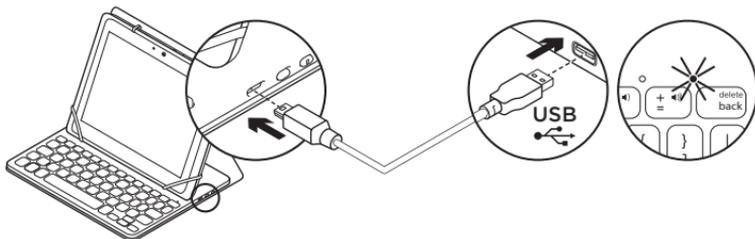

如果狀態指示燈亮起紅燈，表示鍵盤折疊保護組的電池需要充電。

1. 請將 micro-USB 連接的一端插入到充電連接埠，然後將另一端插入到電腦上的 USB 連接埠。

當電池充電時，狀態指示燈會閃爍綠燈。


注意：如果您使用其他充電方式來進行充電時，請注意最大電源輸入為 5V，500mA。

2. 請為電池充電直到狀態指示燈恆亮綠燈為止。

### 電池資訊

- 充飽的電池在每天使用 2 小時鍵盤的情況下，電力可持續使用約 3 個月。
- 開啟鍵盤電源後如果狀態指示燈短暫亮起紅燈，請為電池充電。
- 不使用鍵盤時，請關閉鍵盤電源以節省電池電力。
- 如果在打字位置有一段時間不使用鍵盤，其會自動進入休眠模式。按下任意鍵即可將其喚醒。

## 產品使用壽命告終時的電池棄置指南

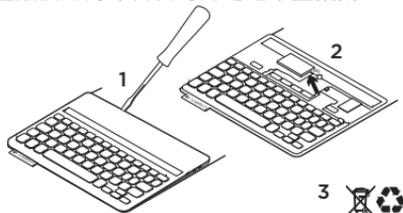

1. 使用螺絲起子撬開鍵盤上蓋。
2. 從電路板上取下電池。
3. 依照當地法令棄置產品及電池

## 造訪「產品中心」

您的產品在網路上還有更多的相關資訊與支援。請抽空造訪「產品中心」，深入瞭解您的新鍵盤折疊保護組。

[www.logitech.com/keyboardfolios](http://www.logitech.com/keyboardfolios)

請瀏覽線上文章，瞭解設定說明、使用秘訣與其他功能的相關資訊。

您還可以和「社群論壇」中的其他使用者保持聯繫以獲得建議、提出問題，以及分享解決方案。

可以選擇各式各樣的精采內容，包括：


- 教學課程
- 疑難排解
- 支援社群
- 線上文件
- 保固資訊
- 備用零件 (如有提供時)

## 疑難排解

### 鍵盤無法正常運作

- 按任意鍵將鍵盤從休眠模式喚醒。
- 關閉再開啟鍵盤電源。
- 為內部電池充電。如需詳細資訊，請參閱「為鍵盤電池充電」。
- 重新建立鍵盤與平板電腦之間的藍牙連線。
- 確認平板電腦的設定中已開啟藍牙功能（「設定」>「無線與網路」>「藍牙」>「開啟」）。
- 在平板電腦上，從裝置功能表選擇「鍵盤折疊保護組 S」。建立藍牙連線後，狀態指示燈會恆亮藍燈。


## 제품 설명

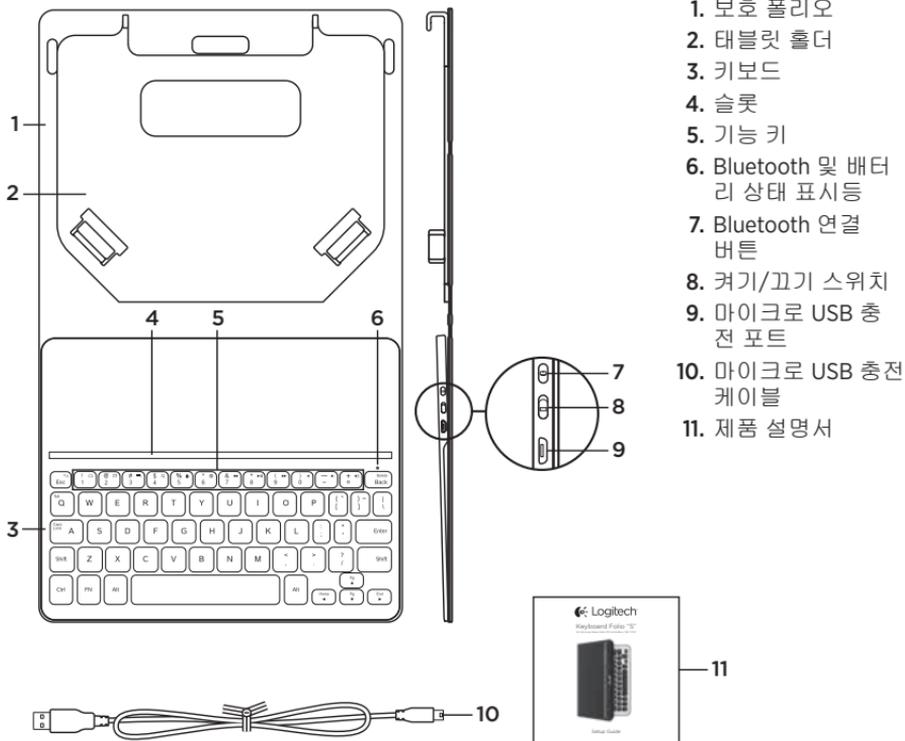


## 키보드 폴리오 설정

### 태블릿 홀더에 태블릿 삽입

1. 키보드 폴리오를 열고 태블릿 상단을 태블릿 홀더의 후크 아래로 밀어 넣습니다.

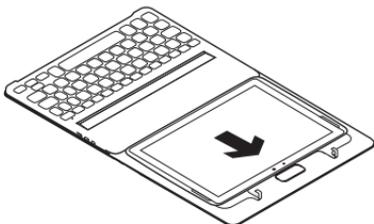

2. 태블릿 홀더 아래쪽에서 두 개의 고무 밴드를 사용하여 태블릿을 제 위치에 고정 시킵니다.

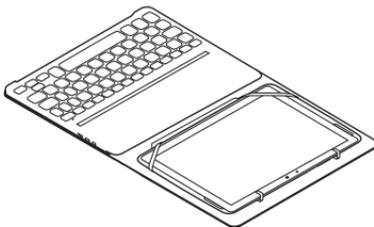


3. 태블릿 홀더를 타이핑 위치로 이동합니다("키보드 폴리오 사용" 참조).

### 태블릿 연결 설정

이 키보드 폴리오는 Bluetooth 연결을 통해 태블릿에 연결합니다. 처음으로 키보드 폴리오를 사용할 때 태블릿과 페어링해야 합니다.

1. 키보드를 켭니다.

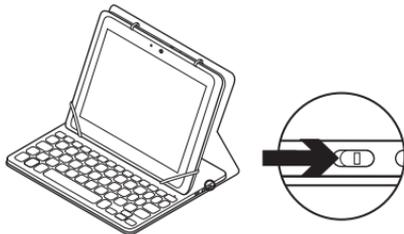

상태 표시등이 파란색으로 깜빡이면 키보드가 검색 가능하고 태블릿과 페어링할 준비가 되었음을 나타냅니다. 처음으로 키보드를 켜면 15분 동안 검색 가능합니다.

상태 표시등이 빨간색으로 바뀌면 배터리를 충전합니다. 자세한 내용은 "키보드 배터리 충전"을 참조하십시오.

## 2. 태블릿:


- 태블릿의 Bluetooth 기능이 켜져 있어야 합니다. '설정 > 무선 및 네트워크 > Bluetooth'를 선택하고 On(켄)으로 설정되어 있는지 확인하십시오.
- 범위 안의 장치 목록에서 “키보드 폴리오 S”를 선택합니다.

## 3. 키보드에서 태블릿 화면에 표시된 PIN을 입력하고 Enter 키를 누릅니다.

성공적으로 연결되면 상태 표시등이 잠시 파란색으로 켜졌다가 꺼집니다.

## 다른 태블릿에 연결

1. 키보드를 켭니다.
2. 태블릿의 Bluetooth 기능이 켜져 있어야 합니다. '설정 > 무선 및 네트워크 > Bluetooth'를 선택하고 On(켄)으로 설정되어 있는지 확인하십시오.
3. 키보드에서 Bluetooth 연결 버튼을 누릅니다.

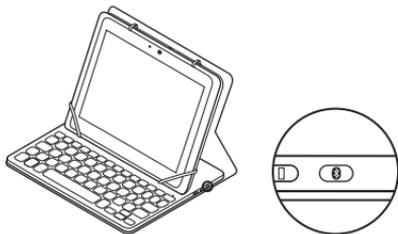

키보드가 3분 동안 검색 가능한 상태로 유지됩니다.

4. 태블릿에서, 범위 안의 장치 목록에서 “키보드 폴리오 S”를 선택합니다.
5. 키보드에서 태블릿 화면에 표시된 PIN을 입력하고 Enter 키를 누릅니다.


성공적으로 연결되면 상태 표시등이 잠시 파란색으로 켜졌다가 꺼집니다.

## 키보드 폴리오 사용

### 두 가지 보기 위치

키보드 폴리오는 두 가지 보기 위치를 제공합니다. 하나는 타이핑용이고 하나는 탐색용입니다.

타이핑하려면 슬롯의 밑면을 키보드의 바로 위에 놓아 내장된 자석과 일렬로 맞춰 고정시킨 후 태블릿 홀더를 타이핑 위치로 이동합니다. 키보드를 켭니다.



타이핑 위치

타이핑 위치에서 잠시 동안 키보드를 사용하지 않는 경우 자동으로 슬립 모드로 전환됩니다. 아무 키나 누르면 작동됩니다.

탐색하려면 태블릿 홀더를 탐색 위치로 설정합니다. 배터리 전원을 절약할 수 있도록 키보드를 끕니다.



탐색 위치

## 상태 표시등

### Bluetooth 및 배터리 상태 표시등

표시등	설명
녹색으로 깜빡임	배터리가 충전 중입니다.
녹색	배터리가 충전되었습니다(20% 이상).
빨간색	배터리 전원이 부족합니다(20% 미만). 배터리를 충전합니다.
파란색으로 깜빡임	키보드가 페어링할 준비가 되었거나 태블릿에 다시 연결을 시도하는 중입니다.
파란색으로 유지	Bluetooth 페어링 또는 연결이 성공적으로 완료되었습니다.

## 기능 키



Fn + Esc: 후면



Fn + 1: Android 홈



Fn + 2: 응용 프로그램 전환



Fn + 3: Android 메뉴



Fn + 4: 검색

태블릿 검색 기능을 실행합니다.



Fn + 5: 화면 잠금

태블릿 화면을 잠그거나 풉니다.



Fn + 6: 웹 브라우저



Fn + 7: 이전 트랙



Fn + 8: 재생/일시 중지



Fn + 9: 다음 트랙



Fn + 0: 음소거



Fn + -: 볼륨 줄이기



Fn + =: 볼륨 높이기



Fn + 백스페이스: 앞쪽 삭제



Fn + 왼쪽 커서: Home



Fn + 오른쪽 커서: End



Fn + 위쪽 커서: Page Up




Fn + 아래쪽 커서: Page Down

## 참고:

- 기능 키를 선택하려면 Fn 키를 누른 채 위에 나열된 키를 누릅니다.

## 키보드 배터리 충전

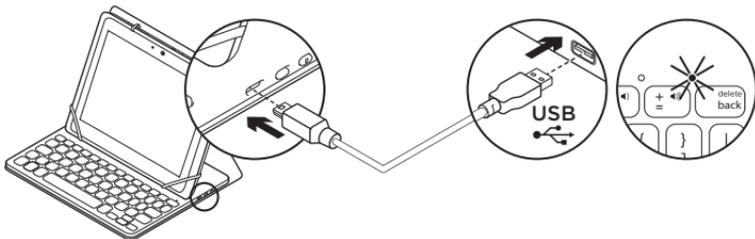

상태 표시등이 빨간색이면 키보드 폴리오 배터리를 충전해야 합니다.

1. 마이크로 USB 케이블의 한쪽을 충전 포트에 연결하고, 다른 쪽을 컴퓨터의 USB 포트에 연결합니다.

배터리를 충전하는 동안 상태 표시등이 녹색으로 깜빡입니다.


**참고:** 대체 충전 솔루션을 사용하는 경우 최대 전원 입력은 5V, 500mA입니다.

2. 상태 표시등이 녹색으로 계속 켜질 때까지 배터리를 충전합니다.

### 배터리 정보

- 배터리를 완전히 충전하면 키보드를 하루 두 시간 정도 사용할 경우 3개월간 사용할 수 있습니다.
- 키보드를 켜를 때 상태 표시등에 빨간색 불이 잠시 켜지면 배터리를 충전합니다.
- 사용하지 않을 때는 키보드를 꺼서 배터리 전원을 절약합니다.
- 타이핑 위치에서 잠시 동안 키보드를 사용하지 않을 경우 자동으로 슬립 모드로 전환됩니다. 아무 키나 누르면 작동됩니다.

## 수명이 다한 배터리 폐기

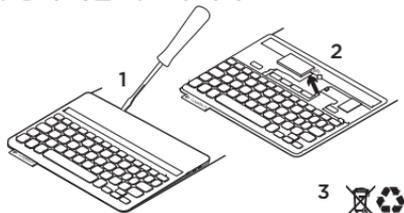

1. 드라이버로 키보드의 위 커버를 엽니다.
2. 회로 기판에서 배터리를 분리하여 빼냅니다.
3. 해당 지역의 법규에 따라 제품과 배터리를 폐기합니다.

## Product Central 방문

온라인상에서 제품에 대한 추가 정보와 지원을 확인할 수 있습니다. Product Central에는 키보드 폴리오에 관한 자세한 내용이 나와 있습니다.

[www.logitech.com/keyboardfolios](http://www.logitech.com/keyboardfolios)

설정 도움말, 사용 팁 및 추가 기능에 관한 정보를 온라인을 통해 찾아 볼 수 있습니다.

Community Forums에서 다른 사용자와 교류하면서 질문과 조언을 교환하고 솔루션을 공유할 수 있습니다.

다음과 같은 다양한 내용을 확인할 수 있습니다.

- 사용 지침
- 문제 해결
- 지원 커뮤니티
- 온라인 문서
- 보증 정보
- 예비 부품(해당되는 경우)

## 문제 해결

### 키보드가 작동하지 않음

- 슬립 모드에서는 아무 키나 누르면 키보드가 작동됩니다.
- 키보드를 끈 다음 다시 켭니다.
- 내장 배터리를 충전합니다. 자세한 내용은 “키보드 배터리 충전”을 참조하십시오.
- 키보드와 태블릿 간의 Bluetooth 연결을 다시 설정하십시오.
- 태블릿 설정에서 Bluetooth가 켜져 있는지 확인합니다(설정 > 무선 및 네트워크 > Bluetooth > 켜).
- 태블릿의 장치 메뉴에서 “키보드 폴리오 S”를 선택합니다. Bluetooth 연결이 설정된 경우 상태 표시등이 파란색으로 계속 켜집니다.

**Complies with  
IDA Standards  
DB101104**

당해 무선설비는 전파혼신 가능성이 있으므로  
인명안전과 관련된 서비스는 할 수 없음

依據台灣「低功率電波輻射性電機管理辦法」規定：

第十二條 經型式認證合格之低功率射頻電機，非經許可，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。

第十四條 低功率射頻電機之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前項合法通信，指依電信法規定作業之無線電通信。低功率射頻電機須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。



[www.logitech.com](http://www.logitech.com)

© 2013 Logitech. All rights reserved. Logitech, the Logitech logo, and other Logitech marks are owned by Logitech and may be registered. Samsung, Galaxy and Note are trademarks of Samsung Electronics Co., Ltd. Nexus and Android are trademarks of Google, Inc. All other trademarks are the property of their respective owners. Logitech assumes no responsibility for any errors that may appear in this manual. Information contained herein is subject to change without notice.

621-000179.002