

F-1300W

SPEAKER SYSTEM



The F-1300 Series Speaker are compact two-way speaker systems designed for high efficiency, wide range, and high power input handling capability. These speaker systems can be installed in a manner ideal for the location and intended application.

Key features


- Compact wide-dispersion speaker
- Up to 150 W continuous program
- Dispersion angle of 90° x 90°
- 2-way speaker with high quality 13 cm woofer and balanced dome tweeter
- Paintable

Specifications

Enclosure	Bass-reflex type
Power Handling	Continuous pink noise: 50 W Continuous program: 150 W
Rated Impedance	8 Ω
Sensitivity	90 dB (1 W, 1 m) at installation in 1/2 free sound field
Frequency Response	80 - 20,000 Hz, -10 dB at installation in 1/2 free sound field
Crossover Frequency	2 kHz
Directivity Angle	Horizontal: 110°, Vertical: 100°
Speaker Component	Low frequency: 13 cm (5) cone-type High frequency: 25 mm (1) dome tweeter
Input Terminal	Push-in terminal
Finish	Enclosure: HIPS, white Punched net: Surface-treated steel plate, white, paint Joint bracket, wall bracket: Steel plate, t1.6, white, paint Speaker bracket: Die-cast aluminum, white, paint
Dimensions	162 (W) x 250 (H) x 161 (D) mm (6.38 x 9.84" x 6.34")
Weight	3.1 kg (6.83 lb) (including the supplied brackets)
Included Accessories	Speaker bracket ...1, Joint bracket ...1, Wall bracket ...1, Bracket fixing screw ...1 set
Optional Accessories	Board hanger bracket: HY-BH10B Ceiling mount bracket: HY-CM10W (used for the horizontal speaker mounting) Cluster bracket: HY-CL10B Speaker stand: ST-16A


Note: Bolts and nuts for mounting the bracket to the wall or ceiling are not included.
Prepare them separately.

Dimensions


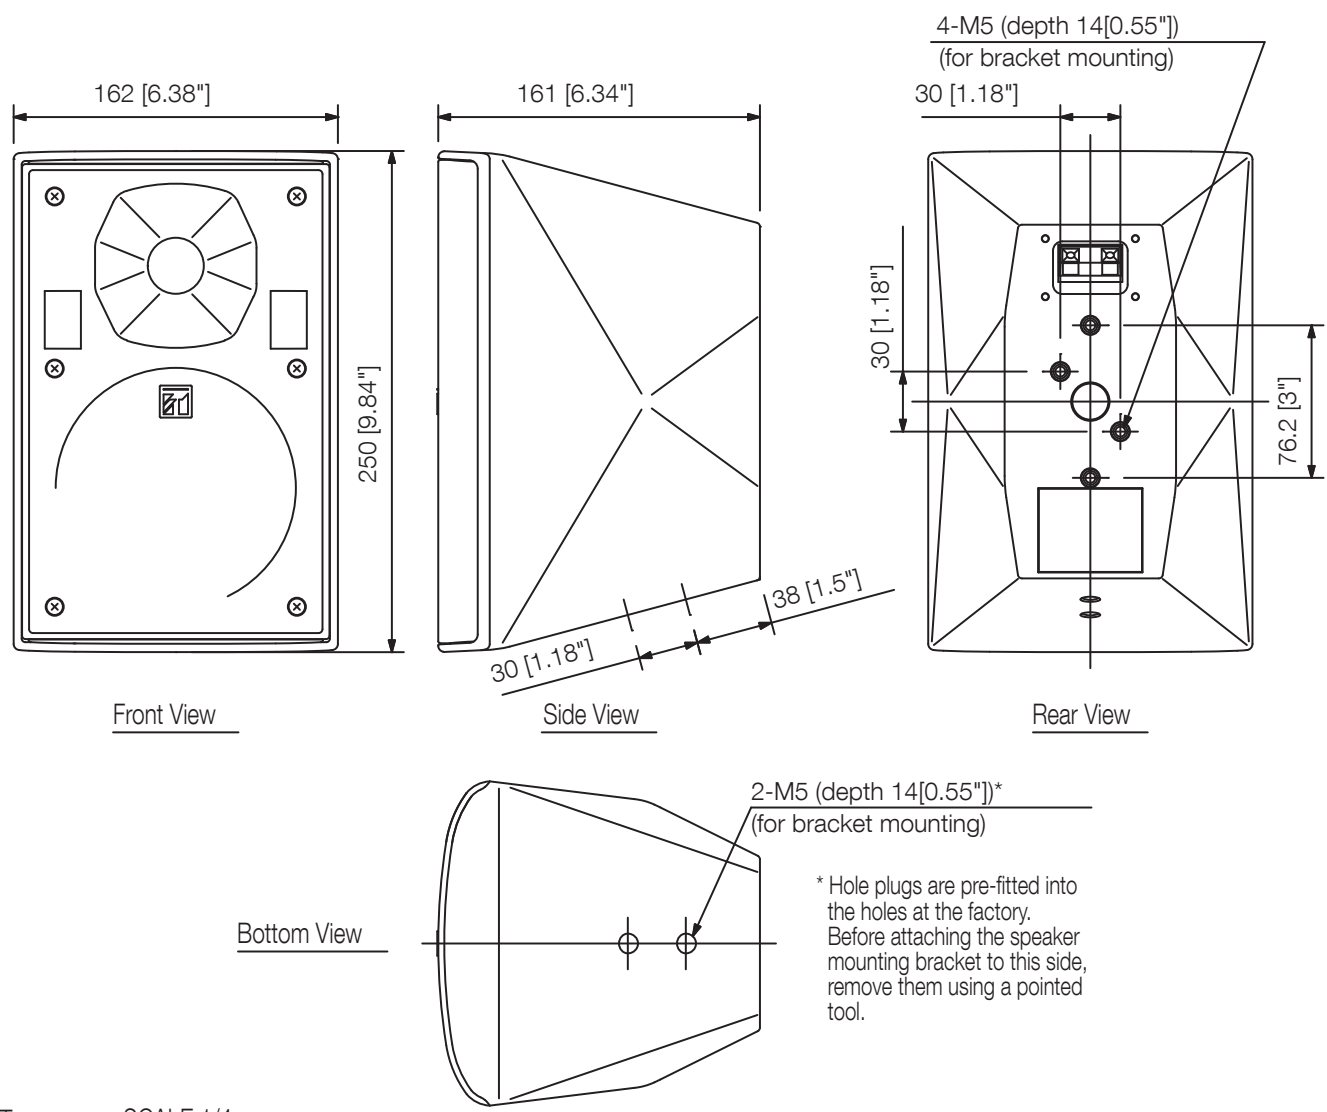


UNIT:mm SCALE:1/4

Dimensions

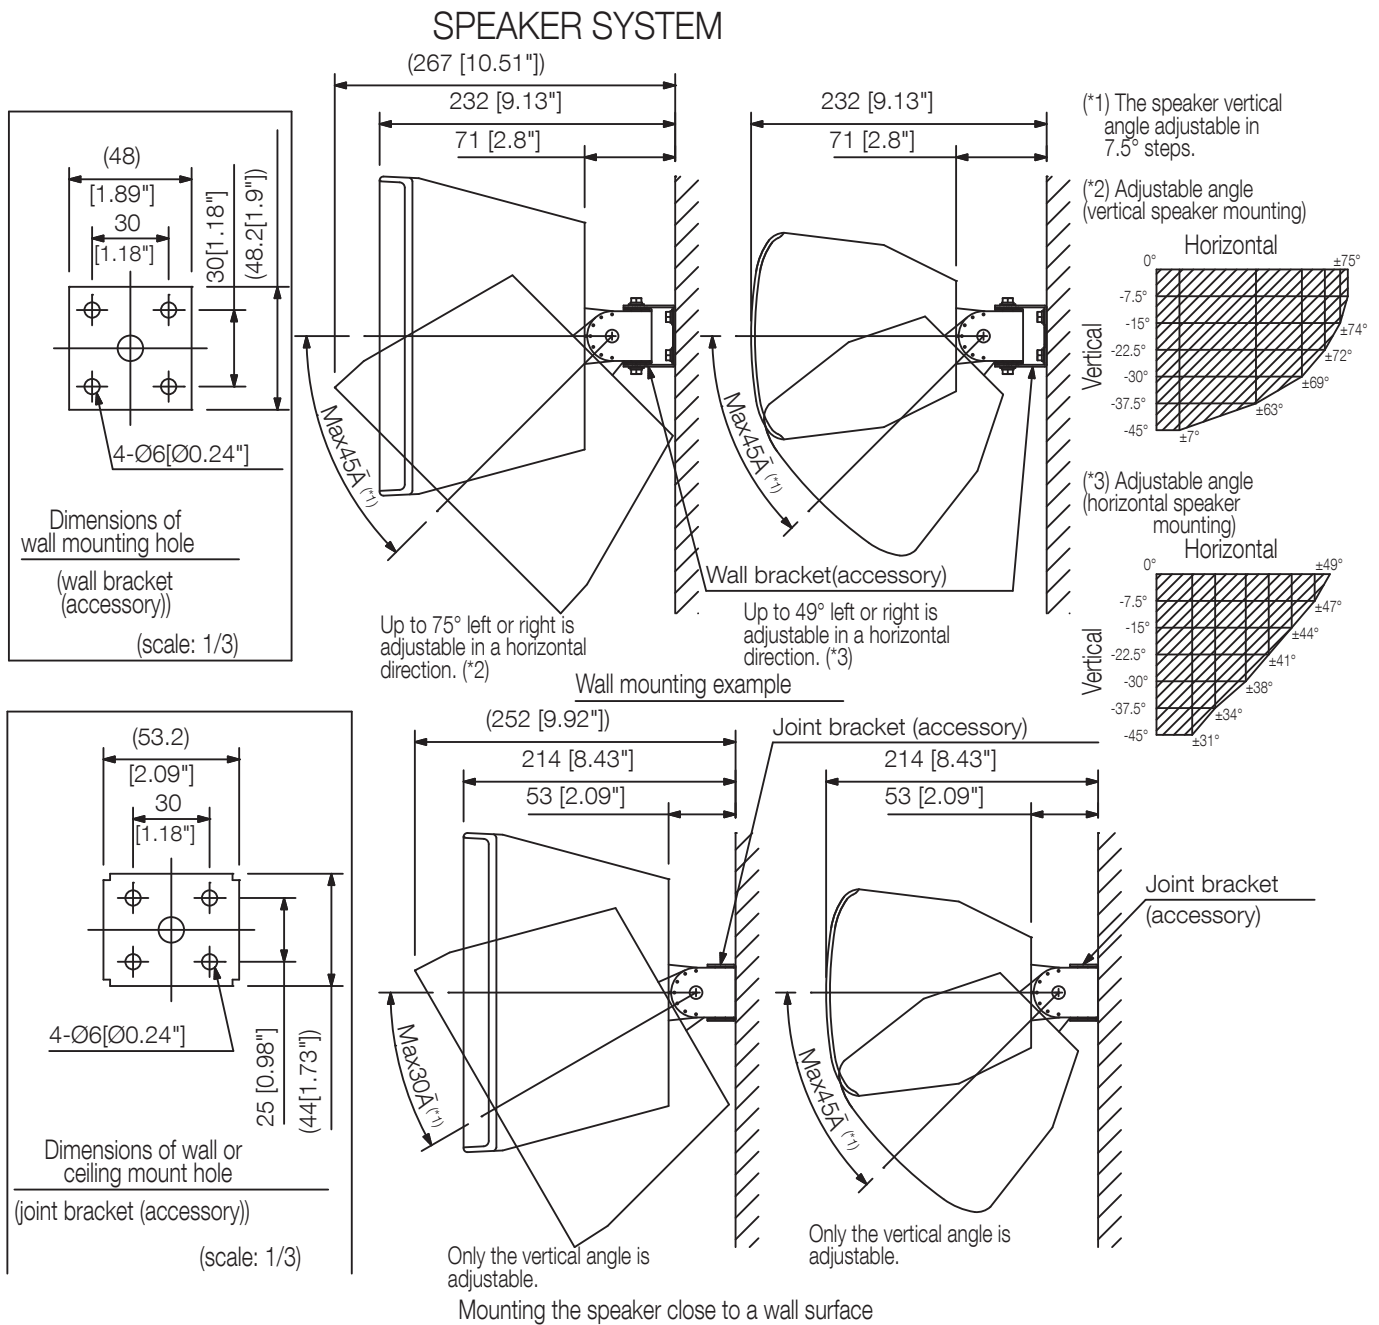

Dimensions

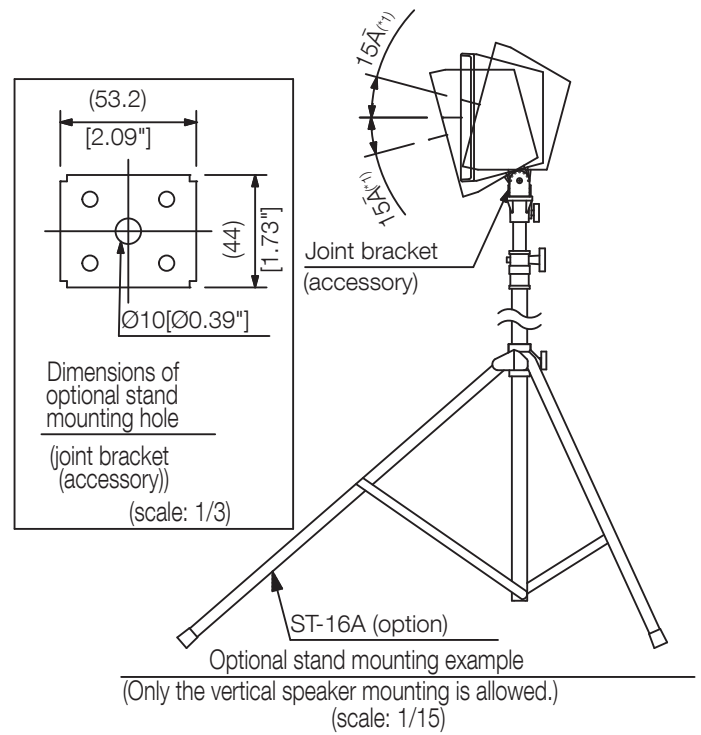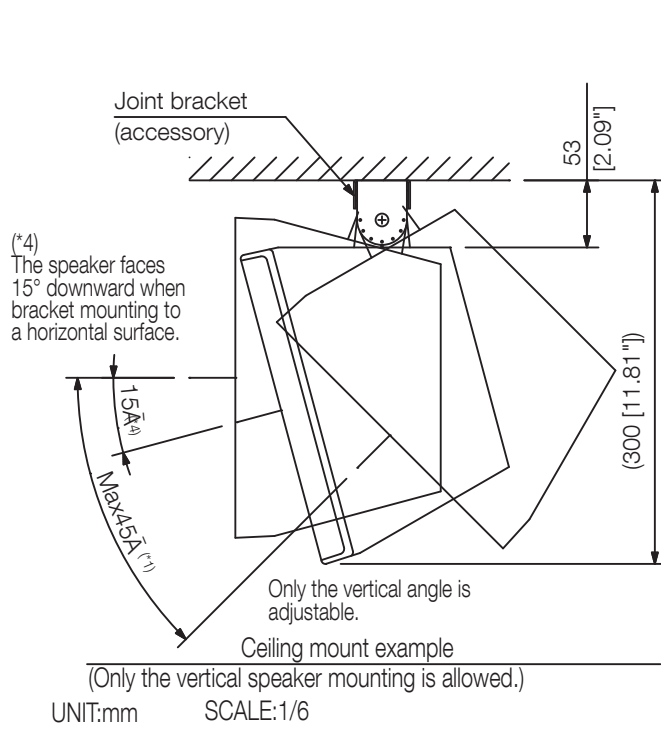

A&E specifications

The speaker shall be a two-way bass reflex enclosure suitable for ceiling or wall mounting. The low frequency component shall be a 13 cm (5") cone-type woofer. The high frequency component shall be a 25 mm (1") dome tweeter. For clear, wide-area sound coverage, the speaker shall be 110° (H) x 100° (V) wide dispersion angle high frequency horn. The speaker shall come with separate HF and LF protection circuitry.

The speaker shall be rated at 8 ohms. The sensitivity at a distance of 1m with a 1W input level applied shall be 90 dB. The rated power handling shall be 50 W continuous pink noise and 150 W continuous program. The speaker shall have a frequency response of 80 to 20 kHz.

The speaker enclosure shall be constructed of HIPS resin. The speaker shall be available in white or black, and also be repaintable. The grille shall be a surface treated steel plate. Brackets for speaker stand, wall and ceiling installation shall be included. There shall be also optionally available brackets for more demanding installations.

The unit shall be compact and lightweight with dimensions of 162 x 250 x 161 mm (6.38" x 9.84" x 6.34") and a weight of 3.1 kg (6.83 lbs.).

The speaker shall be a TOA model F-1300B/F-1300W.

The board hanger bracket shall be the HY-BH10B.

The ceiling mount bracket shall be the HY-CM10B/HY-CM10W.

The cluster bracket shall be the HY-CL10B.

The subwoofer shall be the FB-120B/120W.