


# Three Mode WiFi Switch

Model: TYWB 2CH 85V~250V RF

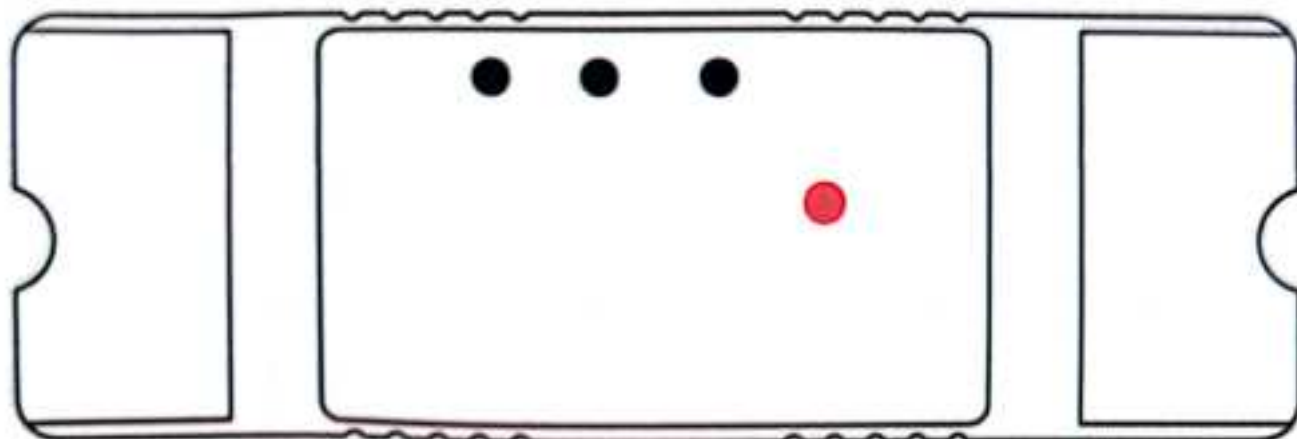

## Parameters:

Input voltage: AC 85V~250V

Max.Current:2200W/10A/gang

Wireless:Wi-Fi 2.4ghz b/g/n+Bluetooth

Radio Frequency:433Mhz

Working temperature: -20°C~70°C

Size: 116\*38\*25mm

## Checklist before using the device

- Your smart phone or tablet has connected to a 2.4g WiFi with internet.
- You need to enable Bluetooth of the phone.
- You have the correct WiFi PWD.
- Your smart phone or tablet must have access to APP store,Google play.
- Your router is MAC-open.

# User Guide


- 1 You can download the App by searching "Tuya Smart" in mobile app stores or scanning the following QR code



- 2 Register an Tuya Smart account.
- 3 If you have Tuya Smart account. just login.
- 4 Power on.

ON/OFF operating principle:

The connected appliances work/stop through live wire power on/off.

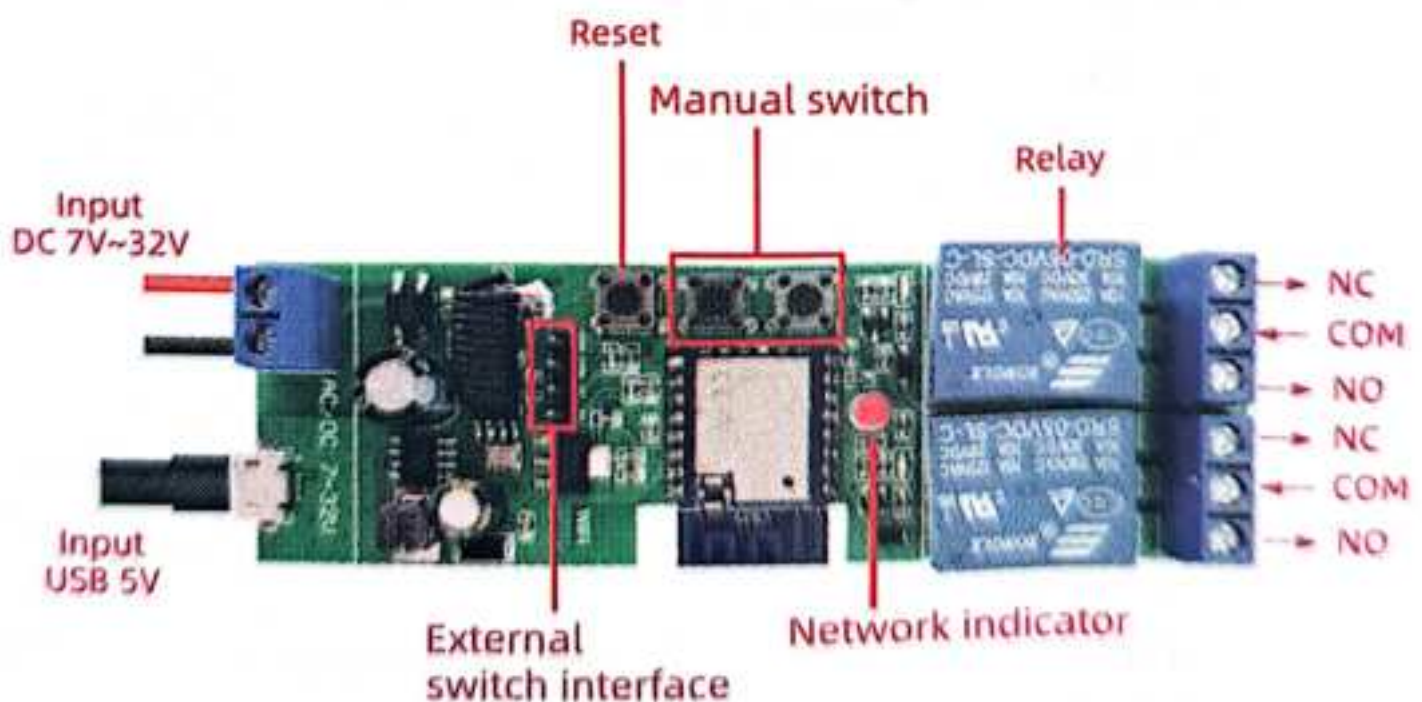



## self-locking 1



## Add devices


### ① Reset the device first:

if the network indicator blinking fast (0.5S/time) , skip the reset step.

① Power on

② hold down the Reset button for 5 seconds. until network indicator(red light) blinking fast(0.5s/time).

### ② Clicking in the top right corner on tuya smart app. then click "Auto Scan" ,wait a few seconds, After the devices are found,Click "Next"

< Add Manually Auto Scan 


Automatically discover Bluetooth/Wi-Fi/Zigbee/wired devices when the corresponding permission is turned on

Ensure that the device is ready for network connection.

- ③ Select a 2.4GHz Wi-Fi network and enter your password.



- ④ Name your device.

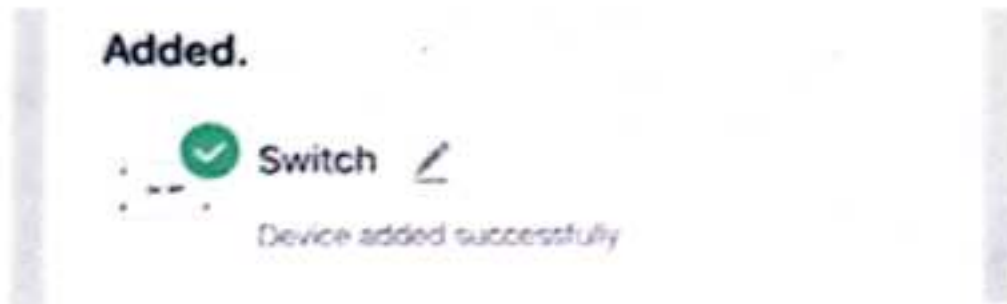


- ⑤ When the network indicator is on, the device is online.
- ⑥ When the network is disconnected, the switch will automatically switch to the Bluetooth control of the phone.
- ⑦ Click the on/off buttons on the APP can control device, Manual control switch also can be display real-time on the APP.

## APP Function



Tip here to enter the full function operation interface.

2

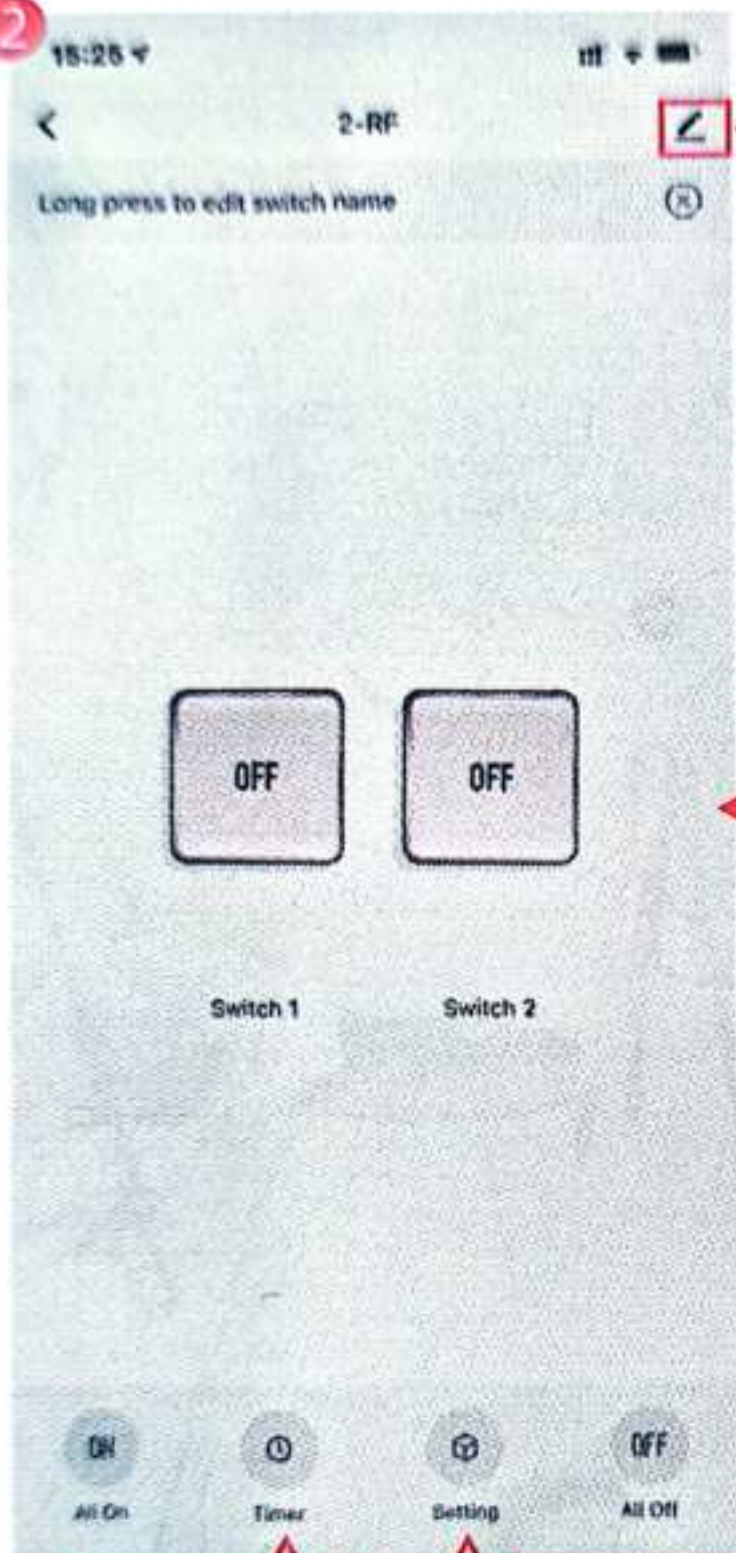

Rename  
/Offline Notification  
/Third-party Control  
/Share Device  
/Create Group  
/Device Update  
/Rmove Device

Long press the switch  
to change the name

/Countdown  
/Schedule  
/Circulate  
/Random  
/Inching

/Relay Status  
/interlock setting  
/RF remote control setup



# Remote control matches the code

## Matching:

- ① Figure ② interface, click setting> RF remote control setup>Add.
- ② When the prompt interface pops up, then long press the remote control button you want to match
- ③ loosen the remote control buttons, matching success.
- ④ Added successfully, assign the remote control buttons to the switches that need to be controlled

\*match other buttons, repeat steps ① to ④.

## Delete:

- ① Figure ② interface, click setting> RF remote control setup, Swipe the remote control to be deleted to the left, and click the delete on the right.

## TROUBLESHOOTING

### Solutions for the failure of product matching and offline:

Enter the homepage of App, click the icon in the lower right corner of the interface to enter.

