



SP3609 MVMT BT Speaker User Manual

Product Diagram

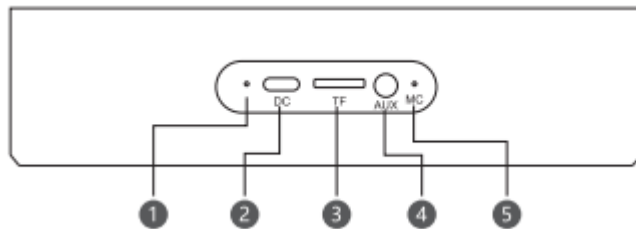

1. LED indicator 2. DC in slot 3. TF in slot 4. Aux in slot 5. MIC


KEY Press-control Diagram

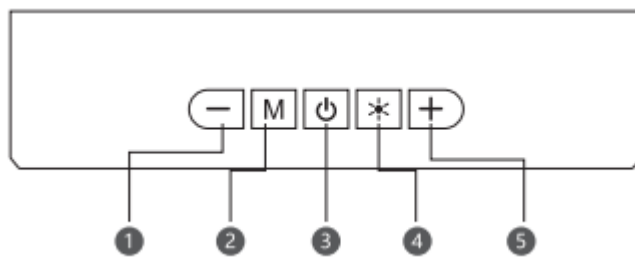

1. Short Press : Previous Song
Long Press: Volume Decrease
2. Short Press: To select Bluetooth / FM
Long Press: To select FM Channels(Automatically select channels when FM mode)
/Disconnect bluetooth
3. Short Press: Play/Pause/ Answer call /End call
Long Press (3 seconds): Power on/Power off
Long Press : Reject call(2 seconds)
Long Press (10 seconds): Reset
Press Twice: TWS Turn On/Turn Off
4. Short Press: Light Mode(9 modes)
Press Twice:Light On/Off
5. Short Press:Next Song
Long Press: Volume Increase

How to charge

1. Connect the USB cable to DC slot, and the other end of into Phone charger 5V/2A.
2. Back side Red small light turns on during charge, after fully charge red light off.
3. The charging time is about 3 hours (it may take longer if you are charging from a computer).
4. After charging, kindly unplug the USB charging cable, if charging time is too long will accelerate battery deterioration.

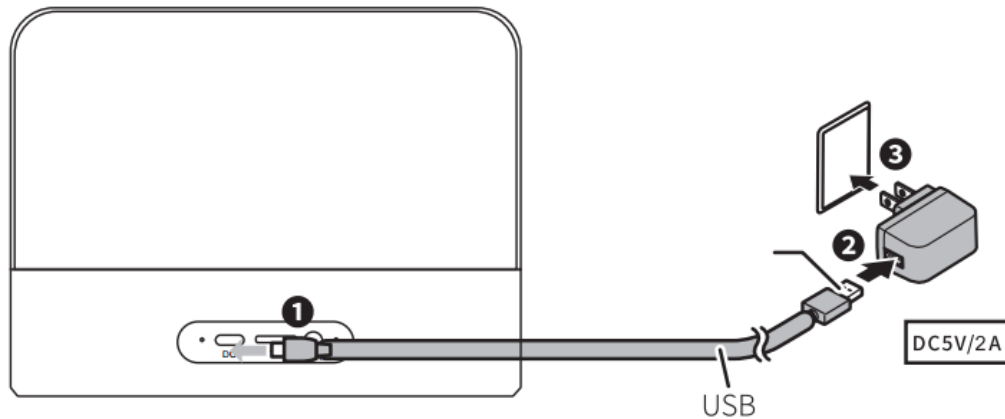

Functions to Understand

LED Indicator

RED: During charge RED LED On / After fully charged RED LED Off

BLUE: Blue LED flashes fast continuously waiting to PAIR Bluetooth or searching FM Channels.

After Paired ,Pause or FM channels searched fully BLUE LED remain constant On.

While playing MUSIC via Bluetooth, TF card, FM Radio & AUX, BLUE LED flashes slowly.

How to connect the mobile phone

1. Power On speaker -Blue LED Flashes Continuously
2. Turn on Phone Bluetooth, select search for : **MV_SP3609** then Connect and pair.
(After paired, the speaker has memory function, when use another phone , disconnects the paired phone's bluetooth then pair again).
3. After Pairing BLUE LED flashes slowly.


Hands-free Function for SPEAKER

Short press ☎ button to answer the phone call .

Long Press ☎ button 2 seconds to reject the phone call.

Press ☎ button to Disconnect the phone call.

How to Connect Same Second Speaker using TWS Mode

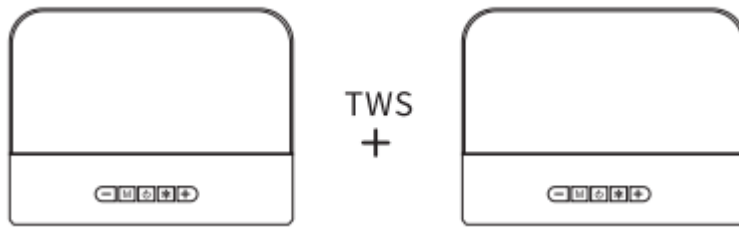

1. Turn on 2 Speaker , Select Bluetooth mode, Double click Speaker  button , it will automatically search for another to connect. There will be prompt sound after successful connection, with this TWS mode you can play the same song at same time in both speakers by using your mobile.
2. The Host speaker BLUE LED Indicator flashes fast and the second speaker BLUE LED Indicator steady, which means both speakers successfully paired, both speakers automatically convert into the Left & Right sound channel.

NOTE:

1. This TWS mode can be used with 2 same Model No: **MV_SP3609** Turned On.
2. Before selecting TWS mode the speaker may not connect to any device though Bluetooth.
3. To disconnect TWS Mode, double-click  button of any speaker.
4. Speaker remembers TWS pairing, and it will automatically connect with the original pairs of speakers once it is turned On.
5. Turn off any of the speakers in TWS mode, the other speaker will turn off at the same time.

How to use AUX in (External Audio Input)

Turn on the speaker, Insert 3.5m audio jack into the Speaker AUX input and another side of 3.5m AUX jack into Mobile or Computer Headphone Output. Press M to switch to AUX mode.

How to use TF card

1. Turn on the speaker, insert the music TF card into the TF Slot, it will automatically select TF Mode and Start to play the Music files.
2. TF slot supports format file: MP3 WAV .
3. TF Slot supports maximum 32G TF Card.

How to use FM Radio

Press “M “Button to select FM Radio mode, insert 3.5 mm AUX cable (it will work as FM Antenna) Long press “M “Button to search FM Channels automatically.

Press M button to switch to the radio mode, insert 3.5 MM Aux cable as FM antenna into the speaker AUX in jack. Long press M button to search channels automatically.

Energy Saving Auto Mode

1. Speaker may Shut Down automatically if the Bluetooth mode is waiting to pair for 2 hours.
2. Speaker may Shut Down automatically after the TF Card / Radio / AUX mode is suspended/ disconnected for half an hour.

Charging Note:

1. Use the certificated charger.
2. The charging voltage is **5V**, only use **5V** charger compatible with the speaker, if use charger more than **5V** it may damage the parts inside.
3. When Battery is LOW, there will be a prompt sound. Kindly charge the speaker ASAP by using computer USB port or (**5V-2A**) mobile phone charger. Back side Red small light turns on during charge, after fully charge red light off.

4. Charging time & playing time

Model No	Charging Time	Playing Time	Playing Time
K9	Around 3 Hour s	Around 3-4 Hours(100%Vol)	Around 4-5 Hours(50%Vol)

Troubleshooting

1. Multiple Pairing failed

A Re-boot for pairing

B Too many Bluetooth speakers surrounding the **MV_SP3609** makes it difficult to search. Turn Off other devices.

2. Sound too Low or Distorted

A Battery is too LOW.

B Increase the Volume

3. Bluetooth Music stops Suddenly.

A Check the connection distance between Mobile and Speaker (under 10 M)

B Wall obstruction between Mobile and speaker

4. **In case of crash** :Long press  button for 10 seconds to reset.

5. **In TWS mode**: the vice speaker will automatically shut down when power low, recharged before use.

Product Specification

Product name: MVMT BT Speaker

Speaker Model No.: SP3609

Bluetooth Pairing name: MV_SP3609

Bluetooth solution : Bluetrum

Voltage: DC5V 2A

Bluetooth version: 5.4

Transmission distance: ≤10 m

Speaker size : 1.5 inch

Rated output power: 3W*2

Battery capacity: 1200mAh

Charging time: around 3 hours

Playing time: around 3-5 hours

USB charging cable length: around 50CM

Product size: 178*52*120MM (L*W*H)

Product weight: around 320 g

Accessory: charging cable

FCC STATEMENT:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Warning: Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.

- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

- Consult the dealer or an experienced radio/TV technician for help.

RF warning statement:

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.