

**LASER**

# User Manual




**Clock Radio with Wireless Charging**  
SPK-WCALC-118


# WHAT'S IN THE BOX

- Clock radio
- 240V Wall power charger
- USB-A to USB-C charging cable
- 3.5mm to 3.5mm audio cable
- Clamp and screw (to secure the power cable)
- User manual

# OVERVIEW

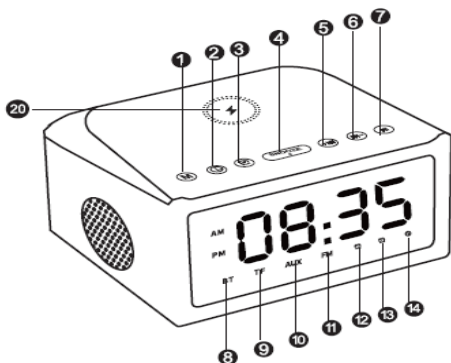

- |                                   |                        |
|-----------------------------------|------------------------|
| 1. Mode                           | 8. Bluetooth           |
| 2. Clock                          | 9. TF (USB / Micro SD) |
| 3. Alarm                          | 10. AUX                |
| 4. Snooze / Brightness adjustment | 11. FM radio           |
| 5. Vol+ / Previous track          | 12. Alarm 1            |
| 6. Vol- / Next track              | 13. Alarm 2            |
| 7. Play / Pause                   | 14. Low battery        |



- |                            |
|----------------------------|
| 15. On/Off switch          |
| 16. USB-C port (Power)     |
| 17. USB-A port (Media)     |
| 18. Micro SD card slot     |
| 19. AUX port               |
| 20. Wireless charging area |

# OPERATIONS

## Connecting to power




1. Connect the supplied USB-A to USB-C cable to the clock's USB-C port.
2. Connect the other end to the supplied 240V wall power charger.
3. Connect the charger to power.

## Wireless Charging

- Place your phone on the wireless charging area of the clock.


**NOTE:** The clock must be powered by the mains power for wireless charging to work.

## Set Time





1. Press the  button to switch between 12/24-hour modes.
2. Hold down the  button to start setting the time; the hour digit will start blinking.
3. Press the  button to switch between hour/minute settings.

# OPERATIONS

continued...

4. Use **+⏮** and **⏭-** buttons to adjust the values.
5. Press and hold the  button to save the time.

## Set Alarm

1. Press the  button to switch between Alarm 1/Alarm 2 modes.
2. While alarm icon is flashing on the screen, press and hold the  button to start setting the alarm.
3. Press the  button to switch between hour/minute/On-Off/ringtone/volume/snooze duration settings.
4. Use **+⏮** and **⏭-** buttons to adjust values.
5. Press and hold the  button to save the alarm.

## Alarm and snooze functions

- Alarms are active when alarm symbols appear on the display.
- While the alarm is ringing, press the Snooze button to activate snooze; press any other button to turn it off.

# OPERATIONS

continued...

- At other times, go through the alarm setting process to turn on/off the alarm.



## Switch Mode

Press the  button repeatedly to switch between Bluetooth /FM radio/Micro SD/USB/AUX modes.

## Adjust the display brightness

Press the Snooze button to adjust the brightness between Off, Low, Medium and High. The default is High.

## Control the volume

- Hold down the  button to increase the volume.
- Hold down the  button to decrease the volume.

## Select previous/next song

- Press the  button to skip to the previous song.

# OPERATIONS

continued...

- Press the **▶▶-** button to skip to the next song.

## FM Radio Mode

- Press the **(M)** button to switch to FM mode.
- Long press the **▶||** button to automatically scan and save radio stations.
- Press **+◀◀** and **▶▶-** buttons to select preset stations.

## USB / Micro SD Mode

Insert a USB flash drive or Micro SD card to switch to the TF mode, or press the **(M)** button to switch.

## Aux Mode

1. Connect the supplied 3.5mm audio cable into the clock's AUX port and the headphone jack of the external device.
2. Press the **(M)** button to switch to AUX mode.

# BLUETOOTH

## Pairing

1. Press the **(M)** button to switch to Bluetooth mode.
2. Enable Bluetooth on your connecting device. It will search for nearby Bluetooth devices.
3. Select "SPK-WCALC-118".  
**NOTE:** If "SPK-WCALC-118" does not appear on your connecting device's screen, try again from the beginning of step 1.
4. Confirm Bluetooth pairing request on your connecting device.
5. Now, audio you play on your connected device should come through the clock's speakers.

**NOTE:** The clock only connects to one device at a time.

Use your device to control music playback and volume, or use **▶||**, **+◀◀** and **▶▶-** buttons on the clock.



# BLUETOOTH

continued...

## **Answer/Hang up a call**

When there is an incoming call. Press the ►|| button to answer the call.

Press again to end the call.

## **Reject a call**

When there is an incoming call, hold down the ►|| button to reject the call.

## **Disconnecting/Unpairing:**

- To disconnect, turn off the connected device's Bluetooth.
- To unpair (remove the connection entirely), go to the connected device's Bluetooth settings, find "SPK-WCALC-118" on the list of paired devices, and select "Forget" or "Unpair".

# SECURE THE POWER CABLE

Use the supplied clamp and screw to secure the power cable.

1. Run the supplied USB-A to USB-C cable through the clamp.
2. Plug in the cable to the clock's USB-C port.
3. Attach the cable to the clock by placing the screw through the clamp, into a recess, and tightening it.



# TROUBLESHOOTING

## **Clock does not turn on**

- Make sure the On/Off switch at the back of the clock is in On position.
- Press the Snooze / Brightness Adjustments button several times to increase the brightness of the display.
- The built-in battery is completely discharged. Plug the clock to power.

## **Wireless charging is not working**

- Make sure your phone supports wireless charging.
- Make sure the clock is plugged into mains power using the supplied power adaptor and cable.
- Make sure your phone is correctly aligned on the wireless charging area.
- Remove any objects between your phone and the clock.
- Restart your phone.

# TROUBLESHOOTING

continued...

## **No sound**

- The volume level is low or muted. Unmute or increase the volume.
- If paired with a Bluetooth device, unmute or increase the volume level on the connected device.

## **Cannot pair a Bluetooth device with the clock**

- The connecting device is out of range. Bring the device closer to the clock.
- Make sure the clock is in Bluetooth mode. If not, press the **(M)** button to switch to Bluetooth mode.
- If the clock's Bluetooth name is not found on the Bluetooth list, refresh the list, or search again and wait up to 1 minute for the device to appear.
- If the clock is already paired with another device, disconnect or unpair before connecting to the second device.

# SPECIFICATIONS

Bluetooth version	5.0
Wireless charging power	5 W / 7.5 W / 10 W
Built-in battery	1,200 mAh
Max. USB/Micro SD capacity	32 GB
Supported media formats in TF (USB/Micro SD) mode	MP3
Power adaptor	Input: AC 100–240V, 50/60Hz Output: 5VDC 3A, 9VDC 2A, 12VDC 1.5A
Dimensions	128(W)x108(D)x80(H) mm
Weight	442 g

*Thank you  
for your purchase!*

Laser Corporation is 100% Australian owned & operated. To get the most out of your product please read the user manual carefully and keep for future use.

For specific information relating to your product such as Spare Parts, FAQs, Warranty claims, and more, please scan the following QR code:



Visit our website  
[www.laserco.com.au](http://www.laserco.com.au)



Check us out at  
[www.youtube.com/lasercoau](http://www.youtube.com/lasercoau)



**LASER**