



## **Dekala ArkenStone™ Smart Light Therapy Alarm Clock**

---

### **Instructions**

Please read the instructions carefully before use and keep it with proper storage

(V1.0)



-Scan QR Code to Download User Manual-




## CONTENTS

|                           |    |
|---------------------------|----|
| Elements .....            | 01 |
| Controls .....            | 01 |
| Feature Description ..... | 02 |
| Quick Guidance .....      | 03 |
| App Guidance .....        | 04 |
| Voice Control .....       | 15 |
| Usage .....               | 19 |
| Specification .....       | 30 |
| FAQ .....                 | 30 |
| Notes .....               | 32 |

## Elements

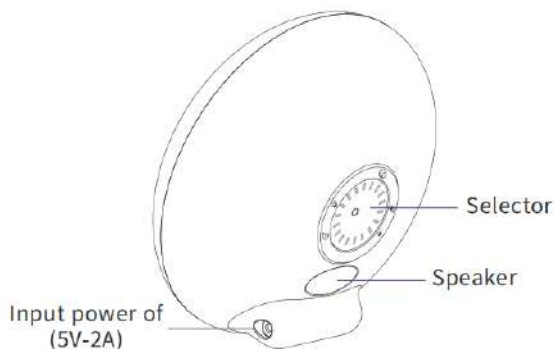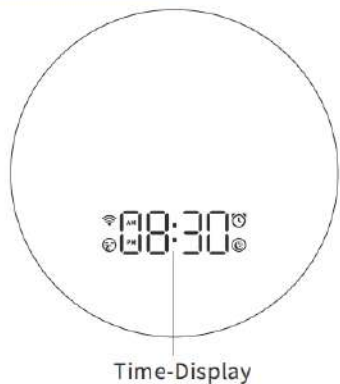

## Controls



Selector



Alarm clock



Sleep-aid



Snooze/Wi-Fi



Volume



Setting

## Feature Description

- This product is a smart product integrating wake-up alarm clock, colorful atmosphere lamp and sleep-aid white noise.
- The product is aesthetically designed to a candy-drop shape, can be used both horizontally and vertically to let you have a multi-angle lighting experience.
- The 360° HD reflective casing allows a better visibility on the Time-Display. The time-display visibility(brightness) is adjustable from level 1 to level 4(can also be completely hidden if wanted to). making sure it's always suitable for every occasion in your life.
- Automatic time calibration when connecting to Wi-Fi,Time-Display system can be switch between duodecimal hour system(12-hour clock) and military time(24-hour clock).
- Comes with two sets of alarm clock, simulate the sunrise lighting effect,gradually lights up 5-120 minutes(brightness increasing rate changes accoridingly) in advance before your preset wake-up schedule. Tip the device over or set the device upright to re-enter snooze mode.
- Lighting color selectable from a 16-million digital pallet, customize your favourite color by a touch of your finger and create your own vibe in your room.
- The relaxing night light simulates the fireplace, brings you harmony before turning in, naturally boost your melatonin at night so you can have a good dream!
- 9 uniquely designed ambient lights optional, freely turn on any one of them for all the beautiful momments in life!
- Specially designed Hi-Fi speaker is built on a uniquely designed sound chamber, offers an immersive experience with premium sound.
- Arkenstone comes with 11 selectable sleep-aid white noises and 10 lighting effects, volume adjustable from level 1 to 10 . Your whole family can enjoy inner peace after the light/sound gradually mutes within a preset time range (5-120 mins).
- App remote control, freely turn on/off your favourite light as well as enter all settings in detail on your smartphone(iOS and Android both available).
- Voice control, supports Amazon Alexa and Google Home, makes your already-smart lifestyle even smarter!

# Quick Guidance

## General functions and settings

### Color Light

Press  to turn on the light, rotate  to adjust the brightness, press  again to switch the light mode.  
Double-press  to switch color/style under the current ambient light mode(some of the 9 ambient light modes come with more than one color option, please see page 27 and page 28 as reference ). Long-press  for 3 seconds to turn off the light.

### Sleep-aid


#### Sleep-aid

Press  to switch on/off sleep-aid mode.  
Long-press  to enter setting, rotate  to select, press  to apply and continue to more detailed settings.

### Alarm Clock

#### Alarm clock

Press  to turn on/ off the alarm.  
Long-press  to set the alarm, rotate  to adjust the time and press  to apply and continue to more detailed settings.



**Attention:** During the connecting process, if there is no action within 15 seconds, device would resume to its home screen.

### Volume Function

#### Volume

press  to enter the volume adjustment, rotate  to adjust the volume.

### Time-Display

#### Setting

Press  to adjust the visibility (brightness) of Time-Display.  
Long-press  to manually calibrate the hour and minute, press  to confirm.

### Wi-Fi Connecting

Plug in to power,  flashes to enter Wi-Fi connecting status. If Wi-Fi connection fails, Long-press  to enter compatible mode (  flashes more slowly) and wait a few seconds to enable the device re-try connecting to your Wi-Fi.

If  stays solid (not flashing at all), Long-press  to enter Wi-Fi connecting status. (  flashes after successfully enters Wi-Fi connecting status)

# App Guidance

## Wi-Fi Setup

### 1. Download the App


Download "Smart Life" from App Store / Google Play or Scan the QR code, sign up and log in.




**Attention:** Turn on GPS location, Wi-Fi (2.4 GHz only) and bluetooth before connecting device to your Wi-Fi (2.4 GHz only), then you can choose auto-search and connect or manually connect.

### 2. Wi-Fi connecting mode

- ① Plug in to power, the flashing  indicates the device is now under Wi-Fi connecting mode;
- ② If the  stays solid, Long-press  till  flashes to enter Wi-Fi connecting mode.

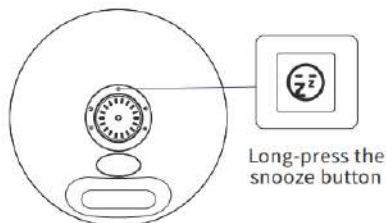

Long-press the  
snooze button

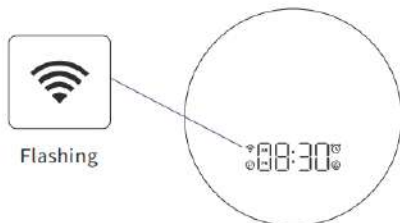


Flashing

**Attention:** Connect to 2.4 GHz Wi-Fi only.


## Connect device to App

### App auto-search and connect


① Open up "Smart Life" App, click "+";

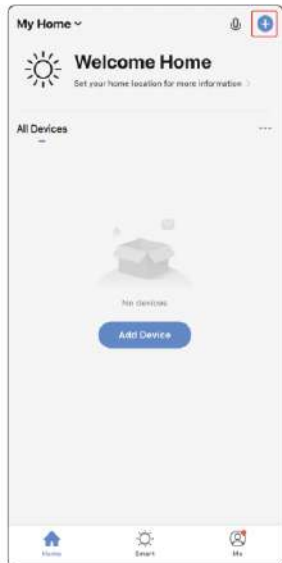

② Click on "Go to add";

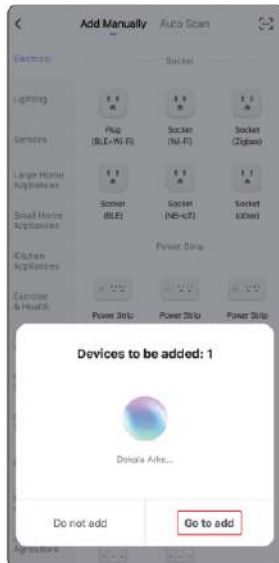


③ Select the device you want to connect with "Smart Life" App and click "+" on the right.

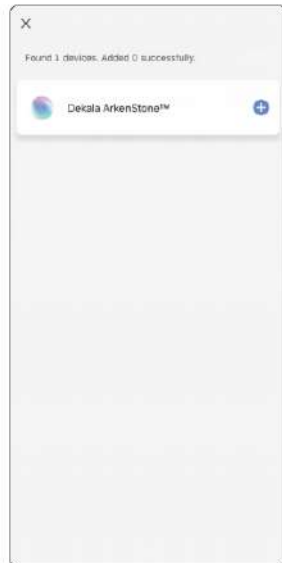

④ Type in 2.4 GHz Wi-Fi password and click on **"Next"** (make sure the smartphone and Smart Life App are both connected to 2.4 GHz Wi-Fi);



⑤ Put the device, your smartphone and the router in the same area when connecting (as closely as possible);

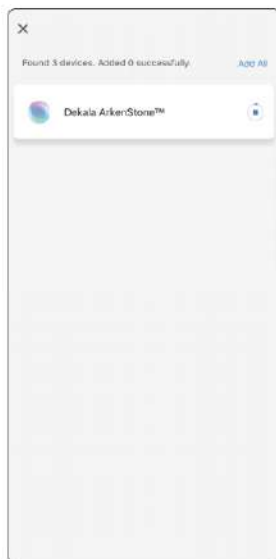

⑥ You can re-name the device after it successfully connects to your 2.4 GHz Wi-Fi, click on **"Done"** to complete the Wi-Fi setup process. When "📶" stays solid and high-lighted, it means that the device is currently connected to Smart Life App and your Wi-Fi.





## App setting page

### 1. ArkenStone™ home page

Time-Display

Alarm 1 switch/setting

Alarm 2 switch/setting

Sleep-aid setting



Night light setting

Color light setting

Ambilight setting

## 2. Time setting

Device automatically calibrates with real time after successful Wi-Fi connection, you can also manually calibrate the time and switch between duodecimal hour system (12-hour clock) and military time (24-hour clock) on the App.

Tap the time display section to enter device setting page, it allows you to customize your desired screen display with all the detailed settings;

\* The device automatically saves the settings.



The left screenshot shows the main time display with a large circular clock face showing 10:06 AM. Below the clock are several settings cards: Alarm 1 (16:11, Wake-up / Snooze), Alarm 2 (17:52, Snooze / Snooze), Sleep Aid (9 Minutes, Snooze / Snooze), Night Light, Color Light, and Ambilight. The right screenshot shows the 'Time' settings page with options for 24 Hour, Network Time, Time Hide, LCD Brightness, and Night Mode. Below these are digital clock displays for AM and PM.

① Deactivate the "Network Time" to manually adjust the time;

② Deactivate the "24 Hour" to show 12-hour clock system, activate the "24 Hour" to show 24-hour clock system.

Activate/Deactivate to hide/Unhide Time-Display when the device's light is on.

Set the daily duration for "Night Mode"

### 3. Alarm clock setting

**Attention:** The two sets of alarm clocks are set within the same process, and the alarm clock button(🔔) in the back of the device is able to deactivate both alarm yet can only activate "Alarm 1"

#### Take Alarm clock 1 as a demonstration


- ① You are able to activate/deactivate both alarms clocks(**Alarm clock 1** and **Alarm clock 2**) from the ArkenStone™ home page;
- ② Tap **"Alarm 1"** section to enter **"Alarm 1"** setting page, the device will auto-save all your customized settings.
- ③ During the alarm beeping: Click **"Stop"** on the ArkenStone™ home page to completely turn off the alarm; click **"Snooze"** to turn on snooze mode(stops beeping for 9 minutes to give you a short nap).

\* You can gently tip over or set the device upright to repeatedly turn on snooze mode.



#### 4. Sleep-aid setting

- ① You are able to activate/deactivate "Sleep-aid" mode from the ArkenStone™ home page;
- ② Tap "Sleep-aid" section to enter the "Sleep-aid" setting page, the device will auto-save all your customized settings.

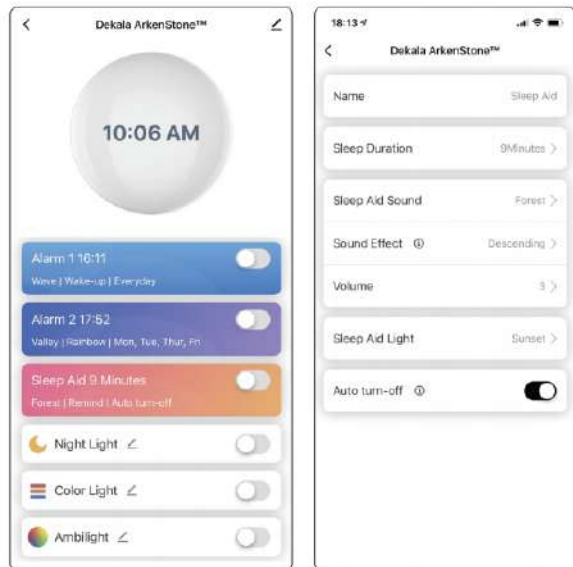

## 5. Night Light setting

- ① You are able to turn on/off **Night Light** from the **ArkenStone™** home page;
- ② Tap "**Night Light**" section to enter "**Night Light**" page, adjust the brightness level.



## 6. Color Light setting

- ① You are able to turn on/off **Color Light** from ArkenStone™ home page;
- ② Tap "**Color Light**" section to enter the "**Color Light**" customizing page, you can customize your favourite color from the 16-million color board. The device will auto-save all your customized settings.




## 7. Ambilight setting

- ① You are able to turn on/off **Ambilight** from ArkenStone™ home page;
- ② Tap "**Ambilight**" section to enter the "**Ambilight**" selecting page, you can re-name "**Ambilight**" to your liking, such as "Michael" or "Lily" (for voice command purposes) .
- ③ Long-press the following Sub-Ambilight modes for more detailed setting.



## 8. Other setting

Click "⌵" in the upper right corner to enter, on this screen you can view device information, Third party control guidelines, Offline notification, remove the device and so on.

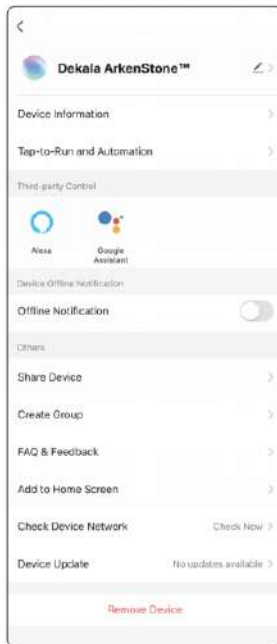






# Voice Control




## Take "Alexa" connecting setup as an example

**Attention:** Make sure device has already linked with the Smart Life App

- ① Download **"Amazon Alexa"** from Google Play / App Store and sign up (If you are already an Alexa user, you can just open it).
- ② Choose Skills&Games, search Smart Life and enable Smart Life.

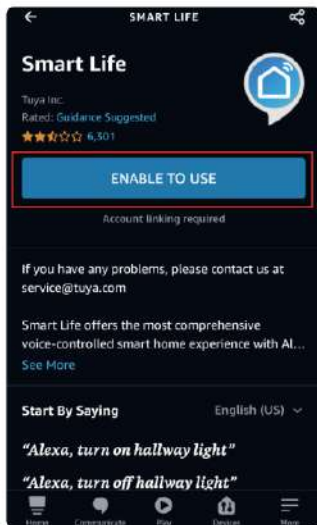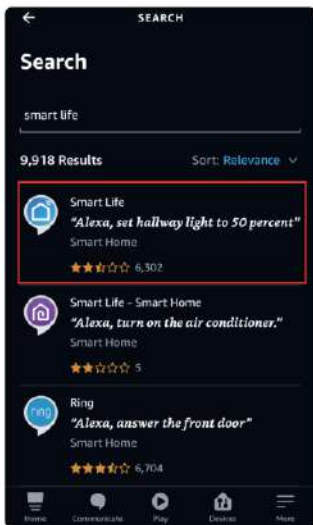
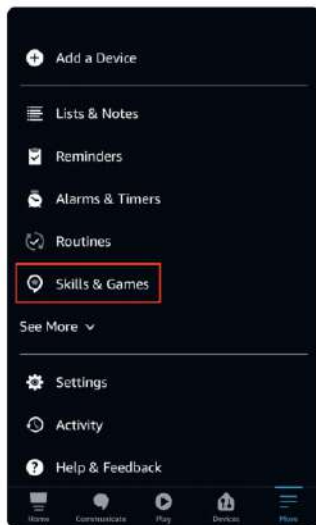


③ "Launch" and log in to Alexa Smart Life with the same username and password you have for Smart Life App and tap "Agree and link" . You are able to voice control the device with Amazon Echo (Alexa) after seeing "Your Smart Life account has been succesfully linked."

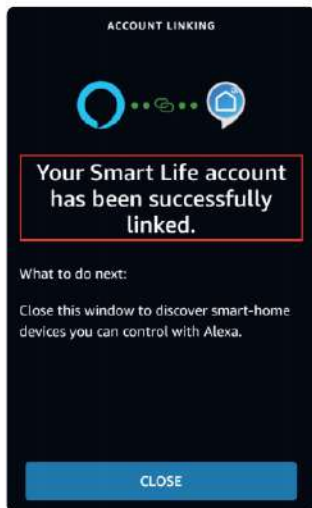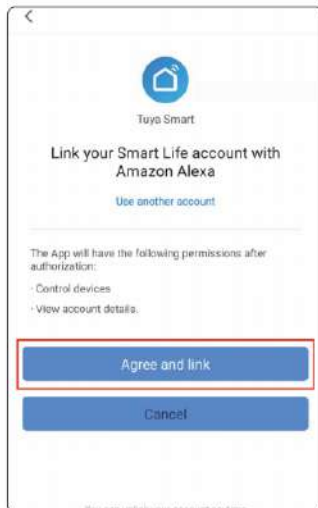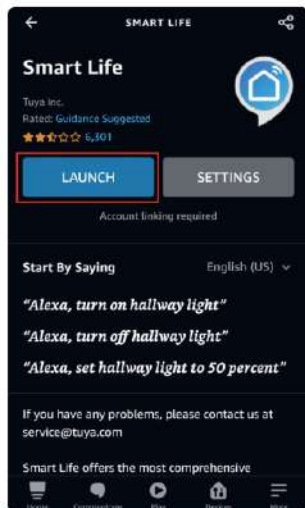

- ④ Open Smart Life App to check if the third-party control has linked, if it shows yes, it means the two accounts has linked up on cloud. You can rename the device with Smart Life App and Alexa will automatically synchronize the new name via cloud.

**Attention:** You can also have Alexa discover new devices and repeat the linking process to re-link with the re-named device via Smart Life App.(only an optional operation)

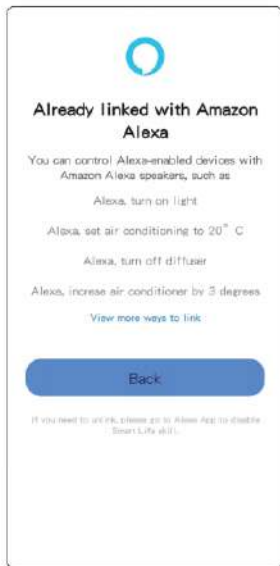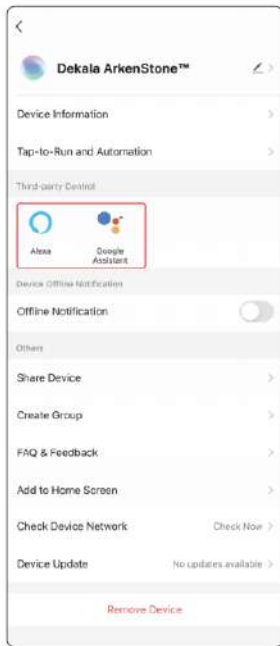

## Voice control

You can re-name all the functions of device, Alexa will sync with the new names and recognize them as voice commands.

Works with Alexa / Google smart home.

**Attention:** Minor delay might occur due to various Wi-Fi speed and cloud processing system, when device or Alexa fail to react to voice control, please wait for a few minutes and try again.

Here are some commands to try

"Alexa, Turn on/off the Night Light"

"Alexa, Set Night Light to 20%"

"Alexa, Turn on/off the Color Light"

"Alexa, Change Color Light to red"

"Alexa, Turn on/off the Alarm"


"Alexa, Turn on/off the Sleep-aid"

# Usage


## Set the functions

### 1. Manual time-setting


① Plug in to power, long-press  to enter manual time-setting;




② Rotate  to select the correct hour, press  to apply and continue;



③ Rotate  to select the correct minute, press  to apply and continue;



④ Rotate  to select the desired Time-Display system (12H or 24H), press  to confirm and complete time-setting;



**Attention:** During the connecting process, if there is no action within 15 seconds, device would resume to its home screen.

## 2. Time-Display visibility control

Press  to select the visibility(Off, 10%,40%,70%,100%) of the Time-Display, you can do the same thing on the Smart Life App, the default visibility is at 40% of its maxium brightness.




40%



70%



100%



OFF




10%

## Alarm Clock

### 1. Turn on/off alarm

① When the device is under Time-Display page, press  to activate Alarm clock 1, the digits flashes for 3 seconds to show the preset alarm time, the alarm clock icon stays solid.



② Press  to deactivate the alarm clock, the corresponding alarm clock icon hides.




**Attention:** 1.The two sets of alarm clocks are set within the same process, and the alarm clock button(  ) in the back of the device is able to deactivate both alarm yet can only activate "Alarm 1"


2.Device can set week-day alarms and weekend alarms separately via Smart Life App.

## 2. Alarm setting


① Under Time-Display page, long-press  till alarm icon  on the screen flashes to enter alarm setting mode;




② Rotate  to select the correct hour, press  to apply and continue;



③ Rotate  to select the correct minute, press  to confirm and continue to alarm-sound selecting;




④ Rotate  to select the desired alarm-sound (S-01 to S-05), press  to apply and continue to volume level selecting;




**Attention:** During the connecting process, if there is no action within 15 seconds, device would resume to its home screen.

- ⑤ Rotate  to select the alarm-sound volume(U-01 to U-10) , press  to confirm and continue to lighting effects selecting;

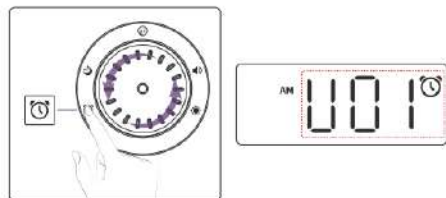


- ⑥ Rotate  to select the lighting effect(E-01 to E-11) press  to confirm and continue to brightness level selecting;

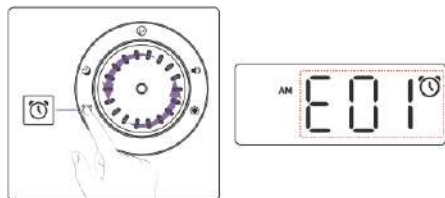


**Attention:** During the alarm, the lighting effects change accordingly to your "Ambilight" and "Color Light" customization.

- ⑦ Rotate  to select the brightness level (L-01 to L-08) press  to confirm and continue to lighting-in-advance\* setting;

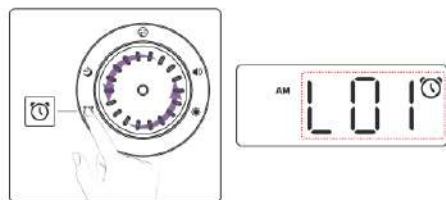

- ⑧ Rotate  to adjust the desired duration for lighting-in-advance\* (from 5 to 120 minutes) press  to confirm and complete alarm clock setting.

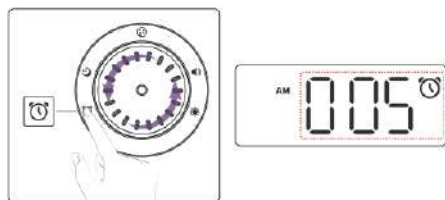

**lighting-in-advance\***: this function enables the Arkenstone to slowly light up ahead of your preset alarm-time. We want to make sure your body gently adapts to the alarm- lighting while you are still asleep, giving you a comfortable and pleasing wake-up.

**Attention:** The lighting can be turned on before the preset alarm-time, and turned off by long-press  for 3 seconds.




## Snooze


(Gives you multiple 9-minute naps before completely waking up)

### Activate/deactivate snooze mode

① During the alarm beeping, press  or  to turn on snooze mode (alarm-sound pauses for 9 minutes while both  and  on the screen keep flashing), you can turn on snooze mode repeatedly up to 5 times per each preset alarm.




② Under snooze mode (device stays silent while are both  and  on the screen keep flashing), press any of the three buttons:  /  /  to exit snooze mode and completely turn off the alarm. (won't beep again until the next preset alarm-time).




\* You can gently tip over or set upright the device to repeatedly turn on snooze mode.

\* During the alarm beeping, press any of the three buttons:  /  /  to completely stop the alarm. (no snoozing)



③ Press  to deactivate alarm completely.




**Attention:** the alarm gets automatically turned off after 30 minutes of beeping without any operation on the device.

## Sleep-aid mode


### 1. Activate/Deactivate sleep-aid mode

① When the device is under Time-Display page, press

 to activate sleep-aid mode.

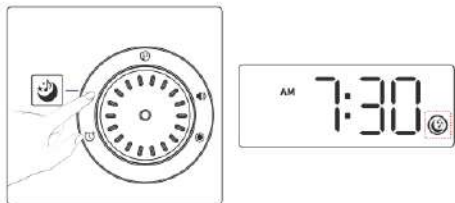


② Press  or  to deactivate sleep-aid mode as well as hide the sleep-aid icon.

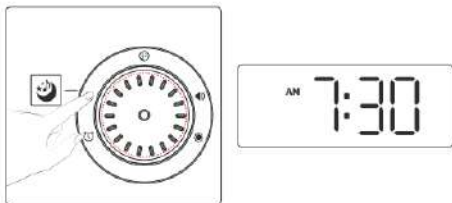


### 2. Sleep-aid setting


① When the device is under Time-Display page, long-press till  flashes to enter sleep-aid setting mode

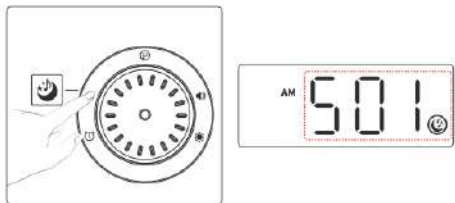

② Rotate  to select sleep-aid sound(S-01 to S-11), press  to confirm and continue to volume level selecting;

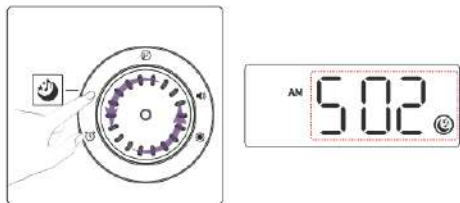


③ Rotate  to select sleep-aid sound volume (U-01 to U-10), press  to confirm and continue to sleep-aid lighting effects selecting;

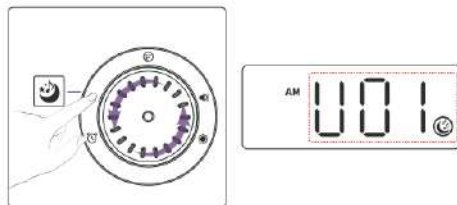


**Attention:** During the alarm, the lighting effects change accordingly to your "Ambilight" and "Color Light" customization.


④ Rotate  to select sleep-aid lighting effects (E-01 to E-10), press  to confirm and continue to brightness level selecting;

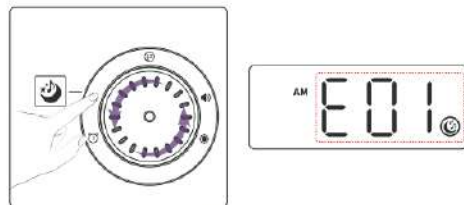

⑤ Rotate  to select brightness level (L-01 to L-08), press  to confirm and continue to sleep-aid duration setting;

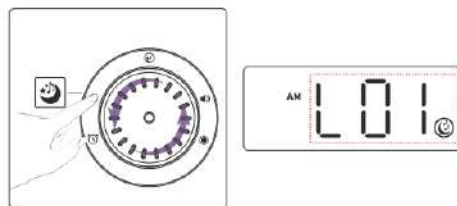


⑥ Rotate  to set sleep-aid duration (from 5 to 120 minutes), press  to confirm and complete sleep-aid setting.

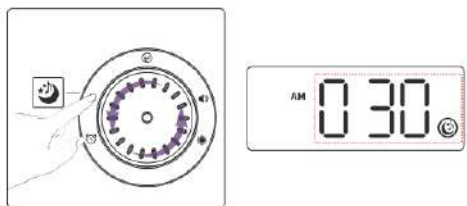

## Volume adjustment function

When the alarm or sleep-aid sound is on, press  to enter the volume adjustment, and rotate  to adjust the volume.


**Attention:** When the alarm or sleep-aid sound is on, you can rotate  to adjust the brightness.




## Color Light function

### 1. Turn on/off the Color Light

① Plug in to power, press  to turn on the Color Light;

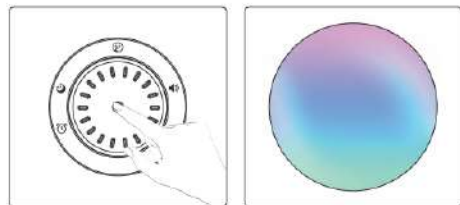


② When the Color Light is on, long-press  for 3 seconds to turn off the Color Light.

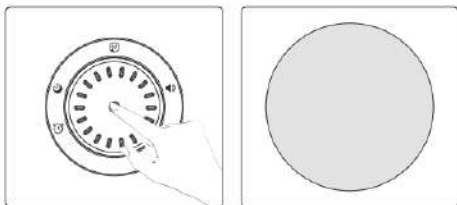


**Attention:** When the color light is on, click  to adjust the brightness of the Time-Display or turn off the Time-Display.

### 2. Brightness control

① When the light is on, rotate  clockwise to increase the brightness;

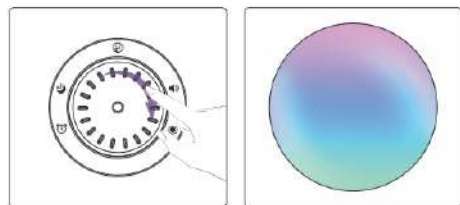


② When the light is on, rotate  counter-clockwise to decrease the brightness.

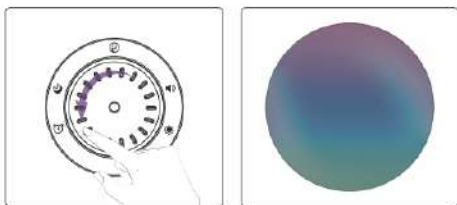




### 3.Manual lighting-effect switching diagram

\*Most colors can be customized from Smart Life App.

All customization will be automatically memorized by the device.

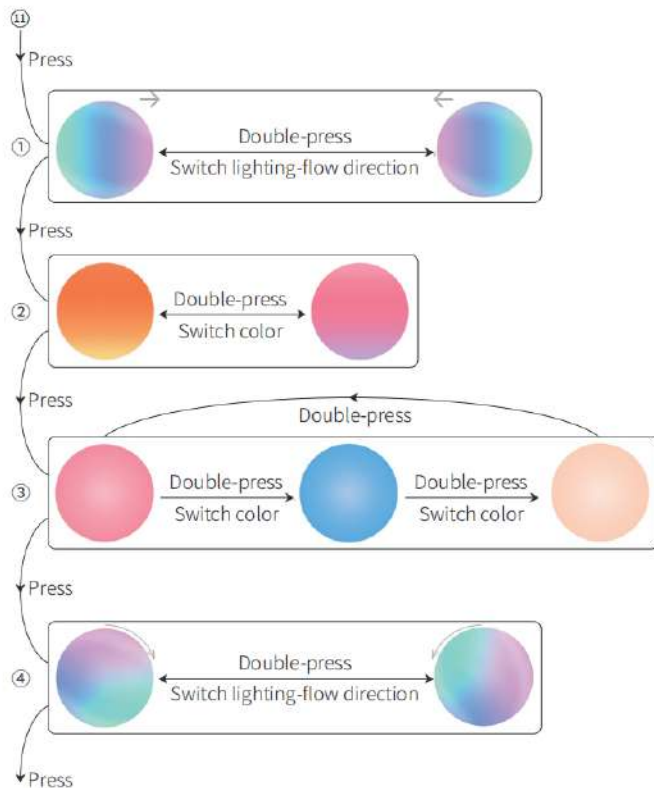

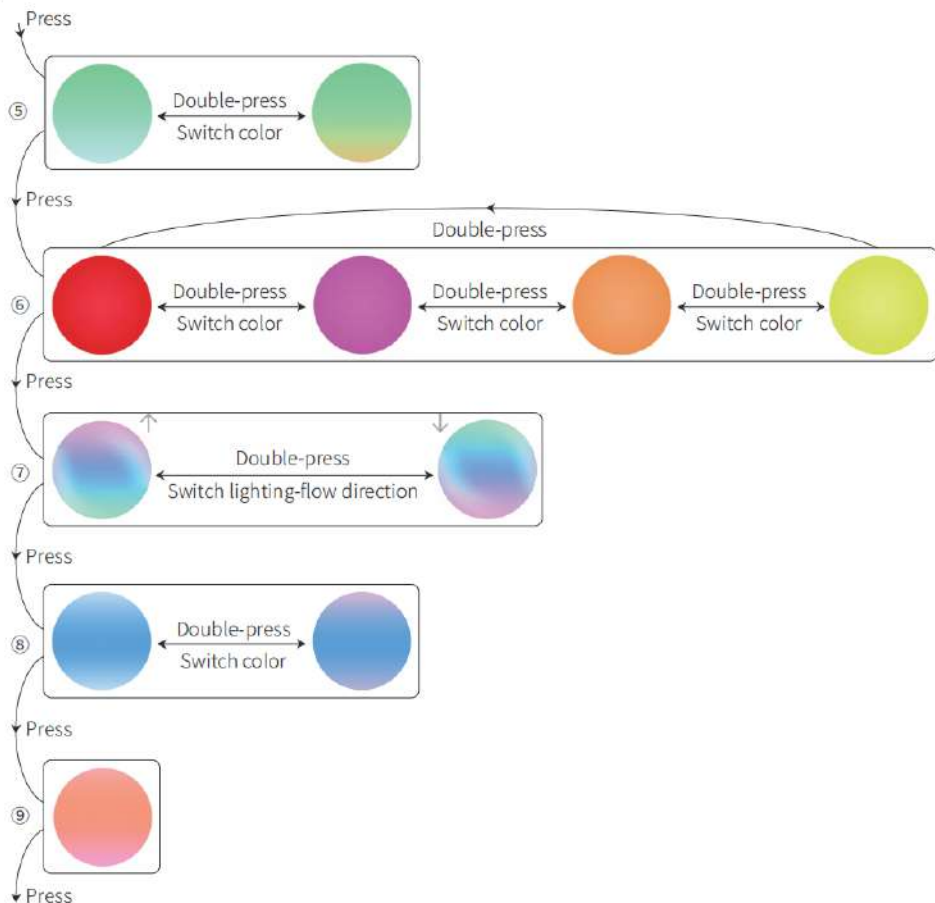

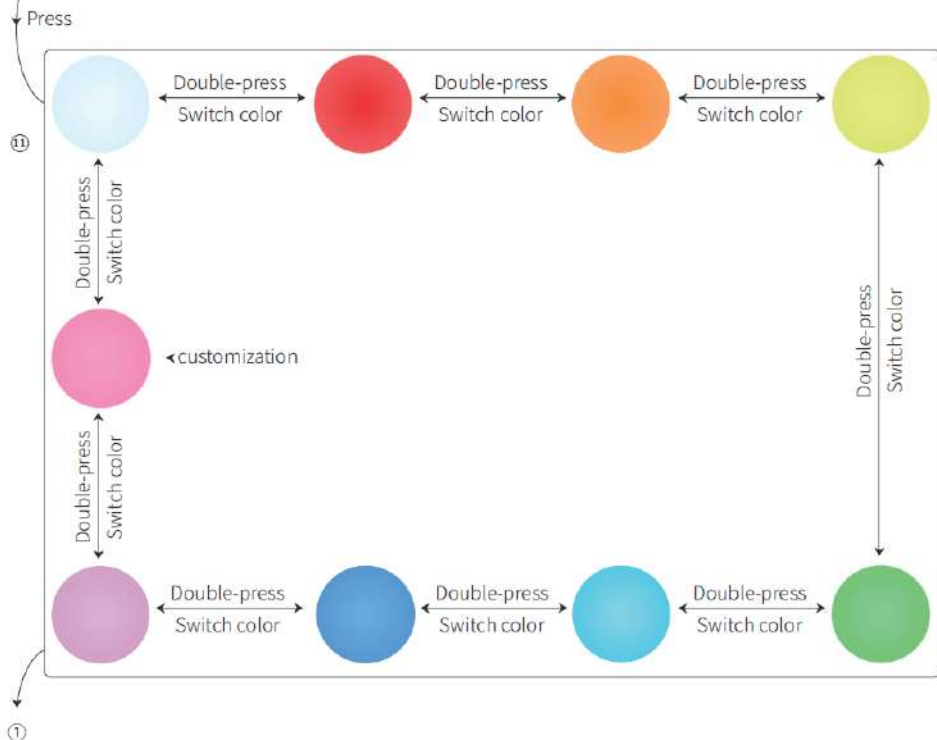

## Specification

|                    |                                                                                                                                                                                                                                                                                                                                                                                                                           |
|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model              | SWL3-S                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Material           | PC,ABS, Metal                                                                                                                                                                                                                                                                                                                                                                                                             |
| Color              | White                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Weight             | 556g                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Size               | 180x180x90.3mm                                                                                                                                                                                                                                                                                                                                                                                                            |
| Adaptor            | 5V-2A                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Input              | 100-240V                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Speaker            | 4Ω 2W                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Power              | 10W(MAX)                                                                                                                                                                                                                                                                                                                                                                                                                  |
| Communication mode | Wi-Fi 2.4GHz & Bluetooth                                                                                                                                                                                                                                                                                                                                                                                                  |
| Control mode       | Button control, APP control and Voice control                                                                                                                                                                                                                                                                                                                                                                             |
| Packing list       | ArkenStone™ X1, Use guide X1,<br>Adapter X1, Charging cable X1                                                                                                                                                                                                                                                                                                                                                            |
| Certification      |      |

## FAQ

### 1. The device cannot be connected?

- ① Please put the router, device and mobile phone in the same area (as closely as possible).
- ② Please make sure your Wi-Fi signal is strong or usable at least.(only 2.4GHz Wi-Fi network is supported)
- ③ To connect to a different smartphone or Wi-Fi network, please long-press to re-enter Wi-Fi connecting mode.



## 2. App suddenly loses control over the device?

- ① Please make sure that the device is powered on.
- ② Check the strength of the Wi-Fi signal(open a random web page as testing) and whether the device and your smartphone are connected under the same Wi-Fi(2.4GHz only)
- ③ Re-open Smart Life App and try again.

## 3. How to reset Wi-Fi connection on the device?

Long-press  till the  flashes to enter Wi-Fi connecting status(preferably turn off the light first for a clear visibility on the flashing  ).

## 4. Changes in setting on App don't sync with the device?

- ① Check the Wi-Fi connection between the device and your smartphone and the strength of Wi-Fi signal.(open a random web page as testing)
- ② Re-open Smart Life App and try again.

## 5. Smartphone loses control over the device when under separated locations(different Wi-Fi)?

- ① Check the strength of Wi-Fi signal(open a random web page as testing), and make sure the device and your smartphone are connected under the same Wi-Fi.(2.4GHz only)
- ② Re-start the router and try connecting the device and your smartphone via Smart Life App again. (under the same Wi-Fi, 2.4GHz only)

## 6. Other issues

If issues still occur under the instructions above, please go to the **ArkenStone™ home** page on Smart Life App and click  at the top right and select "FAQ & Feedback", then tap "Unresolved? Send Feedback" to submit your issue, and feel free to contact us by E-mail at [info@dekalastore.com](mailto:info@dekalastore.com), our troubleshooting team will get back to you ASAP.

## Notes

- Please wipe this product with a soft cloth.
- Do not scrub this product with abrasive cleaning agents, rough chemicals, alcohol, acetone cleaning agents, etc., so as not to damage the surface of the product.
- Store the product in a safe, dry place that will not be overstocked, bruised or damaged.
- Do not wrap the power cord around the appliance when storing the product.
- Please use the attached power adapter (5V-2A) to avoid damage to the equipment.
- Please use the product under the instructions. Disassembly and collision on the product are strictly prohibited and will void the warranty.
- Please place the product on stable, flat surface when using.
- Do not use it in high temperature, humid or corrosive environment, so as to avoid leakage caused by circuit damage.
- Although the product is family friendly, to reduce the risk of electric shock, be careful with the children in present when using the product.
- This product is not fireproof, please do not throw it into the fire, do not go near the source of fire.
- This product is not waterproof, please do not put it into the water, so as not to damage the equipment.

Feel free to contact us if you need further assistance, our troubleshooting team will get back to you ASAP.

Official Website : [www.dekalastore.com](http://www.dekalastore.com)

Email: [info@dekalastore.com](mailto:info@dekalastore.com)