




Product Data

Split System Air Conditioner 3-Phase, 208/230V 3-Phase, 460V

5TTA4036A3000A
5TTA4042A3000A
5TTA4048A3000A
5TTA4060A3000A
5TTA4036A4000A
5TTA4042A4000A
5TTA4048A4000A
5TTA4060A4000A

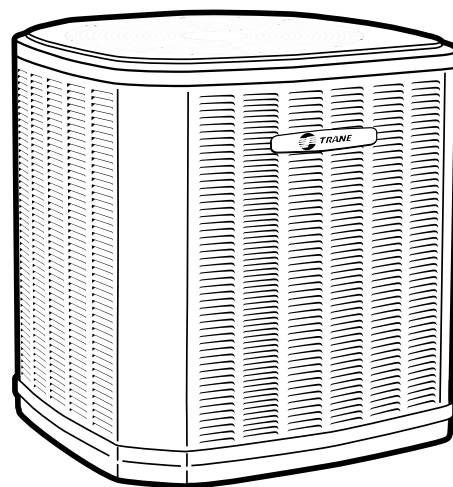

Note: "Graphics in this document are for representation only. Actual model may differ in appearance."



Product Specifications

Model No. ^(a)	5TTA4036A3000A	5TTA4042A3000A	5TTA4048A3000A	5TTA4060A3000A
POWER CONNS. - V/PH/HZ ^(b)	208/230/3/60	208/230/3/60	208/230/3/60	208/230/3/60
MIN. BRCH. CIR. AMPACITY	16.6	16.3	16.2	20.9
BR. CIR. PROT. RTG. - MAX. (AMPS)	25	25	25	35
COMPRESSOR	CLIMATUFF® - SCROLL	CLIMATUFF® - SCROLL	CLIMATUFF® - SCROLL	CLIMATUFF® - SCROLL
RL AMPS - LR AMPS	12.8 - 97.5	12.2 - 102.8	12.2 - 120.4	16.0 - 156.4
Outdoor Fan FL AMPS	0.64	1.05	0.93	0.93
Fan HP	1/8	1/5	1/5	1/5
Fan Dia (inches)	23	27.5	27.5	27.5
Coil	SPINE FIN™	SPINE FIN™	SPINE FIN™	SPINE FIN™
Refrigerant R-454B	3 LBS., 8 OZ	5 LBS., 1 OZ	6 LBS., 10 OZ	5 LBS., 15 OZ
VALVE CONNECTION SIZE - IN. O.D. GAS	3/4	7/8	7/8	7/8
VALVE CONNECTION SIZE - IN. O.D. LIQ	5/16	5/16	5/16	5/16
LINE SIZE - IN. O.D. GAS ^(c)	7/8	7/8	7/8	1-1/8
LINE SIZE - IN. O.D. LIQ.	5/16	5/16	5/16	5/16
Charge Spec. Subcooling	10°F	10°F	10°F	10°F
Dimensions H x W X D Crated (IN.)	38 x 30 x 33	42.5 x 35 x 38	50.5 x 35 x 38	50.5 x 35 x 38
Weight - Shipping (lbs.)	183	246	307	302
Weight - Net (lbs.)	156	212	257	252
Optional Accessories:				
Anti-short Cycle Timer	TAYASCT501A	TAYASCT501A	TAYASCT501A	TAYASCT501A
Evaporator Defrost Control	AY28X079	AY28X079	AY28X079	AY28X079
Rubber Isolator Kit	BAYISLT101	BAYISLT101	BAYISLT101	BAYISLT101
Extreme Condition Mount Kit	BAYECMT023	BAYECMT004	BAYECMT004	BAYECMT004
Sound Enclosure	BAYSDEN003	BAYSDEN004	BAYSDEN004	BAYSDEN004
Seacoast Kit	BAYSEAC001	BAYSEAC001	BAYSEAC001	BAYSEAC001
Low Ambient Kit	BAYLOAM103	BAYLOAM103	BAYLOAM103	BAYLOAM103
Service Valve Panel Cover	TAYSVPANL0044AA	TAYSVPANL0046AA	TAYSVPANL0046AA	TAYSVPANL0046AA
Refrigerant Lineset ^(d)				

^(a) Certified in accordance with the Unitary Air-conditioner equipment certification program which is based on AHRI standard 210/240.

^(b) Calculated in accordance with N.E.C. Only use HACR circuit breakers or fuses.

^(c) For standard, recommended linear length and lift applications, see the Subcool Charging Chart in IOM. For greater lengths and other applications, consult refrigerant piping software Pub. No. 32-3312-xx (xx denotes latest revision).

^(d) 25, 30, 35 and 50 foot linesets available. For a complete listing of lineset options available from equipment or supply stores, refer to the Trane Residential and Light Commercial Product Handbook.

Product Specifications

Model No. ^(a)	5TTA4036A4000A	5TTA4042A4000A	5TTA4048A4000A	5TTA4060A4000A
POWER CONNS. - V/PH/HZ ^(b)	460/3/60	460/3/60	460/3/60	460/3/60
MIN. BRCH. CIR. AMPACITY	6.8	7.9	8.6	10.2
BR. CIR. PROT. RTG. - MAX. (AMPS)	15	15	15	15
COMPRESSOR	CLIMATUFF®- SCROLL	CLIMATUFF®- SCROLL	CLIMATUFF®- SCROLL	CLIMATUFF®- SCROLL
RL AMPS - LR AMPS	5.1 - 44.3	5.8 - 50.0	6.4 - 50.0	7.7 - 69.0
Outdoor Fan FL AMPS	0.38	0.6	0.6	0.6
Fan HP	1/8	1/5	1/5	1/5
Fan Dia (inches)	23.0	27.5	27.5	27.5
Coil	SPINE FIN™	SPINE FIN™	SPINE FIN™	SPINE FIN™
Refrigerant R-454B	3 LBS., 8 OZ	5 LBS., 1 OZ	6 LBS., 10 OZ	5 LBS., 15 OZ
VALVE CONNECTION SIZE - IN. O.D. GAS	3/4	7/8	7/8	7/8
VALVE CONNECTION SIZE - IN. O.D. LIQ	5/16	5/16	5/16	5/16
LINE SIZE - IN. O.D. GAS ^(c)	7/8	7/8	7/8	1-1/8
LINE SIZE - IN. O.D. LIQ.	5/16	5/16	5/16	5/16
Charge Spec. Subcooling	10°F	10°F	10°F	10°F
Dimensions H x W x D Crated (IN.)	38 x 30 x 33	42.5 x 35 x 38	50.5 x 35 x 38	50.5 x 35 x 38
Weight - Shipping (lbs.)	183	246	307	302
Weight - Net (lbs.)	156	212	257	252
Optional Accessories:				
Anti-short Cycle Timer	TAYASCT501A	TAYASCT501A	TAYASCT501A	TAYASCT501A
Evaporator Defrost Control	AY28X079	AY28X079	AY28X079	AY28X079
Rubber Isolator Kit	BAYISLT101	BAYISLT101	BAYISLT101	BAYISLT101
Extreme Condition Mount Kit	BAYECMT023	BAYECMT004	BAYECMT004	BAYECMT004
Sound Enclosure	BAYSDEN003	BAYSDEN004	BAYSDEN004	BAYSDEN004
Seacoast Kit	BAYSEAC001	BAYSEAC001	BAYSEAC001	BAYSEAC001
Low Ambient Kit	BAYLOAM103	BAYLOAM103	BAYLOAM103	BAYLOAM103
Service Valve Panel Cover	TAYSVPANL0044AA	TAYSVPANL0046AA	TAYSVPANL0046AA	TAYSVPANL0046AA
Refrigerant Lineset ^(d)				

^(a) Certified in accordance with the Unitary Air-conditioner equipment certification program which is based on AHRI standard 210/240.

^(b) Calculated in accordance with N.E.C. Only use HACR circuit breakers or fuses.

^(c) For standard, recommended linear length and lift applications, see the Subcool Charging Chart in IOM. For greater lengths and other applications, consult refrigerant piping software Pub. No. 32-3312-xx (xx denotes latest revision).

^(d) 25, 30, 35 and 50 foot linesets available. For a complete listing of lineset options available from equipment or supply stores, refer to the Trane Residential and Light Commercial Product Handbook.



Sound Power Level

MODEL	A-Weighted Sound Power Level [dB(A)]	Full Octave Sound Power(dB)							
		63 Hz*	125 Hz	250 Hz	500 Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
5TTA4036A	73	79	69	67	70	70	64	59	53
5TTA4042A	74	72	72	71	69	70	62	57	52
5TTA4048A	71	81	75	71	70	68	63	58	53
5TTA4060A	72	81	75	71	70	68	63	58	53

Note: Rated in accordance with AHRI Standard 270-2008 *For Reference Only.



Accessory Description and Usage

Anti-Short Cycle Timer — Solid state timing device that prevents compressor recycling until five (5) minutes have elapsed after satisfying call or power interruptions. Use in area with questionable power delivery, commercial applications, long lineset, etc.

Evaporation Defrost Control — SPST Temperature actuated switch that cycles the condenser off as indoor coil reaches freeze-up conditions. Used for low ambient cooling to 30°F with TXV.

Rubber Isolators — Five (5) large rubber donuts to isolate condensing unit from transmitting energy into mounting frame or pad. Use on any application where sound transmission needs to be minimized.

Extreme Condition Mount Kit — Bracket kits to securely mount condensing unit to a frame or pad without removing any panels. Use in areas with high winds, or on commercial roof tops, etc.


AHRI Standard Capacity Rating Conditions

AHRI Standard 210/240 Rating Conditions

1. Cooling 80°F DB, 67°F WB air entering indoor coil, 95°F DB air entering outdoor coil.
2. High Temperature Heating 47°F DB, 43°F WB air entering outdoor coil, 70°F DB air entering indoor coil.
3. Low Temperature Heating 17°F DB air entering outdoor coil.
4. Rated indoor airflow for heating is the same as for cooling.

AHRI Standard 270 Rating Conditions — (Noise rating numbers are determined with the unit in cooling operations.) Standard Noise Rating number is at 95°F outdoor air.


Model Nomenclature

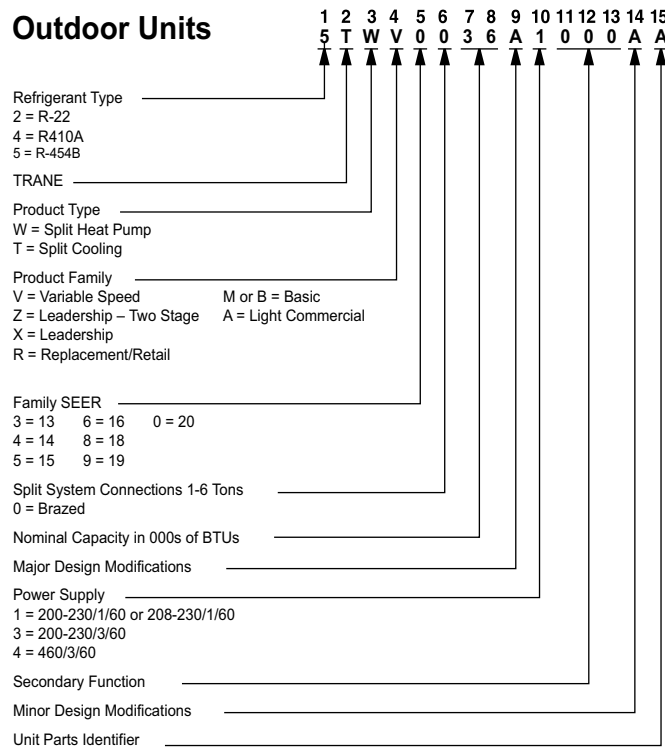



Wiring Diagram

Figure 1. 036A3 - 060A3 Models

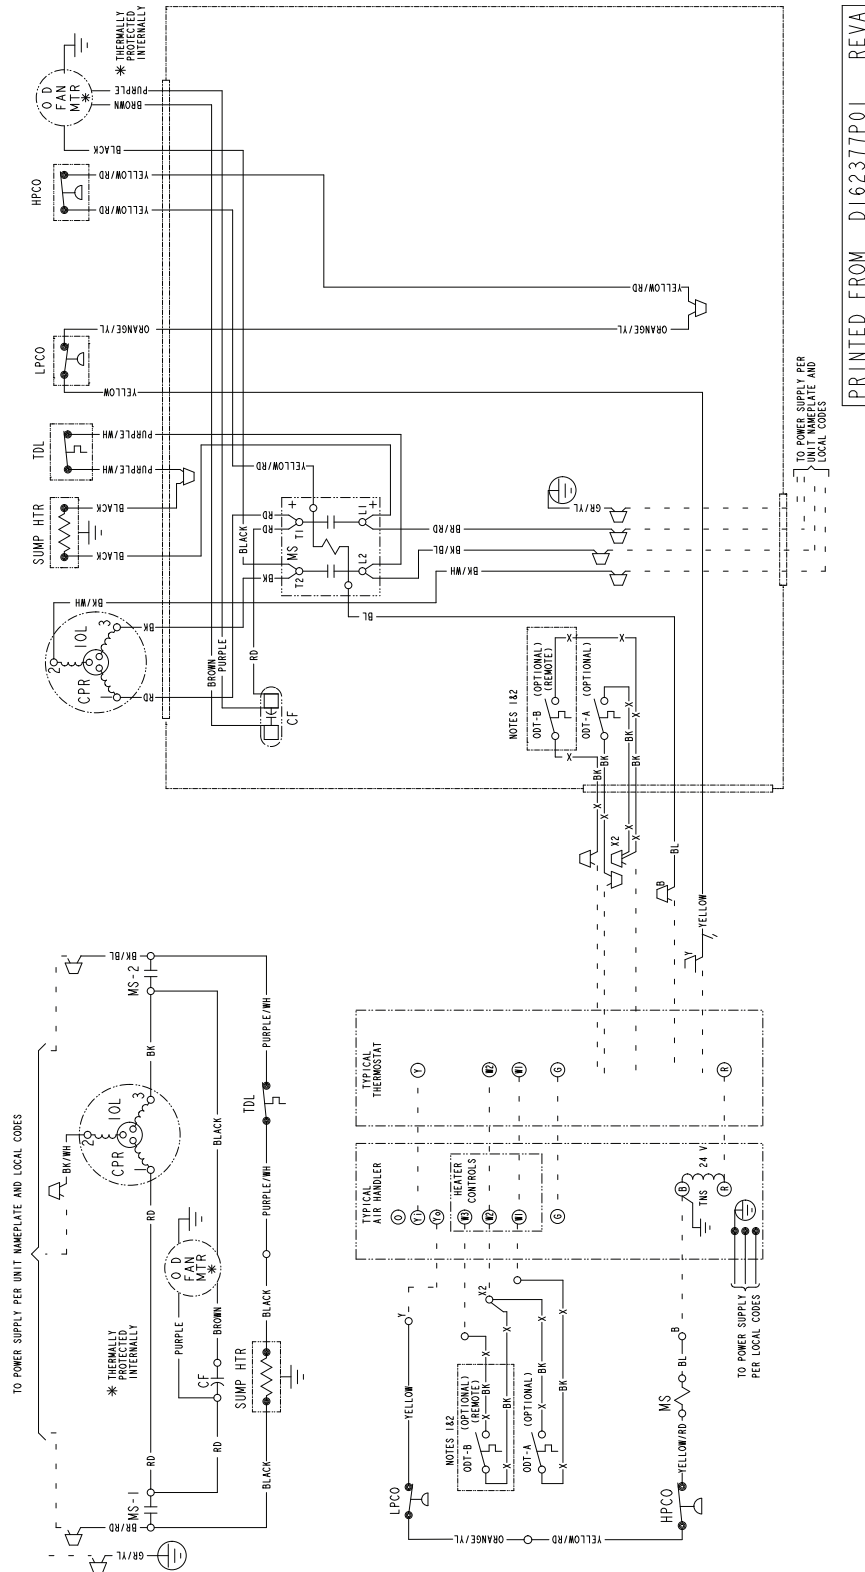

PRINTED FROM DI62377P01 REVA

[illegible]



Wiring Diagram

Figure 3. Legend and Warning

NOTES:

1. IF ODT-B IS NOT USED, ADD JUMPER BETWEEN W2 & W3 AT AIR HANDLER.
IF USED, ODT-B MUST BE MOUNTED REMOTE OF CONTROL BOX IN AN APPROVED WEATHER PROOF ENCLOSURE.
2. IF ODT-A IS NOT USED, ADD JUMPER BETWEEN W1 & W2 AT AIR HANDLER.
3. LOW VOLTAGE (24 V.) FIELD WIRING MUST BE 18 AWG MIN.



NOTE:

MATERIAL: WHITE POLYPROPYLENE SUITABLE FOR USE IN OUTDOOR ENVIRONMENT.
ADHESIVE: PRESSURE SENSITIVE ADHESIVE WITH RELEASE PAPER SUITABLE FOR
OUTDOOR APPLICATION ON PAINTED OR GALVANIZED SHEET METAL SURFACES.
SIZE : 8 1/2" X 11"

LEGEND-EQUIPMENT DIAGRAM

	24 V.	}	FACTORY WIRING
	LINE V.		
	24 V.	}	FIELD WIRING
	LINE V.		

	GROUND
	JUNCTION
	WIRE NUT OR CONNECTOR
	COIL
	CAPACITOR
	RELAY CONTACT (N.O.)
	RELAY CONTACT (N.C.)
	THERMISTOR
	INTERNAL OVERLOAD PROTECTOR
	PRESSURE ACTUATED SWITCH
	TEMP. ACTUATED SWITCH
	POL. PLUG FEMALE HOUSING (MALE TERM.)
	POL. PLUG MALE HOUSING (FEMALE TERM.)
	RESISTOR OR HEATING ELEMENT

COLOR OF WIRE			
BK/BL	BLACK WIRE WITH BLUE MARKER		
	COLOR OF MARKER		
BK	BLACK	OR	ORANGE
YL			YELLOW
BL	BLUE	RD	RED
GR			GREEN
BR	BROWN	WH	WHITE
PR			PURPLE
CA	COOLING ANTICIPATOR		
CBS	COIL BOTTOM SENSOR		
CF	FAN CAPACITOR		
CN	WIRE CONNECTOR		
CPR	COMPRESSOR		
CR	RUN CAPACITOR		
CS	STARTING CAPACITOR		
CSR	CAPACITOR SWITCHING RELAY		
DFC	DEFROST CONTROL		
F	INDOOR FAN RELAY		
HA	HEATING ANTICIPATOR		
HPCO	HIGH PRESSURE CUTOFF SW.		
IOL	INTERNAL OVERLOAD PROTECTOR		
LPCO	LOW PRESSURE CUTOFF SW.		
MS	COMPRESSOR MOTOR CONTACTOR		
ODA	OUTDOOR ANTICIPATOR		
OFT	OUTDOOR FAN THERMOSTAT		
ODS	OUTDOOR TEMPERATURE SENSOR		
ODT	OUTDOOR THERMOSTAT		
RHS	RESISTANCE HEAT SWITCH		
SC	SWITCHOVER VALVE SOLENOID		
SHR	SUMP HEAT RELAY		
SM	SYSTEM "ON-OFF" SWITCH		
TDL	DISCHARGE LINE THERMOSTAT		
TNS	TRANSFORMER		
TS	HEATING-COOLING THERMOSTAT		
TSH	HEATING THERMOSTAT		
	MOTOR WINDING		
	TERMINAL		

COOLING PERFORMANCE CAN BE CHECKED WHEN THE OUTDOOR TEMP IS ABOVE 65 DEG F.

1. TO CHECK COOLING PERFORMANCE, SELECT AND VERIFY THE PROPER INDOOR CFM.
2. ALLOW SYSTEM TO RUN UNTIL PRESSURES ARE STABILIZED.
3. MEASURE INDOOR WET BULB TEMPERATURE, OUTDOOR TEMPERATURE, SUCTION AND LIQUID PRESSURES.
4. ON THE TABLE, LOCATE OUTDOOR TEMPERATURE AND INDOOR WET BULB TEMPERATURE.
5. FIND THE INTERSECTION WITH THE COLUMN THAT CONTAINS THE OUTDOOR SIZE.
6. TARGET PRESSURES ARE LOCATED AT THE INTERSECTION BETWEEN OUTDOOR SIZE AND OPERATING TEMPERATURES.

ACTUAL:
LIQUID PRESSURE SHOULD BE +/-10 PSI OF TABLE
SUCTION PRESSURE SHOULD BE +/-3 PSI OF TABLE


FOR CANADIAN INSTALLATIONS POUR INSTALLATIONS CANADIENNES

**CAUTION: NOT SUITABLE FOR USE ON
SYSTEMS EXCEEDING 150V - TO - GROUND
ATTENTION: NE CONVIENT PAS AUX
INSTALLATIONS DE PLLS DE 150 V A
LA TERRE**

NOTE

THREE PHASE MOTOR (S) FACTORY
SUPPLIED IN THIS EQUIPMENT
PROTECTED UNDER PRIMARY
SINGLE-PHASE CONDITIONS.

Outline Drawing

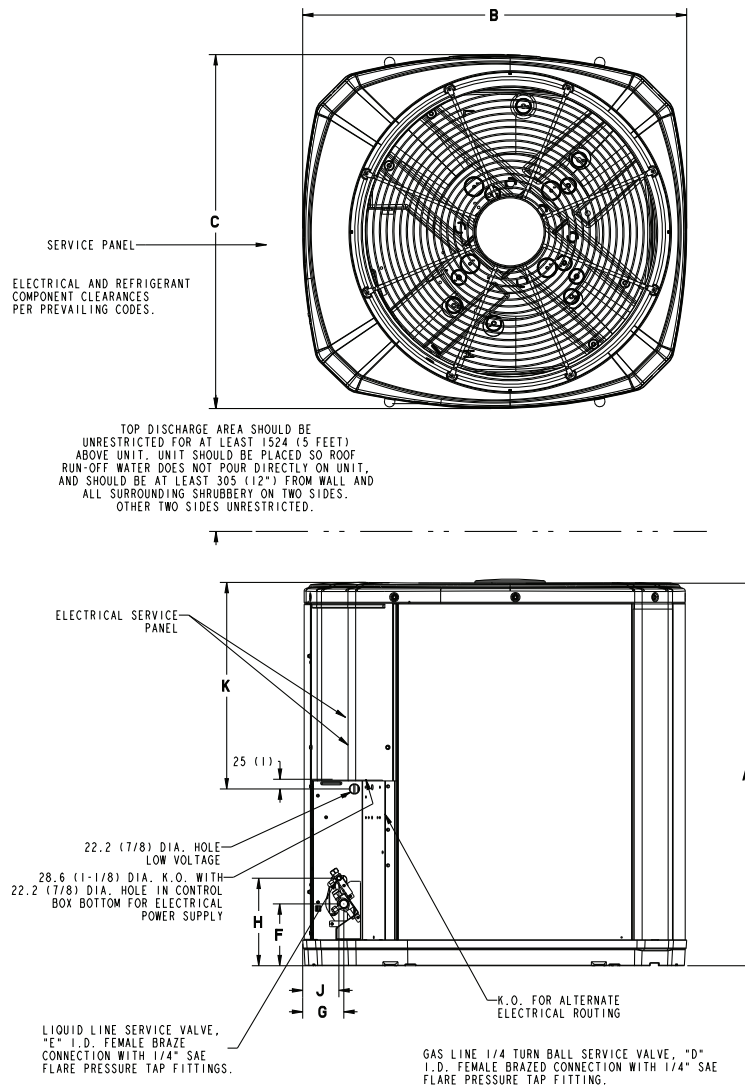

Model	Base	A	B	C	D	E	F	G	H	J	K
5TTA4036A	3	832 (32-3/4)	829 (32-5/8)	756 (29-3/4)	3/4	5/16	127 (5)	76 (3)	197 (7-3/4)	60 (2-3/8)	508 (20)
5TTA4042A	4	943 (37-1/8)	946 (37-1/4)	870 (34-1/4)	7/8	5/16	143 (5-5/8)	98 (3-7/8)	219 (8-5/8)	86 (3-3/8)	508 (20)
5TTA4048A	4	1147 (45-1/8)	946 (37-1/4)	870 (34-1/4)	7/8	5/16	152 (6)	98 (3-7/8)	219 (8-5/8)	86 (3-3/8)	813 (32)
5TTA4060A	4	1147 (45-1/8)	946 (37-1/4)	870 (34-1/4)	7/8	5/16	152 (6)	98 (3-7/8)	219 (8-5/8)	86 (3-3/8)	813 (32)



Mechanical Specification Options

General

The outdoor condensing units are factory charged with the system charge required for the outdoor condensing unit, ten (10) feet of tested connecting line, and the smallest rated indoor evaporative coil match. This unit is designed to operate at outdoor ambient temperatures as high as 115°F. Cooling capacities are matched with a wide selection of air handlers and furnace coils that are AHRI certified. The unit is certified to UL 60335-2-40. Exterior is designed for outdoor application.

Casing

Unit casing is constructed of heavy gauge, galvanized steel and painted with a weather-resistant powder paint finish. The corner panels are prepainted. All panels are subjected to our 1,000 hour salt spray test.

Refrigerant Controls

Refrigeration system controls include condenser fan, compressor contactor and low and high pressure switches. A factory supplied, field installed liquid line drier is standard.

Compressor

The compressor features internal over temperature and pressure protection. Other features include: Centrifugal oil pump and low vibration and noise.

Condenser Coil

The outdoor coil provides low airflow resistance and efficient heat transfer. The coil is protected on all four sides by louvered panels.

Low Ambient Cooling

As manufactured, this system has a cooling capacity to 55°F. The addition of an evaporator defrost control permits operation to 40°F. The addition of an evaporator defrost control with TXV permits low ambient cooling to 30°F.

The addition of the BAYLOAM107A low ambient kit permits ambient cooling to 20°F.

Thermostats – Cooling only and heat/cooling (manual and automatic change over). Sub-base to match thermostat and locking thermostat cover.



Trane - by Trane Technologies (NYSE: TT), a global innovator - creates comfortable, energy efficient indoor environments for commercial and residential applications. For more information, please visit trane.com or tranetechnologies.com.



The AHRI Certified mark indicates Trane U.S. Inc. participation in the AHRI Certification program. For verification of individual certified products, go to ahridirectory.org.

Trane has a policy of continuous data improvement and it reserves the right to change design and specifications without notice. We are committed to using environmentally conscious print practices.