


# QUICK START GUIDE TIMEBAR

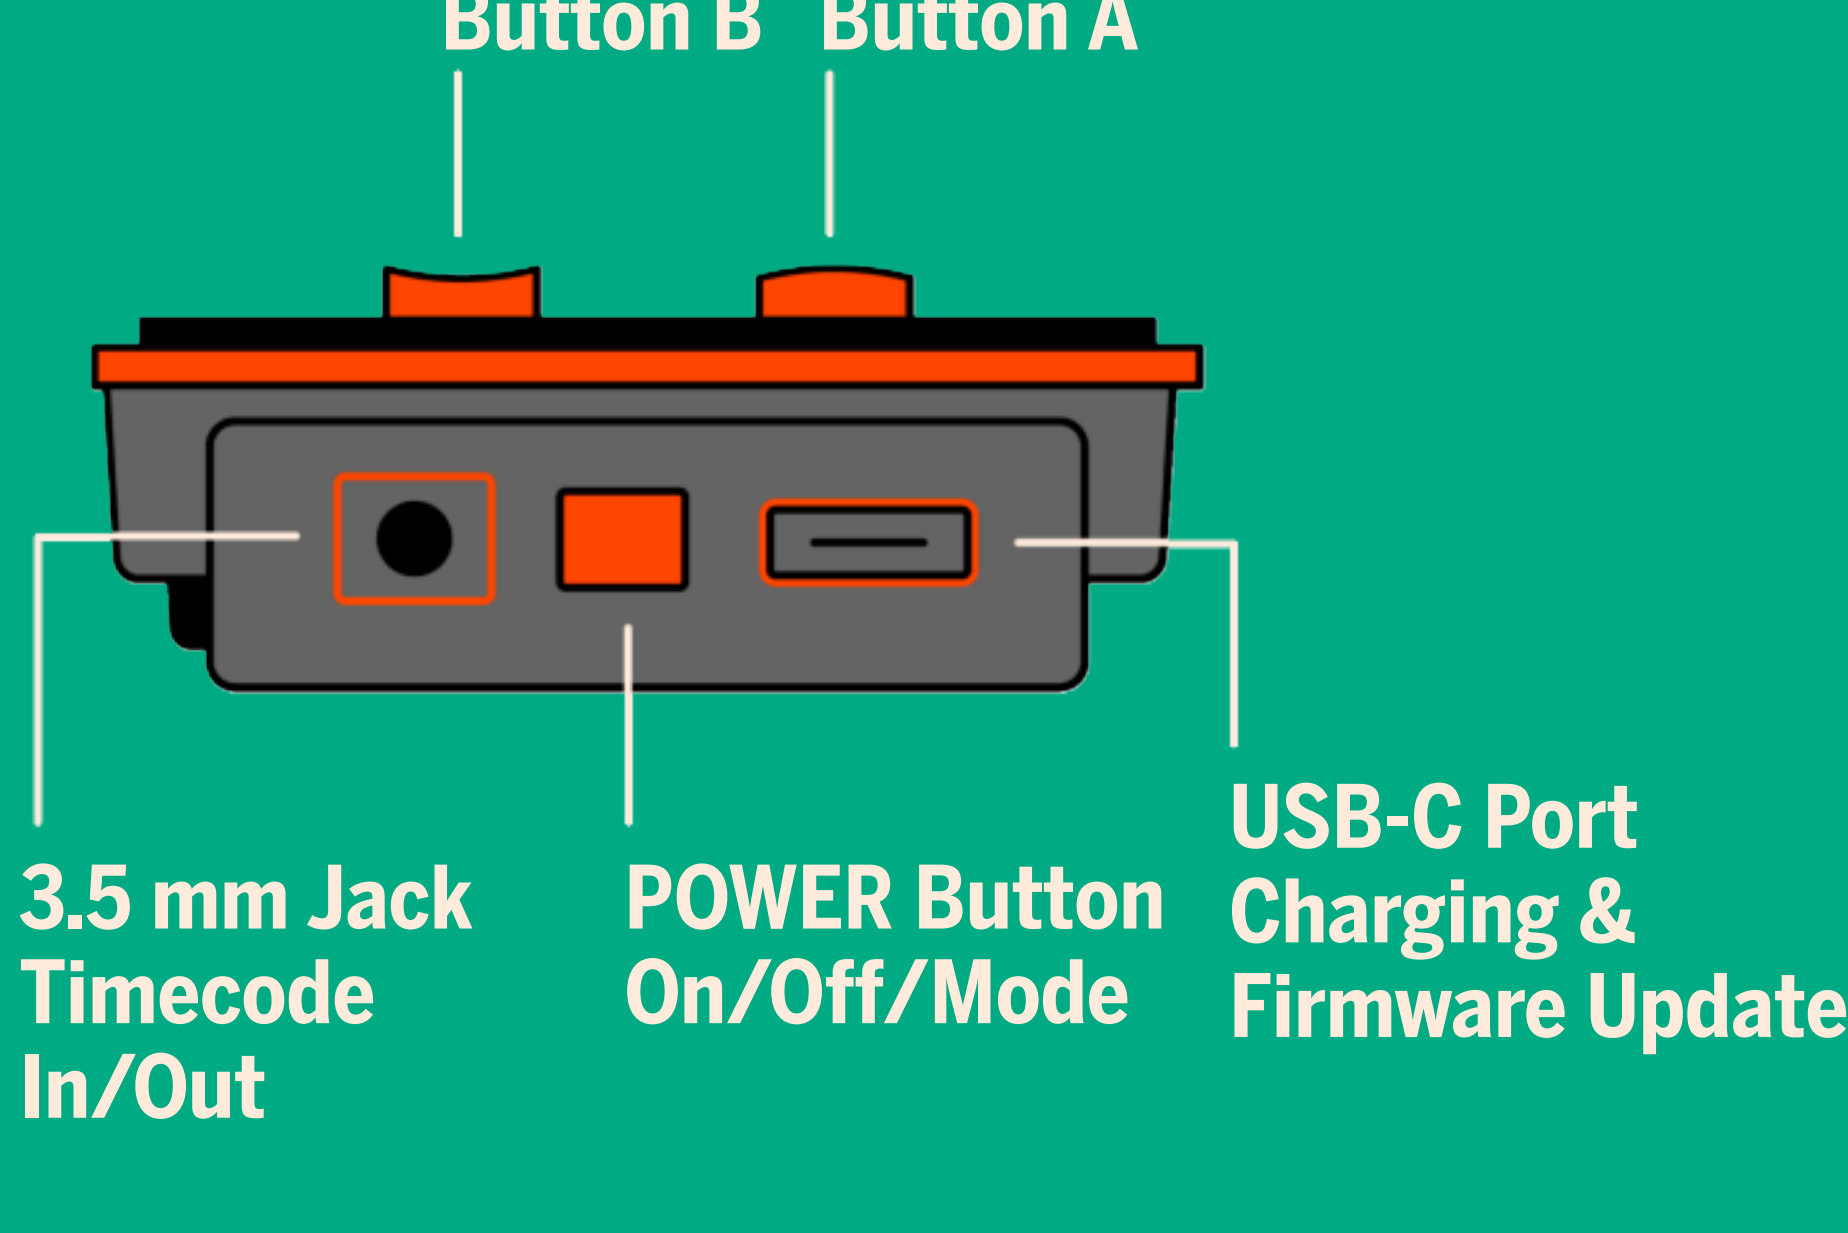

## POWER ON

### Short press POWER:

Timebar starts up waiting to be synchronized by app or external timecode

### Long press POWER:

Timebar starts up generating timecode with Time of Day (RTC)

## POWER OFF

### Long press POWER:

Timebar turns off

## MODE

**Press POWER:** Enter Mode Selection

**Press A or B:** Browse Modes

**Press POWER:** Select Mode

## TIMECODE

**A:** Show User Bits for 5 Seconds

**B:** Hold Timecode for 5 Seconds

## TIMER

**A:** Select one of 3 Timer Presets

**B:** Start/Stop

## STOPWATCH

**A:** Reset Stopwatch

**B:** Start/Stop

## MESSAGE


**A:** Select one of 3 Message Presets

**B:** Start/Stop

## SLATE

**A:** N/A

**B:** N/A

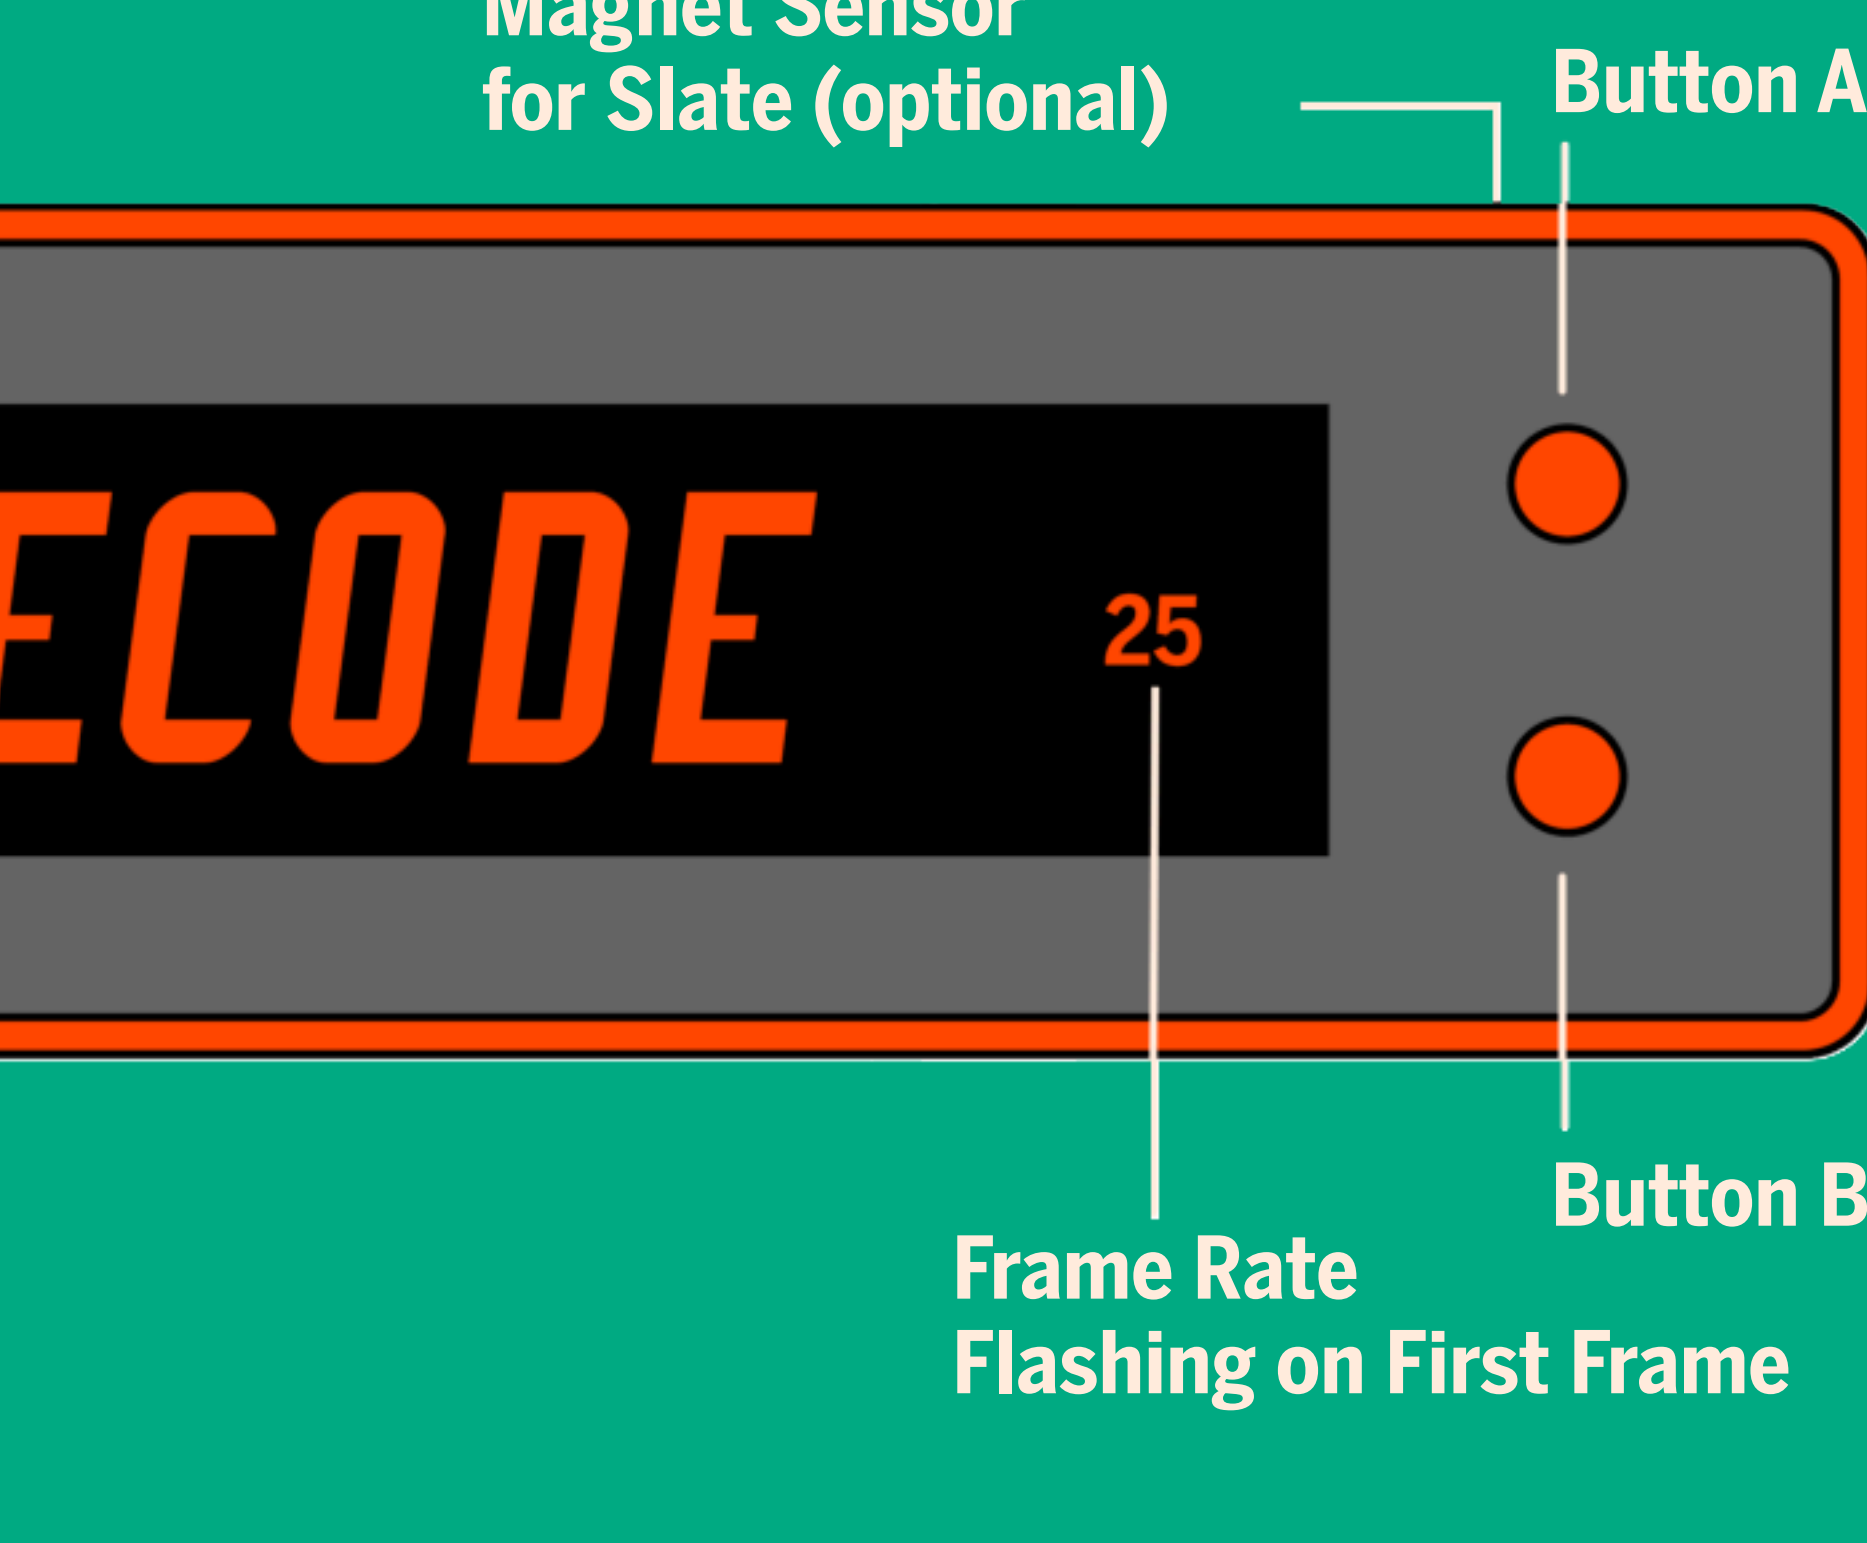

## BRIGHTNESS

### Press A & B at once:

Enter Brightness Selection

### Press A or B:

Select Brightness Level from 1 to 31

A = Auto Brightness


## BRIGHTNESS BOOST

### Press A & B twice:

Brightness Boost for 30 Seconds

## FRAME RATE

All SMPTE 12-M Standard frame rates. While in Timecode Mode the selected frame rate flashes on first frame

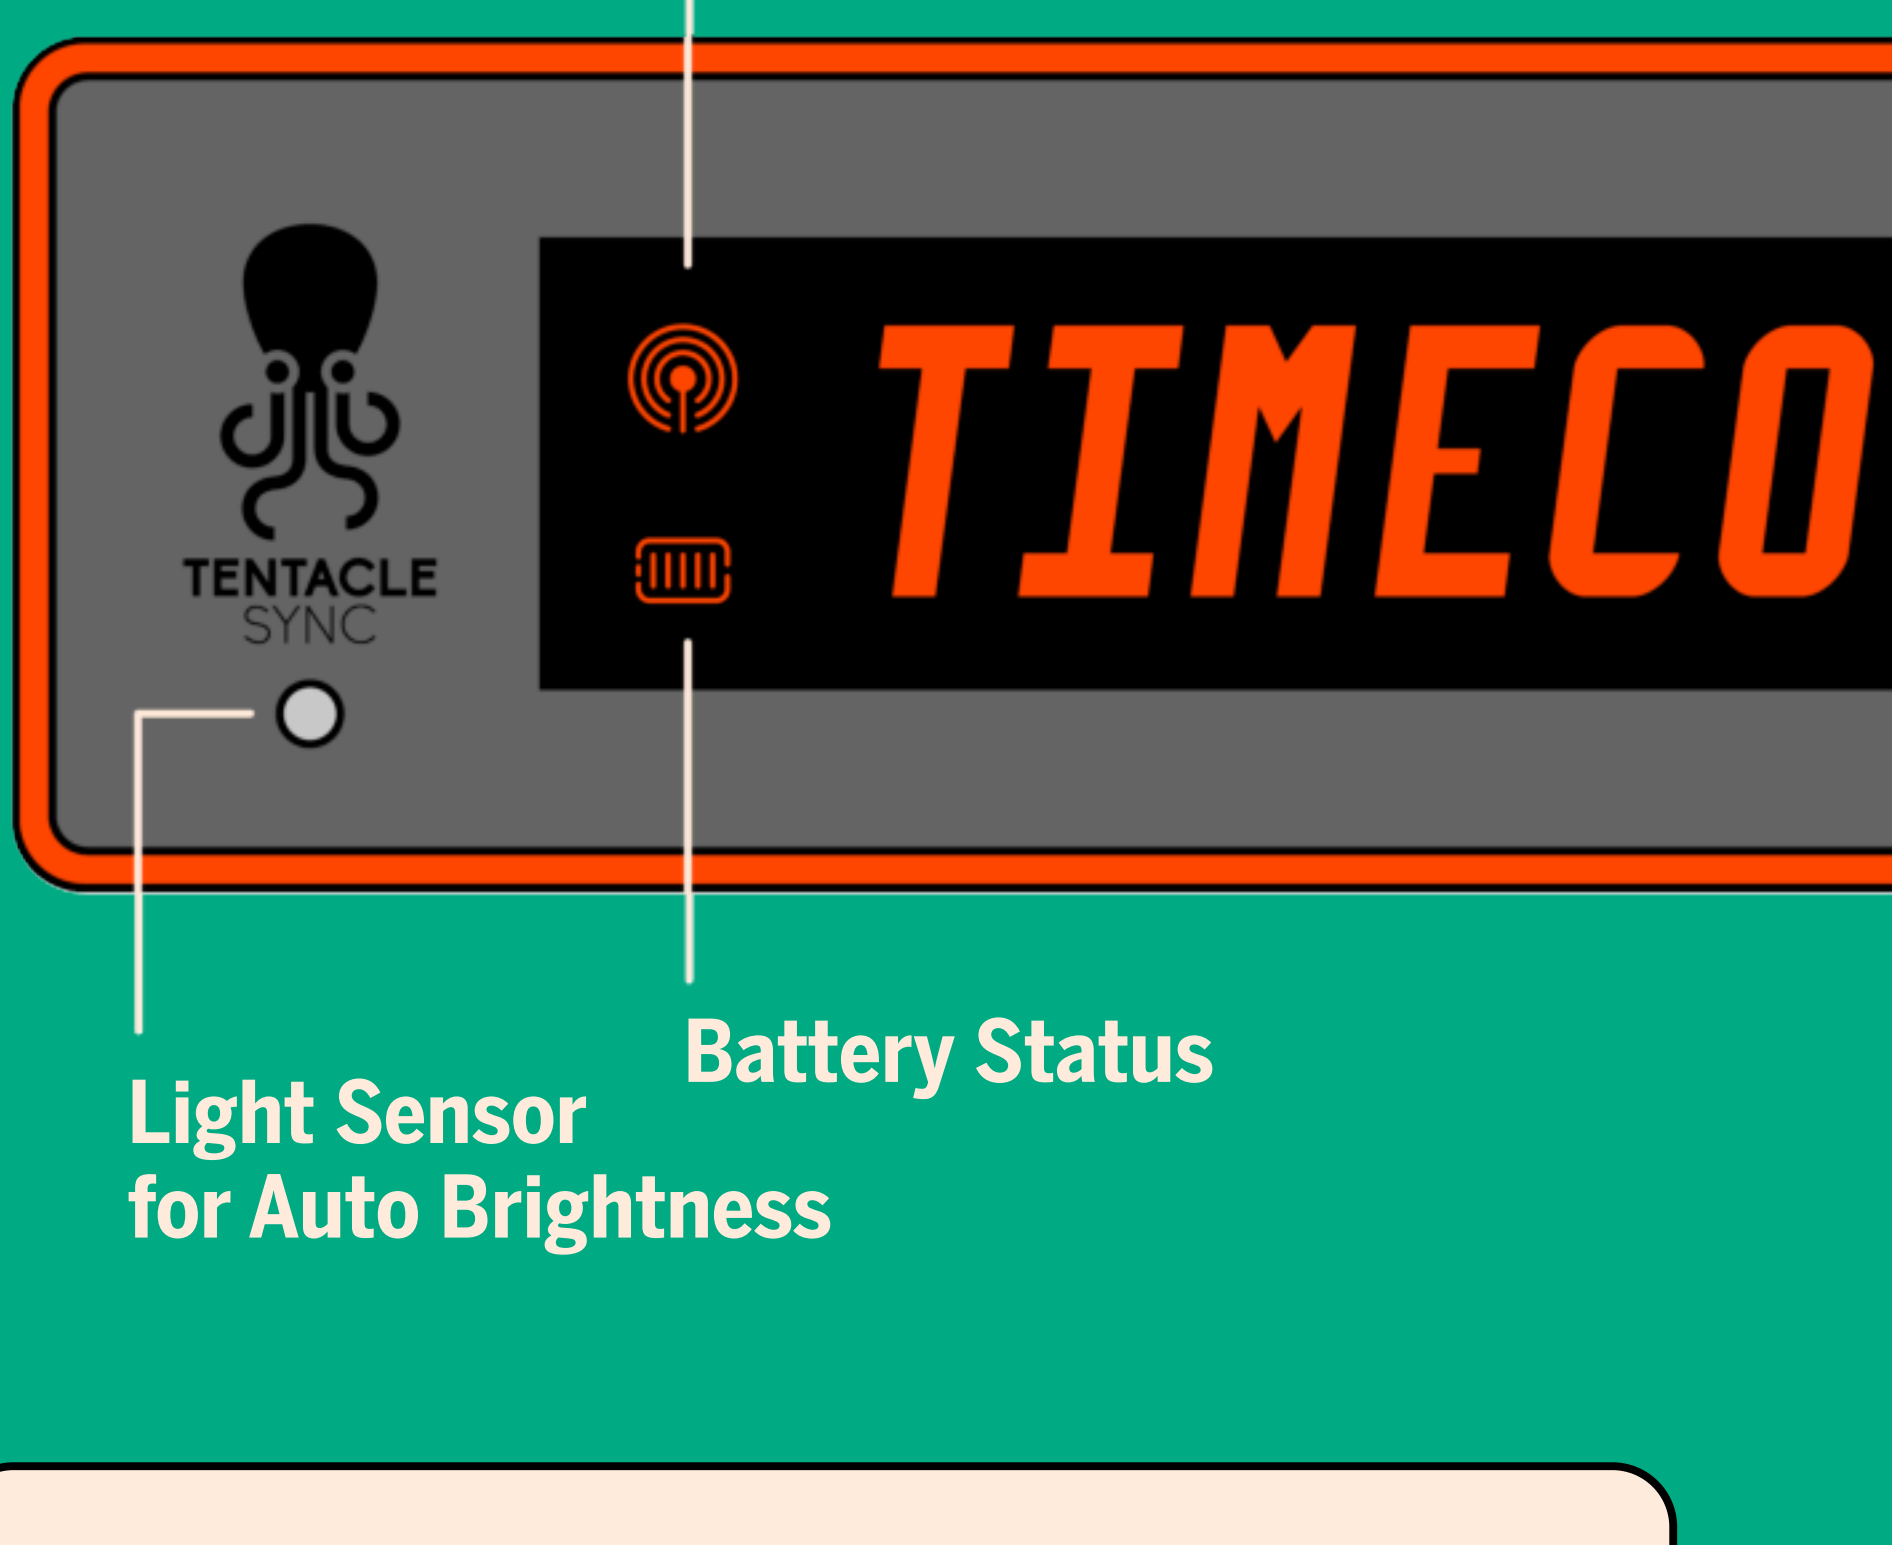

## BLUETOOTH

Appears when Timebar has a connection to a mobile device and is operated via Setup App

## BATTERY

Appears while in Mode Selection and indicates remaining battery capacity. Flashing indicates battery is nearly empty.