



FPGWORLD.COM

# INLINE

## 3000 SERIES BAIN MARIE 1200 IN-COUNTER/SQUARE HEATED

|              |                               |
|--------------|-------------------------------|
| RANGE        | INLINE 3000 SERIES BAIN MARIE |
| TEMPERATURE  | HEATED                        |
| MODEL        | IN-3B12-SQ-FF-IC              |
| FRONT        | SQUARE/FIXED FRONT            |
| INSTALLATION | IN-COUNTER                    |
| HEIGHT       | 771mm                         |
| WIDTH        | 1200mm                        |
| DEPTH        | 662mm                         |

|                                      |                |
|--------------------------------------|----------------|
| TEMPERATURE RANGE                    | +30°C – +110°C |
| RECOMMENDED CORE PRODUCT TEMPERATURE | +65°C – +80°C  |
| ENVIRONMENTAL TEST CONDITIONS        | 22°C / 65% RH  |

### FEATURES

- High energy efficiency: 1.2 kWh per hour (average)
- Cabinet operating temperature range +30°C - +110°C  
Recommended core product temperature +65°C - +80°C

- Smart display with double-glazed glass finished with a black trim

#### Fixed Front Heated Display

- Fitted with halogen heat lamps, with 3000 hour warm white lighting
- Supplied with 3x 1/1 gastronorm dishes 65mm deep

#### Operational Excellence

- Sliding doors (staff side) and fixed front (customer side)
- Constructed from stainless and mild steel with fully double-glazed, toughened safety glass for maximum energy efficiency, climate control and durability
- Low wattage density element provides even temperature distribution
- Dry operation well only
- Designed to be installed into joinery



Showing : Inline 3000 Series Bain Marie heated 1200mm square in-counter fixed front

### OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Add a holding shelf
- Branded decals
- Rear door or end glass mirror application
- GN pans (various sizes)
- GN dividers
- Forward-facing controls
- Custom joinery solution



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM

### HEATED DATA

| MODEL            | TEMPERATURE RANGE | RECOMMENDED CORE PRODUCT TEMPERATURE | ENVIRONMENTAL TEST CONDITIONS | HEATING                                                  |
|------------------|-------------------|--------------------------------------|-------------------------------|----------------------------------------------------------|
| IN-3B12-SQ-FF-IC | +30°C – +110°C    | +65°C – +80°C                        | 22°C / 65% RH                 | Low wattage density element / 2x 100 watt linear halogen |

### ELECTRICAL DATA

| MODEL            | VOLTAGE   | PHASE  | CURRENT | E24H (kWh) | kWh per hour (average) | IP RATING | MAINS                 |                              | HEAT LAMPS                 | HALOGEN LIGHTING |            |
|------------------|-----------|--------|---------|------------|------------------------|-----------|-----------------------|------------------------------|----------------------------|------------------|------------|
|                  |           |        |         |            |                        |           | CONNECTION            | CONNECTION PLUG <sup>1</sup> |                            | HOURS            | COLOUR     |
| IN-3B12-SQ-FF-IC | 220-240 V | Single | 7.8 A   | 28.8       | 12                     | IP 22     | 3 metre, 3 core cable | 10 amp, 3 pin plug           | 2x 100 watt linear halogen | 3000             | Warm white |

<sup>1</sup>Please advise country to change plug specification.

### CAPACITY, ACCESS & CONSTRUCTION

| MODEL            | DISPLAY AREA        | NO. OF 1/1 PANS | ACCESS FRONT | ACCESS REAR   | CHASSIS CONSTRUCTION         |
|------------------|---------------------|-----------------|--------------|---------------|------------------------------|
| IN-3B12-SQ-FF-IC | 0.45 m <sup>2</sup> | 3               | Fixed front  | Sliding doors | Stainless 304 and mild steel |





### DIMENSIONS

| MODEL            | H x W x D mm (Uncrated) | MASS (Uncrated) |
|------------------|-------------------------|-----------------|
| IN-3B12-SQ-FF-IC | 771 x 900 x 662         | - kg            |

Crated weights and dimensions vary. Please contact us for information on your shipment.

#### Installation note:

Model cutout dimensions: IN-3B12-SQ-FF-IC models require 1178 x 650mm benchtop cutout (see product manual for installation guide).

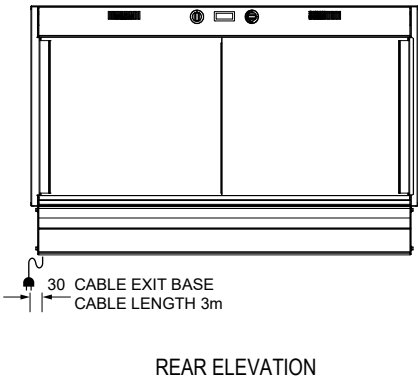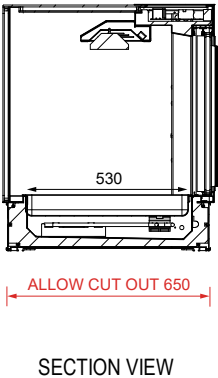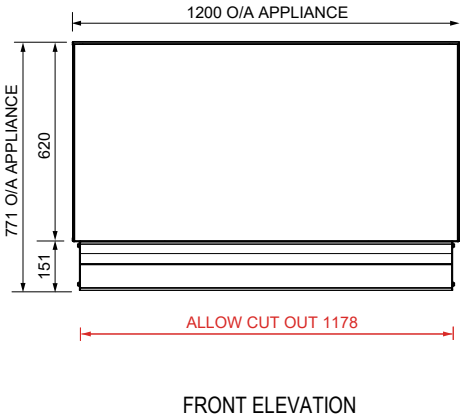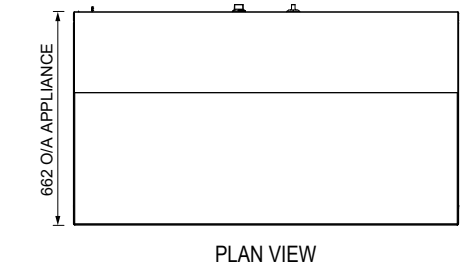

More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.

