

NEXTECH


QM3742



Wired Reversing Camera with 7" LCD

Instruction Manual

MONITOR:

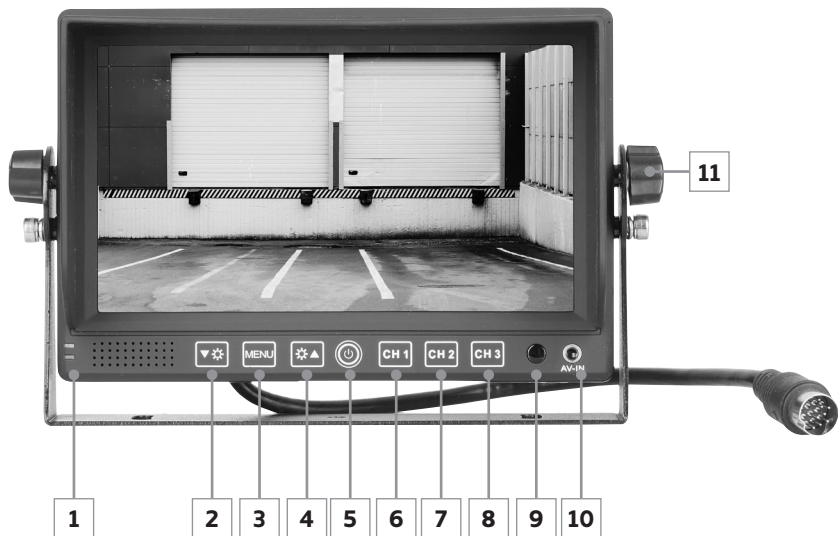

1	Dimmer Sensor Window
2	Down Button
3	Menu Button
4	Up Button

5	Power Button
6	Channel 1
7	Channel 2
8	Channel 3

9	R/C Window
10	AV-IN
11	Bracket Knob

CAMERA:

- QC3536:
12V Infrared Reversing Camera
with Mounting Bracket
- CCD, 120° Viewing Angle
- High Resolution Camera



MONITOR SPECIFICATIONS:


Display:	7"
Aspect Ratio:	16:9
Luminance:	300cd/m ²
Resolution:	800 x 480 RGB
Audio & Video:	3 ways video input, 2 ways audio input, 1 AV input from the front panel
System:	PAL/NTSC (Automatic)
Voltage:	12-24V DC
Language:	English, Chinese
OSD Menu:	Display menu, Brightness, Colour and Contrast adjustments
Built-in Speaker:	Yes
Bracket Accessories:	U type bracket
Sunshade:	Included and removable

CAMERA SPECIFICATIONS:

Sensor:	SHARP 1/4 CCD
Resolution:	420 TV Line
Illumination:	0.5Lux IR night vision
Viewing Angle:	120°
Images:	Mirror & Original image
System:	PAL/NTSC
Waterproof Class:	IP68, Aluminium alloy shell
Anti-shock Class:	4G
Power Supply:	12V-24V DC
Maximum Current:	<250mA
Connector:	4 pin/RCA
Working Temperature:	-30°C to 70°C
Dimensions:	86.5(W) x 77(H) x 75(D)mm



CONNECTION:

4 Pin (7")


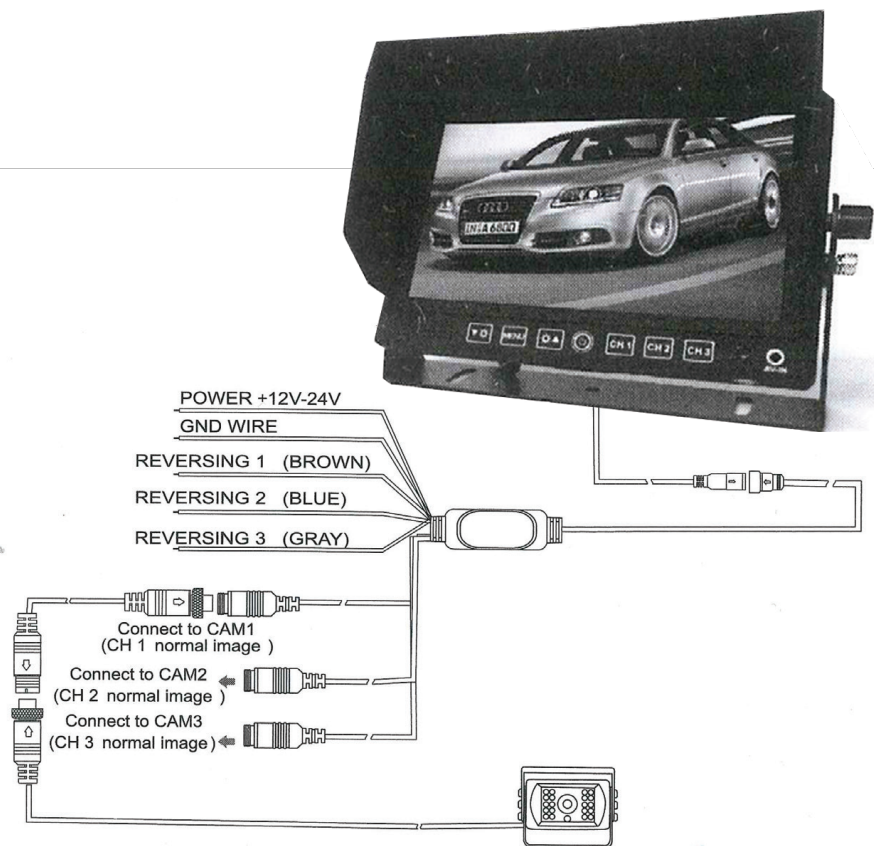


MONITOR STANDARD INSTALLATION:



1. Remove the screws from the side. Place the U-bracket where desired and lock with screws as shown in the pictures.




2. Place the monitor onto the U-bracket and tighten with screws.



3. Once the installation is completed, the monitor can be tilted 30° up or down.

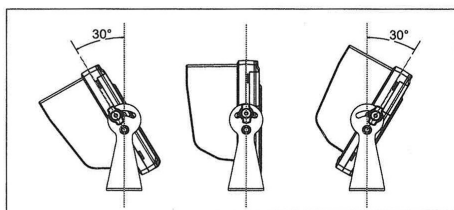

BOX CONTENTS:

1.Hexagon wrench *1	2.User manual *1
	
3.Power cable*1	4 .4pin with adaptor leads *1
	
5 .AV-IN Cable*1	6.Sun shade *1
	
7.Bracket Accessories*1	
	

NOTES:

Distributed by:
Electus Distribution Pty. Ltd.
320 Victoria Rd, Rydalmere
NSW 2116 Australia

www.electusdistribution.com.au

Made in China