




OWNER'S MANUAL
TX1



2" DIAMETER 0.5" VC
PEI DOME TWEETER

TWEETER CON DOMO PEI DE
2" CON BOBINA DE 0.5"

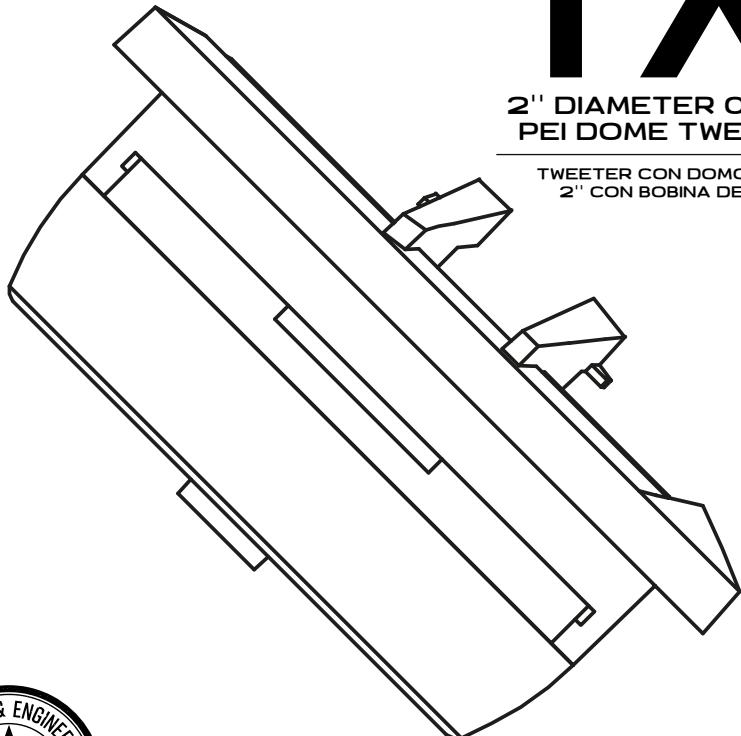

AVAILABLE IN RED (TX1R) OR SILVER (TX1S)
DISPONIBLE EN ROJO (TX1R) O PLATEADO (TX1S)

TXI

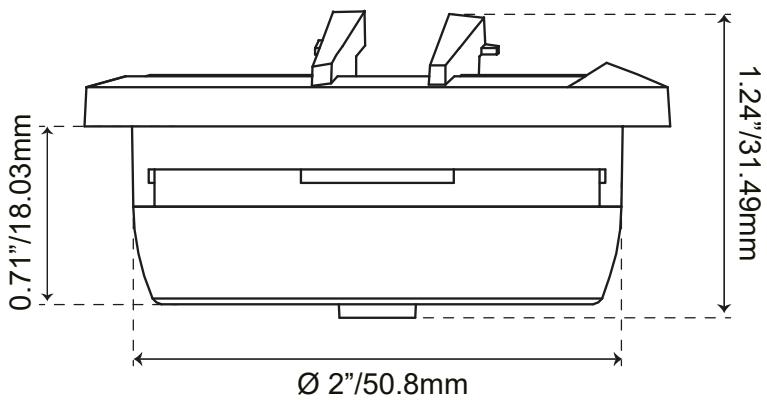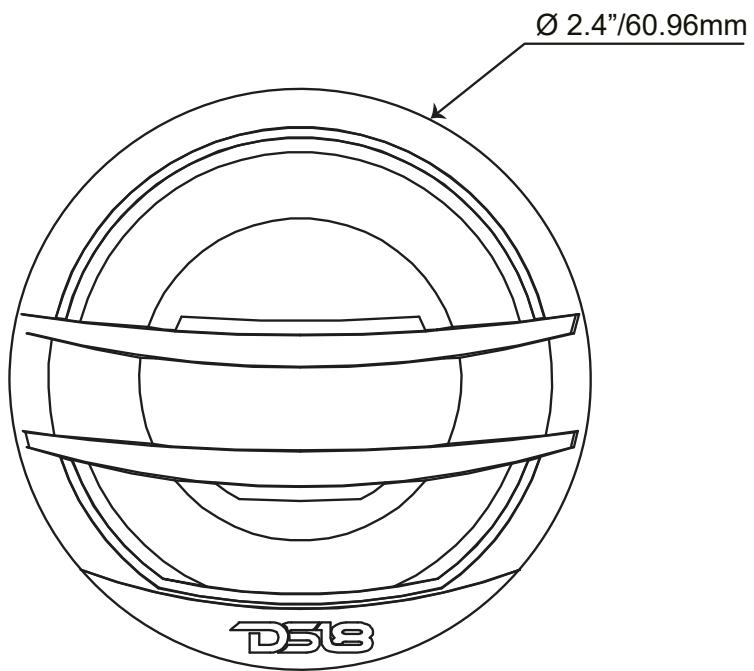



DSB®

Specifications / Especificaciones:

Nominal Diameter / Diámetro Nominal.....	2"
Nominal Impedance / Impedancia Nominal.....	4 ohms
AES Power Handling / Manejo de Potencia AES.....	25 Watts
Program Power Handling / Manejo de Potencia del Programa.....	50 Watts
Peak Power Handling / Manejo de Potencia Pico.....	200 Watts
Sensitivity (1w/1m) / Sensibilidad (1w/1m)	88dB
Frequency Response / Respuesta de Frecuencia.....	2KHz-20KHz
Recommended Hi Pass Crossover / Crossover de Paso Alto Recomendado.....	3KHz

Motor:

VC Diameter / Diámetro de la Bobina de Voz.....	0.5"
VC Former Material / Material Interior de Bobina Móvil.....	KSV
Diaphragm Material / Material del Diafragma.....	PEI Dome / Cupula PEI
Magnet Material / Material del Imán.....	Ferrite / Ferrita
Body Material / Material del Cuerpo.....	Plastic / Plastico

Measurements / Medidas:

Overall Diameter / Diámetro Total.....	2.4"/60.96mm
Overall Depth / Profundidad Total.....	1.24"/31.49mm
Front Mount Baffle Cutout / Corte del orificio de montaje.....	2"/50.8mm
Mouting Depth / Profundidad de Montaje.....	0.71"/18.03mm

WE LIKE IT LOUD



FOR MORE INFORMATION
PLEASE VISIT
DS18.COM

WE LIKE IT LOUD



DS18®