


单色黑白印刷





Switch x1
Wiring x1

If you have any questions, please contact us at

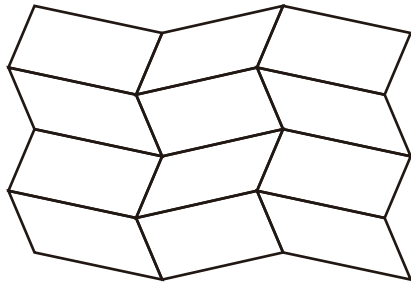

Scan QR code or visit
ask@minoston.com
and www.minoston.com



Ground

Load

Line

Neutral

— Line (hot) — black (connected to power)


— Neutral — white

— Load — black (connected to lighting)


1. Unscrew: carefully turn the screw counterclockwise to leave enough space for the wire to be inserted. Do not unscrew the screws completely.
 2. Press down: Once loosened, use your finger so it catches the thread.
 3. Insert the wire: make sure the wire is completely straight, then insert it into the terminal while holding down the screw. Do not wrap the wire around the screw!
 4. Tighten: Turn the screw clockwise to tighten the wire. Make sure the wires are locked!
- Note: There are 2 holes for each terminal can be used in the connection.
You can use a jump wire or the second hole at the terminal to connect.



1. Tool: Please prepare a flat head screwdriver.
2. Turn power OFF at circuit breaker or fuse box.



3. Remove wallplate.
4. Remove the switch mounting screws.
5. Disconnect the wires and label them after remove the old switch. (Please use our sticker)
6. Carefully remove the switch from the switch box. (DO NOT disconnect the wires.)
7. There are up to four screw terminals on the smart switch, these are marked (Please check <HOW TO INSTALL THE WIRES>)
8. Fix the wallplate with screws after wiring succeeded. (Please use our screws.)
9. The Ground was excluded from the diagram to simplify the illustration. Please Make sure all ground wires are connected to all switches respectively.

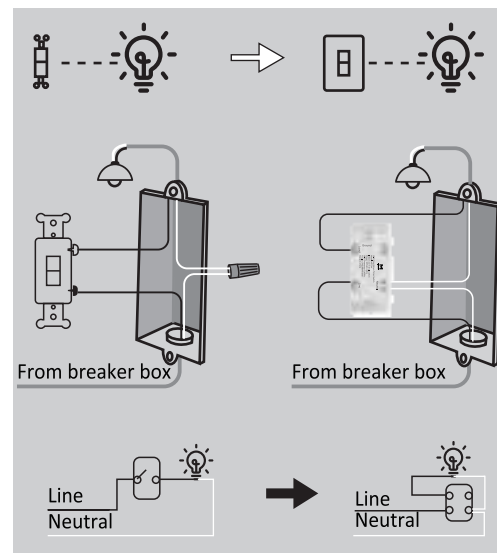

1. Turn on Bluetooth on your phone.
2. Open Minoston or Smart Life APP and log in to your account.
3. Make sure the device indicator light is flashing. If it is not flashing, press and hold the "30 min" button for 5 seconds to put the device into network pairing mode.
4. Click "Add device" to add the device.
5. The APP will search for nearby devices and then display them on the "Add device" page. After finding the device, click "Add".
6. Select wifi (2.4Ghz band) and enter the password.
7. Wait for the addition to be completed.

M
MINOSTON®

Scan the QR code above or search Minoston on the Apple App Store or on Google Play



The Wi-Fi Countdown Timer Switch can be also used with Amazon Echo and Google Home. Please scan the QR code below and follow the instructions if you have any trouble pairing with them.

Follow the steps in the Amazon Alexa or Google Assistant app to connect the Minoston app or select "Support" in the Minoston app

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference,
- (2) This device must accept any interference received, including interference that may cause undesired operation.

changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a

residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

This device is intended for installation in accordance with the National Electric Code and local regulations in the United States, or the Canadian Electrical Code and local regulations in Canada. If you are unsure or uncomfortable about performing this installation consult a qualified electrician.

Please DO NOT use this plug to control Medical or Life Support equipment. This device should never be used to control the On/Off status of Medical and/or Life Support equipment.

Risk of Fire / Risk of Electrical Shock / Risk of Burns

1. READ AND FOLLOW ALL SAFETY INSTRUCTIONS.
2. Read and follow all instructions that are on the product or provided with the product.
3. do not use an extension cord.
4. Reference the National Electrical Code, NFPA 70, specifically for the installation of wiring and clearances from power and lighting conductors.
5. Installation work and electrical wiring must be done by qualified person(s) in accordance with all applicable codes and standards, including fire-rated construction.
6. do not install or use within 10 feet of a pool

Risk of Electric Shock.

When used outdoors, install only to a covered Class A GFCI protected receptacle that is weatherproof with the power unit connected to the receptacle. If one is not provided, contact a qualified electrician for proper installation. Ensure that the power unit and cord do not interfere with completely closing the receptacle cover.

Risk of Electric Shock. Mount the unit at a height greater than 1 foot from the ground surface

Risk of Electric fire. install only to a receptacle protected by 20A branch circuit over current protection.

SAVE THESE INSTRUCTIONS – This manual contains important safety and operating instructions.