

# BatPac™

LED Battens With Push Clip Release

PRO  
Range

5 Year Warranty

L70 50,000hrs

Emergency option

White finish

Push clip release and hinged gear tray for fast installation

Push-fit terminals

Knockouts for cable entry on both ends

Multiple BESA mounting points (matches traditional fluorescent)

IK08 rated

-20 - +45° ambient operating temperature


Opal polycarbonate diffuser for even light distribution

Can be surface mounted or suspended

COMING  
SPRING  
2023


PRO  
Range

Linears

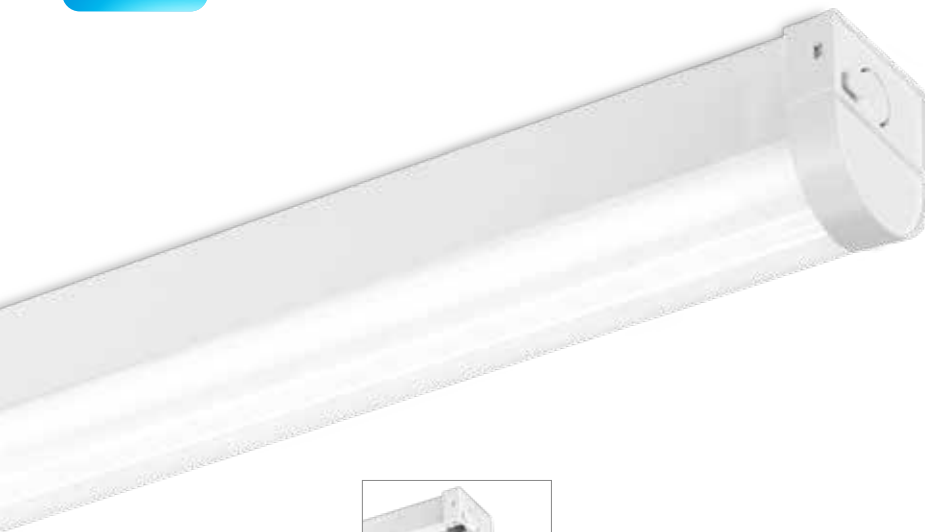

Quick Release Hinged  
Gear Tray for Faster  
Installation

EN-BA1533



Cat. No. Type Watts Colour Lumens lm/W Length (ft)


## Single

|                      |         |     |       |        |     |   |
|----------------------|---------|-----|-------|--------|-----|---|
| <b>EN-BA1222*/40</b> | Non-Dim | 20W | 4000K | 2800lm | 140 | 4 |
| <b>EN-BA1533*/40</b> | Non-Dim | 31W | 4000K | 4300lm | 139 | 5 |
| <b>EN-BA1839*/40</b> | Non-Dim | 35W | 4000K | 4900lm | 140 | 6 |

## Twin

|                      |         |     |       |        |     |   |
|----------------------|---------|-----|-------|--------|-----|---|
| <b>EN-BA1243*/40</b> | Non-Dim | 38W | 4000K | 5300lm | 139 | 4 |
| <b>EN-BA1563*/40</b> | Non-Dim | 56W | 4000K | 7800lm | 139 | 5 |
| <b>EN-BA1873*/40</b> | Non-Dim | 65W | 4000K | 9100lm | 140 | 6 |

\*Add suffix EM for Emergency



EN-BA1222

(L) 1170 mm Length  
(W) 61mm Width  
(H) 71 mm Height

EN-BA1243

(L) 1170 mm Length  
(W) 61mm Width  
(H) 71 mm Height

EN-BA1533

(L) 1470 mm Length  
(W) 61mm Width  
(H) 71 mm Height

EN-BA1563

(L) 1470 mm Length  
(W) 61mm Width  
(H) 71 mm Height

EN-BA1839

(L) 1734 mm Length  
(W) 61mm Width  
(H) 71 mm Height

EN-BA1873

(L) 1734 mm Length  
(W) 61mm Width  
(H) 71 mm Height