


User Manual

21.5in Computer Monitor

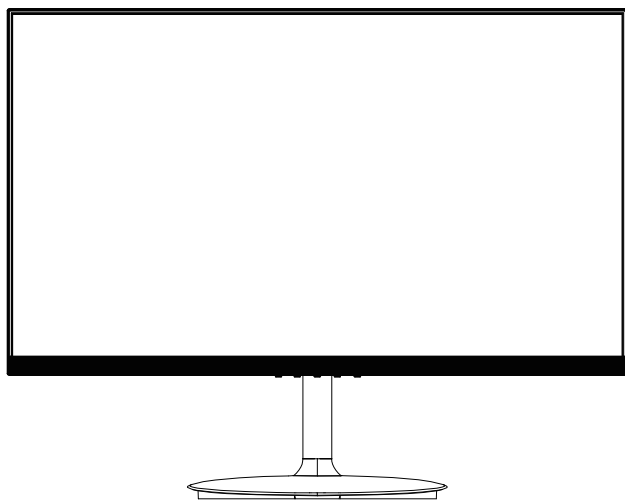

Model: 22D2F

Before using this product, please carefully read through
this User Manual and keep it properly

Table of Contents

Notices-----	3
Product introduction -----	4
Packing list-----	4
Usage-----	4
Description of buttons-----	5
Cable connection-----	5
Explanation of indicators-----	5
Installation-----	6
Installation of base-----	6
Adjusting the monitor-----	7
OSD menu-----	8
Menu description-----	8
Basic parameters-----	10

- Keep the monitor away from water sources or damp places, such as bath rooms, kitchens, basements and swimming pools.
- Make sure the monitor is placed on a flat surface. If the monitor falls down, it may cause human injury or device damage.
- Store and use the monitor in a cool, dry and well ventilated place, and keep it away from emission and heat sources.
- Do not cover or block the vent hole in the rear casing, and do not use the product on a bed, sofa, blanket or similar objects.
- The range of the supply voltage of the monitor is printed on the label on the rear casing. If it is impossible to determine the supply voltage, please consult the distributor or local power company.
- If the monitor will not be used for a long period, please cut off the power supply to avoid electric shock in rainy days and damage due to abnormal supply voltage.
- Please use a reliable earthing socket, do not overload the socket, or it may cause fire or electric shock.
- Do not put foreign matters into the monitor, or it may cause short circuits resulting fire or electric shock.
- Do not disassemble or repair this product by self to avoid electric shock. If faults occur, please contact the after-sales service directly.
- Do not pull or twist the power cable forcedly.
- There is a polarizer layer (not a protective film) on the surface of the screen. Do not peel it off, or the product may be damaged and the warranty will be invalid.

Product introduction

Packing list

- Please check that the package of the monitor contains all parts. If any part is lost, please contact the distributor.
- The color and shape of parts may vary with models. Figures in this User Manual are for reference only.
- Wires supplied may vary with purchased products. Figures in this User Manual are for reference only.



Monitor



Bracket assembly



Base



Screws



HDMI signal cable



Power adapter




User manual

- Redundant screws can be used as spare screws.


Usage

Description of buttons

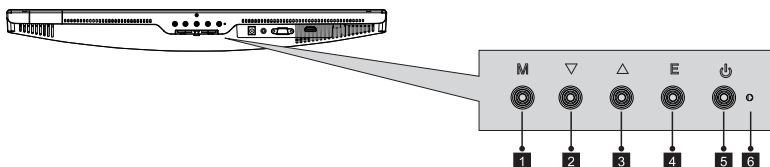

	Button	Function
1	M Menu Button	Appuyer pour faire apparaître le menu OSD ou accéder aux sous.
2	▽ Down Button	Appuyer pour vous déplacer vers le bas dans les menus.
3	△ Up Button	Appuyer pour vous déplacer vers le haut dans les menus.
4	E Exit Button	Appuyer pour sortir du menu.
5	⏻ Power Button	Appuyer pour allumer ou éteindre le moniteur.
6	Indicateur LED	Change de couleurs pour indiquer le statut.

Cable connection:



* The bottom interface configuration at the back of the monitor varie with products.

* Note: If the power cable or signal cable is damaged, you must replace it with special soft cables or special components purchased from the manufacture or maintenance department.

HDMI interface




Use the HDMI cable to connect the HDMI IN interface of the product to the HDMI OUT interface of a PC.



Use the HDMI-DVI cable to connect the HDMI IN interface of the product to the DVI OUT interface of a PC.



VGA interface



Use a VGA cable to connect the VGA interface of the product to the VGA interface of the PC.



AUDIO OUT



Connect audio outputting devices such as earphones to the AUDIO OUT interface.




Power Adapter



Please connect the power adapter plug to the corresponding power port of the monitor, and connect the other end to a properly grounded power outlet.



Explanation of indicators




Indicator

Indicator: A steady blue light indicates that the power is on and the monitor is operating normally. Blue light flashes to indicate There is no video source and no horizontal or vertical signal or low voltage is detected. Make sure your computer It is turned on and all video cables are fully plugged in and/or connected.

Installation


Installation of base

1. Open the package to take out foams and put them on a flat tabletop.




2. Deflection the bracket to a certain angle to align it with the circular groove of the base, close it tightly, and then rotate it clockwise to make the bracket snap into the base to complete the assembly of the base.


2.1 Align the bracket with the base slot.



2.2 The bracket is tightly attached to the base, rotate the bracket clockwise.



2.3 Snap the bracket into the base.




2.4 Lock the screws in the accessory bag into the bottom position.




2.3 Complete the bracket and base assembly.





3. Place the head of the assembled base bracket flat on the slot on the lower side of the rear shell, stick it tightly, and push up to make the base bracket snap into the rear shell.




Installation of base


-  4. Please do not put your hands in the gap between the bracket and the shell to prevent pinching!




-  5. After the base is installed, please avoid holding the base upside down to prevent the machine from falling!




6. After assembly, simply hold the stand with hand to stand the monitor upright.



-  Note: During standing of the whole monitor, do not press the liquid crystal screen with hand to avoid damage to the screen.

Adjusting the monitor




Tilting angle
 $-5.0^{\circ}(\pm 2.0^{\circ}) - +15^{\circ}(\pm 2.0^{\circ})$

OSD menu


Menu description


- The color and shape of the OSD menu of the actual computer may be slightly different from them shown in the figure.
- Specifications of the OSD menu may change with improvements of functions without prior notice.


The on-screen display (OSD) menu can be used to adjust the settings of the monitor and is displayed on the screen after turning on the monitor and pressing the  button.


1. Press one of the buttons (**M**, **▼**, **▲**, **E**, ) to activate the browser screen.



	Confirm and enter the main menu		Game Crosshair
	Scene mode		Exit the menu interface
	Power switch		

2. Press **M** () to enter the OSD screen.

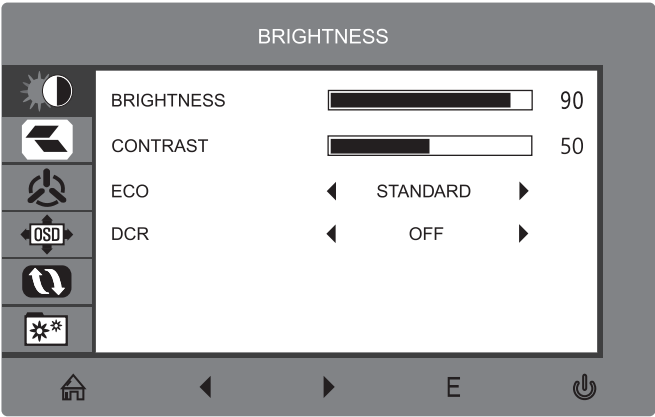

3. Press **▼** or **▲** to browse through the functions.
- Select the desired function, then press the **M** button to enter the submenu
 - Press **▼** or **▲** to browse the sub-menus, and then press the **M** key to confirm the selection of the desired function.
 - Press **▼** or **▲** to select an option, then press **M** to confirm the setting and exit the current menu.
4. Press **E**  to exit the menu interface.

- Functions of the monitor vary with models, and the functions in this manual are for reference only.

BRIGHTNESS	BRIGHTNESS	0-100
	CONTRAST	0-100
	ECO	STANDARD/GAME/RTS/FPS/MOVIE/TEXT
	DCR	ON/OFF
IMAGE	H.POSITION	0-100
	V.POSITION	0-100
	CLOCK	0-100
	PHASE	0-100
	ASPECT	WIDE/AUTO/4:3
COLOR TEMP.	COLOR TEMP.	WARM/COOL/USER
	RED	0-100
	BLUE	0-100
	GREEN	0-100
OSD SETTING	LANGUAGE	ENGLISH / FRANÇAIS / DEUTSCH / 简体中文 / ITALIANO / ESPAÑOL / PORTUGUÊS / TURKCE / POLSKI / NEDERLANDS / РУССКИЙ / 한국/日本語
	OSD H. POS.	0-100
	OSD V. POS.	0-100
	OSD TIMEOUT	5-60
	TRANSPARENCY	0-100
RESET	IMAGE AUTO ADJUST	——
	COLOR AUTO ADJUST	——
	RESET	None
MISC	SIGNAL SOURCE	HDMI/VGA
	LOW BLUE RAY	0-100
	MUTE	ON/OFF
	VOLUME	ON/OFF
	Adaptive Sync	ON/OFF

Basic parameters

Product Name	Liquid Crystal Display	
Product model	22D2F	
Screen Size	21.5 inches	
Aspect Ratio	16:9	
Viewing Angle	178°(H) / 178°(V)	
Pixel pitch	0.08275 x 0.24825mm	
Contrast ratio	3000:1 (TYP)	
Colors	16.7M	
Resolution	1920*1080	
Maximum refresh rate	75Hz	
Power specifications	DC 12V --- 2.5A The standard voltage and current may vary with countries, please refer to the label at the back of the product.	
Product Dimentions Normal base	Without base	495.20 × 292.70 × 58.72 mm/ approx. 2.047 kg
	With base	495.20 × 391.50 × 207.33 mm/ approx. 2.34 kg
	Carton Dimensions	573 × 120 × 385mm
	Gross weight	3.36kg
Tilting angle	Forward titling: 5°±2° ; Backward tilting : 15°±2°	
Height range	NA	
Rotation angle	NA	
Vertical angle	NA	
Environmental conditions	Action	Temperature: 0°C~ 40°C (32°F ~ 104°F) Humidity: 10%~90% RH (non-condensing)
	Storage	Temperature: -20°~ 60° (-4°F ~ 140°F) Humidity: 5%~95% RH (non-condensing)



The terms HDMI and HDMI High-Definition Multimedia Interface, and the HDMI Logo are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. in the United States and other countries.

This device complies with part 15 of the FCC Rules.

Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference,
- (2) this device must accept any interference received,
- (3) including interference that may cause undesired operation.

CAN ICES-3 (B)/NMB-3(B)

Made in China

物料号码	108.007.16932		
厂内型号	22D2F	厂外型号	22D2F
物料名称	说明书	品 牌	Fiodio
协力厂商		日 期	2022.3.11
规 格	140*210mm 12P		
要 求	封面封底120G铜版纸，内页80G铜版纸，单色印刷，骑马钉 所有文字、数字、英文字母、字符清晰可视、易读 且不易造成文字混淆，需提供使用材料的SGS和ROHS报告 同样材料，提供过的供应商不需要再次提供		
版 本	V02	设 计	潘巧纳
确 认		核 准	

备注:如不够页数，可以在封面封底的内面插入空白页