



FPGWORLD.COM

# INLINE

## 5000 SERIES 800 FREESTANDING/SQUARE AMBIENT

|              |                        |                          |
|--------------|------------------------|--------------------------|
| RANGE        | INLINE 5000 SERIES     |                          |
| TEMPERATURE  | AMBIENT                |                          |
| MODEL        | IN-5A08-SQ-FF-FS       | IN-5A08-SQ-SD-FS         |
| FRONT        | SQUARE/<br>FIXED FRONT | SQUARE/<br>SLIDING DOORS |
| INSTALLATION | FREESTANDING           |                          |
| HEIGHT       | 1443mm                 |                          |
| WIDTH        | 807mm                  |                          |
| DEPTH        | 770mm                  |                          |

CORE PRODUCT TEMPERATURE

AMBIENT

## FEATURES

### High energy efficiency: 0.05 kWh per hour (average)

- Cabinet operating at ambient temperature
- Smart display with double-glazed glass finished with a black trim

### Fixed Front or Sliding Doors Ambient Display

-  Three tiltable, height-adjustable stainless steel shelves and base are full cabinet width to support maximum display capacity
-  50,000 hour LED lighting system at 2758 lumens per metre in cabinet top and to each shelf
- Unique shelf mounted ticket strip front and rear: 30mm

### Operational Excellence

-  Sliding doors (staff side) and fixed front or sliding doors options (customer side)
-  Constructed from stainless and mild steel for durability with double-glazed, toughened safety glass
- Fan assisted air circulation to mitigate heat build-up
- Designed to be installed into joinery
- Fitted with adjustable 150mm legs (+30mm adjustment)



Showing : Inline 5000 Series ambient 800mm square freestanding fixed front

## OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Shelf trays: Toughened safety glass or mild steel. Colour and woodprint options available for steel shelf trays
- Adjustable 100mm legs (+25mm adjustment), lockable castors or unidirectional rollers
- Front access: Tilt front option
- External stainless steel chassis surround
- Angled base insert
- Rear deck assemblies
- Branded decals
- Thermal divider panels
- Rear door or end glass mirror application
- Custom joinery solution



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM

### AMBIENT DATA

| MODEL            | CORE PRODUCT TEMPERATURE |
|------------------|--------------------------|
| IN-5A08-SQ-XX-FS | Ambient                  |

### ELECTRICAL DATA

| MODEL            | VOLTAGE   | PHASE  | CURRENT | E24H (kWh) | kWh per hour (average) | IP RATING | MAINS                 |                              | LED LIGHTING |                |         |
|------------------|-----------|--------|---------|------------|------------------------|-----------|-----------------------|------------------------------|--------------|----------------|---------|
|                  |           |        |         |            |                        |           | CONNECTION            | CONNECTION PLUG <sup>1</sup> | HOURS        | LUMENS         | COLOUR  |
| IN-5A08-SQ-XX-FS | 220-240 V | Single | 0.23 A  | 120        | 0.05                   | IP 22     | 3 metre, 3 core cable | 10 amp, 3 pin plug           | 50,000       | 2758 per metre | Natural |

<sup>1</sup>Please advise country to change plug specification.

### CAPACITY, ACCESS & CONSTRUCTION

| MODEL            | DISPLAY AREA       | LEVELS           | ACCESS FRONT  | ACCESS REAR   | CHASSIS CONSTRUCTION         |
|------------------|--------------------|------------------|---------------|---------------|------------------------------|
| IN-5A08-SQ-FF-FS | 1.3 m <sup>2</sup> | 3 Shelves + Base | Fixed front   | Sliding doors | Stainless 304 and mild steel |
| IN-5A08-SQ-SD-FS | 1.3 m <sup>2</sup> | 3 Shelves + Base | Sliding doors | Sliding doors | Stainless 304 and mild steel |


### DIMENSIONS

| MODEL            | H x W x D mm (Uncrated) | MASS (Uncrated) |
|------------------|-------------------------|-----------------|
| IN-5A08-SQ-XX-FS | 1443 x 807 x 770        | 108 kg          |

Crated weights and dimensions vary. Please contact us for information on your shipment.

#### Installation note:

Model cutout dimensions: IN-5A08-SQ-XX-FS models require 760 x 725mm benchtop cutout. Joinery height 603mm (see product manual for installation guide). When installing this cabinet next to an adjacent Inline 5000 Series refrigerated cabinet, please install an Inline 5000 Series thermal divider panel (accessory) between them.

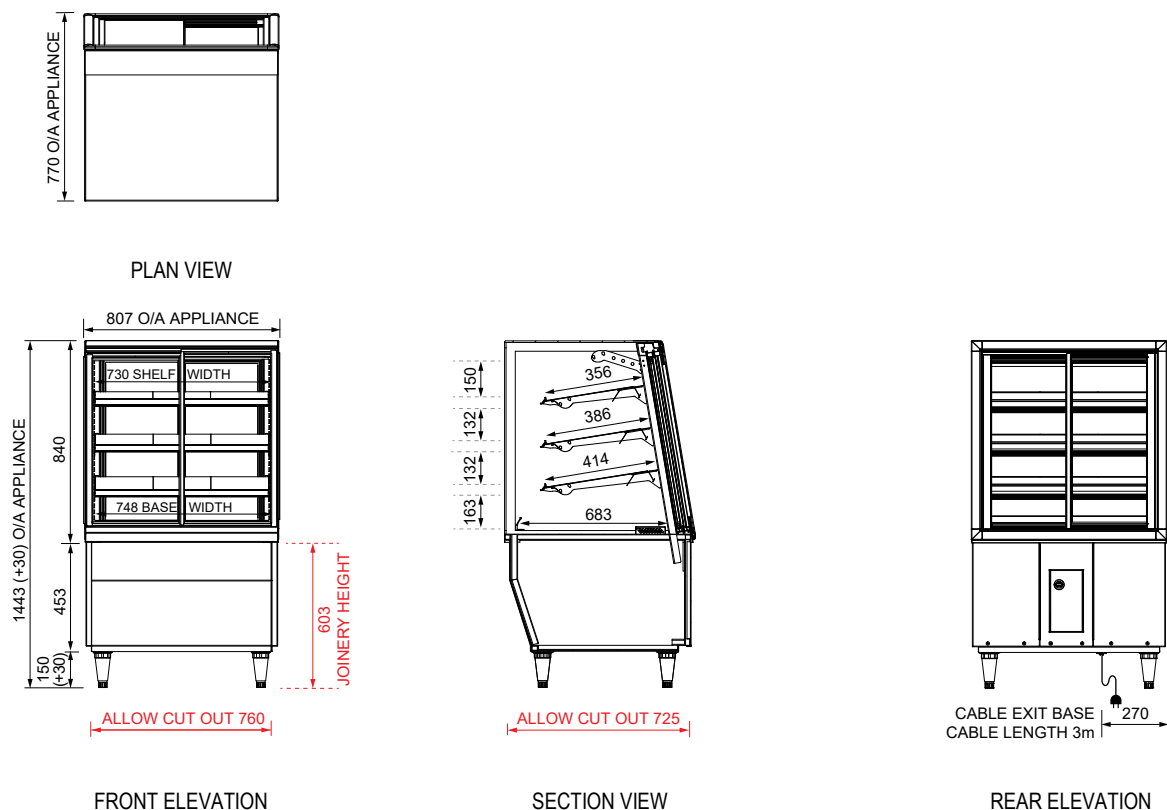

More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at [sales@fpgworld.com](mailto:sales@fpgworld.com) or visit [www.fpgworld.com](http://www.fpgworld.com) for full contact details for your region.

Worldwide  
contact  
details:

