

RCW-360 2G/4G/WIFI USER MANUAL

Elitech cloud login: www.i-elitech.com.




iOS APP
Scan the QR code or
download on the App Store



Android APP
Scan the QR code or
download on the Google Play


Appearance

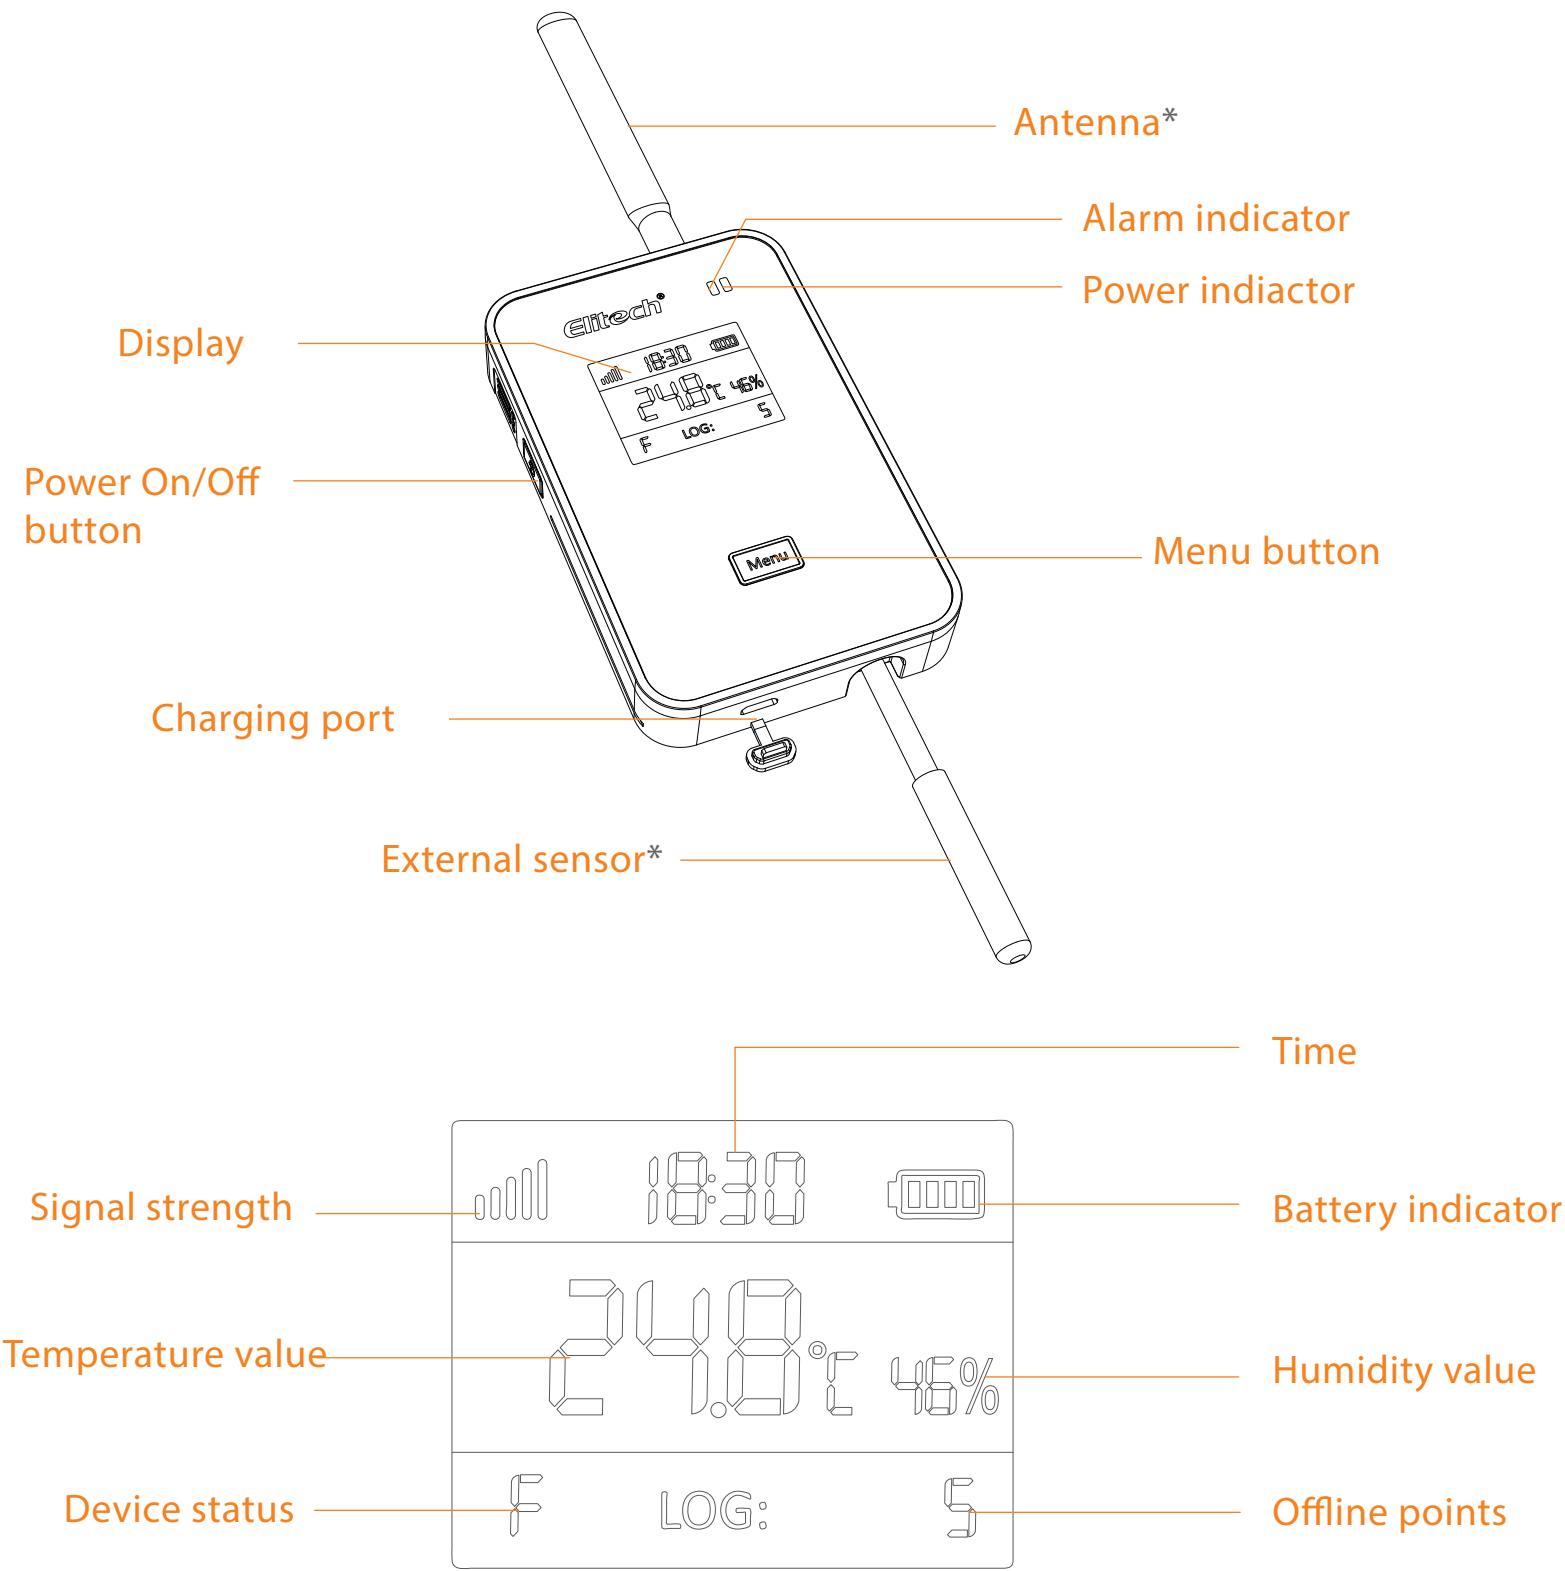

*The External sensor and Atenna on the product picture shown above is for illustration purpose only and may vary from the actual product.


2 Charging

Use a cable to connect USB port to the power adapter and plug the adapter to a power supply source. During charging, the device's Power indicator light will turn to green. When the device is fully charged, the green Power indicator light will turn OFF.

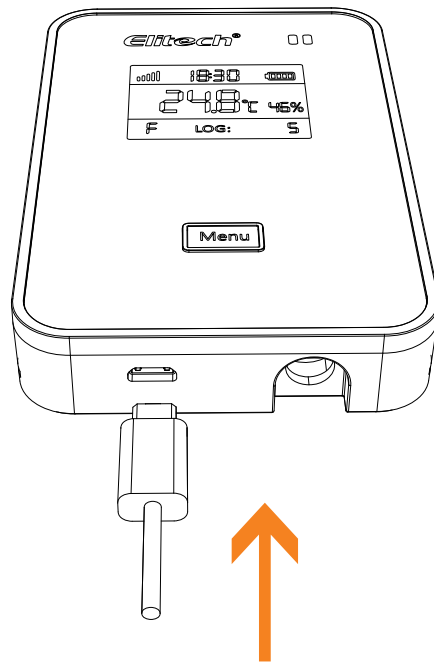

3 ON/OFF

- 1) ON: Press and hold the Power ON/OFF button for 3 seconds until you hear a beep sound. The screen will light on and the device is turned ON successfully
- 2) OFF: Press and hold the Power ON/OFF button for 3 seconds until you hear a beep sound. The screen will closed and the device is turned OFF successfully

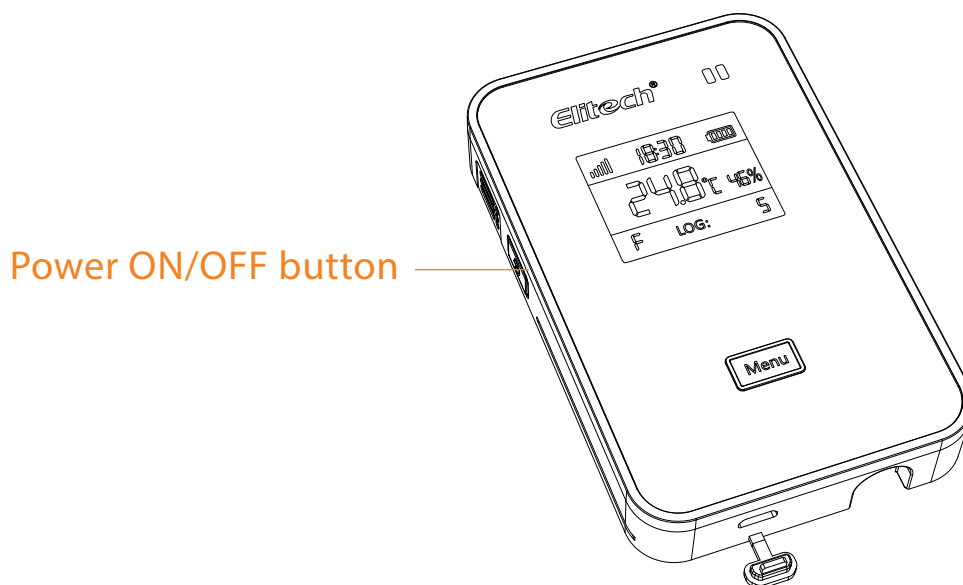


4 Elitech App

1. Download APP:

Please scan the QR code on the front of the manual or search 'Elitech' on the App store or Google Play to download the app.

2. Login


Register and login to your account.

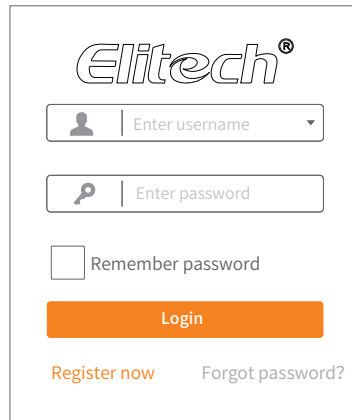

The login screen for the Elitech app. It features the Elitech logo at the top. Below the logo are two input fields: 'Enter username' with a user icon and 'Enter password' with a key icon. There is a checkbox labeled 'Remember password'. A large orange 'Login' button is positioned below the input fields. At the bottom, there are two links: 'Register now' and 'Forgot password?'.


6 Add device

Device: SIM Card Version

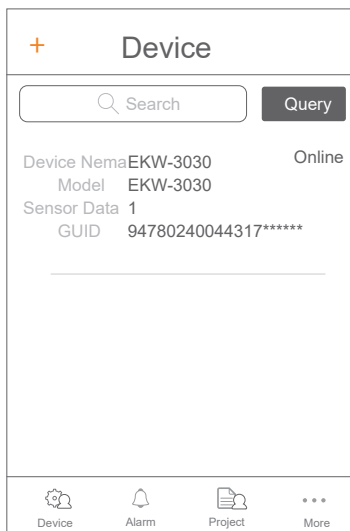


The 'Device' screen in the app. It has a title bar with a '+' icon and the word 'Device'. Below the title bar is a search bar with a magnifying glass icon and a 'Query' button. The main content area displays device information: 'Device Nema EKW-3030', 'Model EKW-3030', 'Sensor Data 1', and 'GUID 94780240044317*****'. The status 'Online' is shown in the top right. At the bottom, there is a navigation bar with icons for 'Device', 'Alarm', 'Project', and 'More'.

① Click '+'.

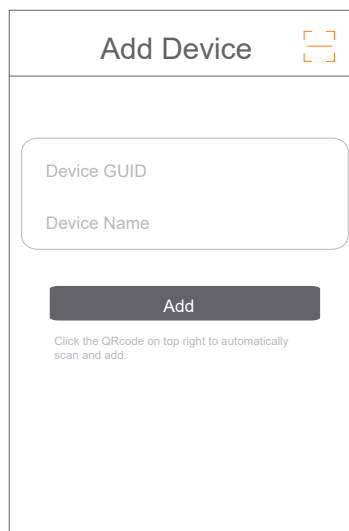

The 'Add Device' screen in the app. It has a title bar with the text 'Add Device' and a QR code icon. Below the title bar is a large input field for 'Device GUID'. Below that is a smaller input field for 'Device Name'. At the bottom, there is a large dark grey 'Add' button. Below the button, there is a small text instruction: 'Click the QRcode on top right to automatically scan and add.'

② Click and scan the QR code on the back of the device.

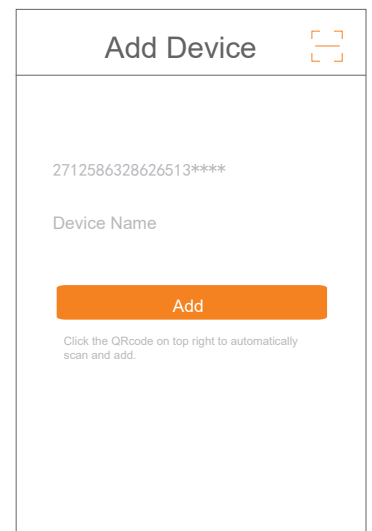


The 'Add Device' screen in the app, showing the result of a successful scan. The title bar has 'Add Device' and a QR code icon. The main content area displays the scanned QR code value: '2712586328626513****'. Below this is a field for 'Device Name'. At the bottom, there is a large orange 'Add' button. Below the button, there is a small text instruction: 'Click the QRcode on top right to automatically scan and add.'


③ Click 'Add' and the device will be added.

Device: WiFi version


- 1. Connect your mobile phones with your preferred WiFi/WLAN network.
- 2. Open the Elitech App.
- 3. Press and the hold menu button  for 10 seconds until segment screen displays 'F', which means the device is now ready for wifi configurations.




4. Please follow the steps 1 to 8 below for WiFi configurations:

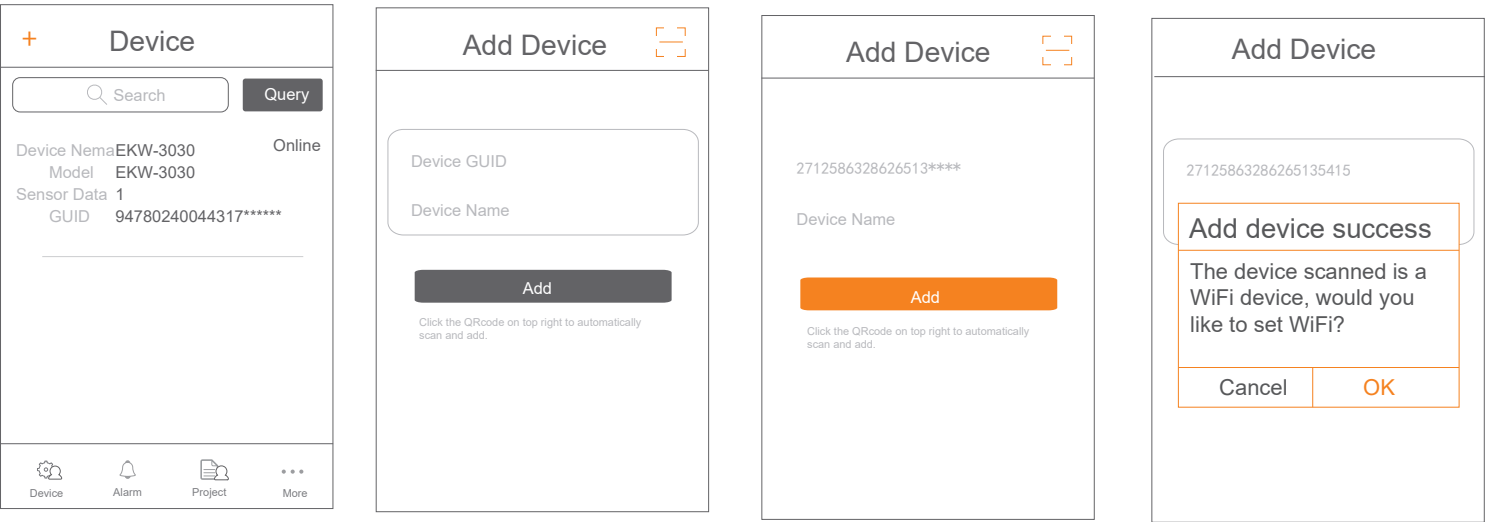


- ①Click '+'. ②Click and scan the QR code on the back of the device.
- ③Click 'Add' and the device will be added. ④ Click 'OK'.

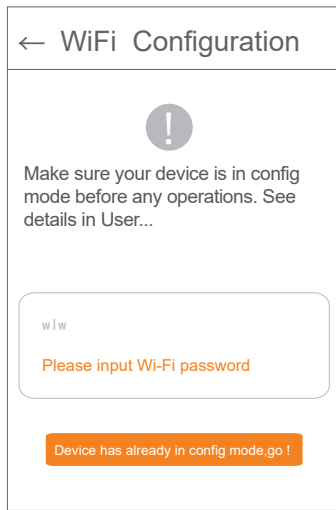


⑤ Enter Wi-Fi password.

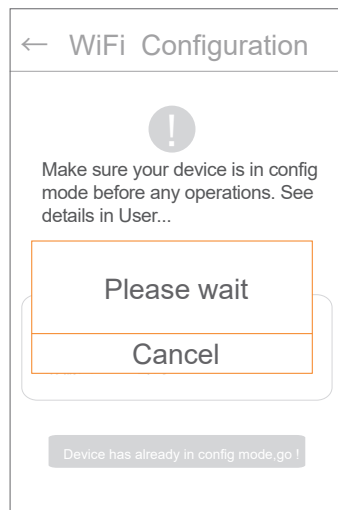

⑥ Wait for Wi-Fi settings.

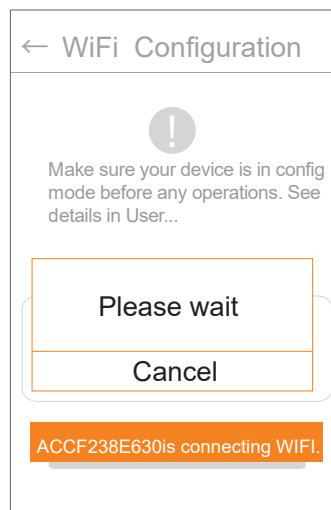

⑦ Wait for Wi-Fi settings.

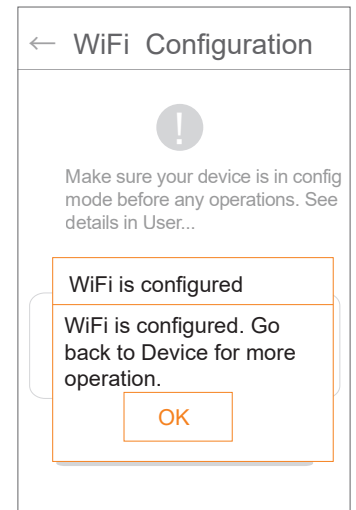

⑧ Click 'OK' to finish all WiFi configuration procedures.

5. If the configuration fails or you want to change to other WiFi network, please repeat steps 3. and 4. to re-configure.

6. When 'F' icon disappeared, WiFi is configured successfully.

7 Elitech Cloud

1. Login Cloud Portal

- Please type in this URL: www.i-elitech.com into any web browser to access the Elitech Cloud portal.
- Register and log into your account for more operations and functions.
- Click 'Help' from the Cloud Portal page to obtain more Cloud and App operation instructions.

2. Top up SIM card credit

If your device is SIM version, please top up your SIM card directly on our Elitech APP.

8 Technical specification

Power adapter	5V/1A
Temperature measuring range	-20℃ ~ + 70℃ (internal), -40℃ ~ +80℃ (external)
Temperature accuracy	±0.5℃
Temperature resolution	0.1℃
Humidity measuring range	0~100%RH
Humidity accuracy	±5%RH
Humidity resolution	1%RH
Memory capacity	32,000 points
Logging interval	5 minutes to 24 hours. Default interval is 30 minutes (@25℃)
Battery	Rechargeable lithium battery
Duration	Approximately 3 months at 1 hour upload
Protection level	Device with internal sensor: IP65; Device with external sensor: IP64
Sensor type	Internal: Temperature humidity combined sensor; External: Two-channel temperature sensor
LED indicator	Status indicator, Power indicator
Display	Segment display
Communication interface	GPRS(2G version)/4G(4G version)/WiFi(WiFi version)
Alarm mode	Buzzer, SMS from Cloud, mobile App
Buttons	Power ON/OFF button, Menu button



Elite of technology

Email: service@elitech.uk.com
Website: www.elitecheu.com