GK104 pro USB Wired + BT + 2.4g 3modes Keyboard

SKYLOONG®

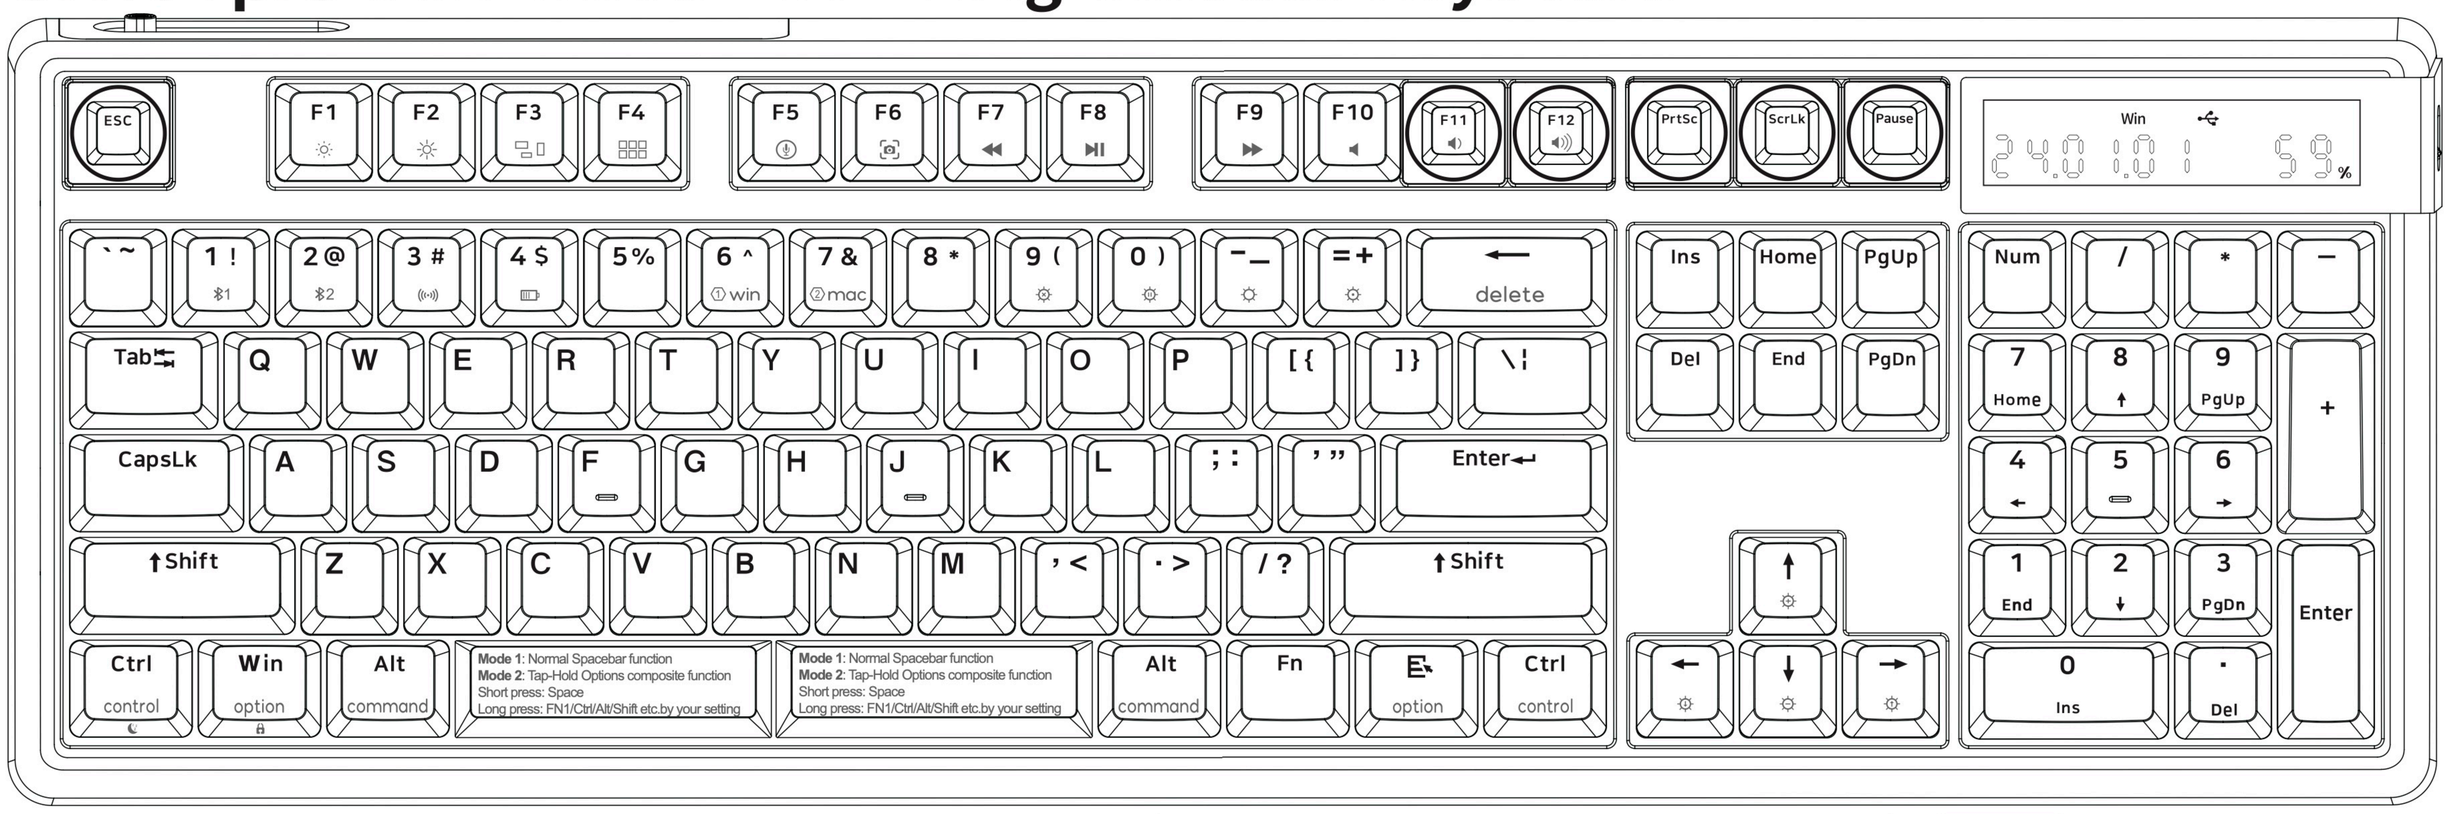

* The above keycap characters are for reference only. The FN additional function needs to be triggered with the FN key combination.

6.25U Space bar replacement accessories

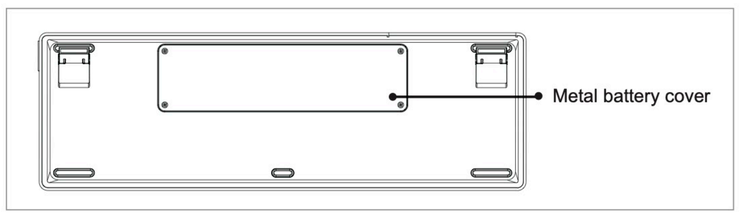



Knob/Switch Position
(Optional accessories, Up to 6 optional knob modules are available for the keyboard.)

Knob Function (Optional accessories)



Standard Knob Settings
1. Turn left : Volume –
2. Turn right : Volume +
3. Press: Mute



Knob function can be modified by the driver e.g.picture zoom in and zoom out
1. Turn left: Zoom –
2. Turn right: Zoom +
3. Press: ESC

Screen Module Component (Optional accessories)

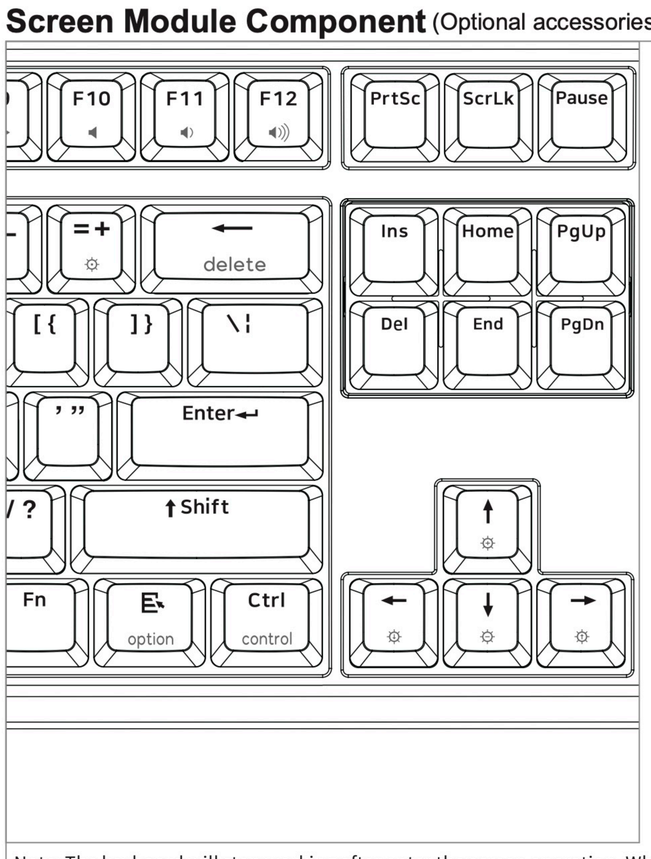

*The 6-switches and the screen can be interchanged.

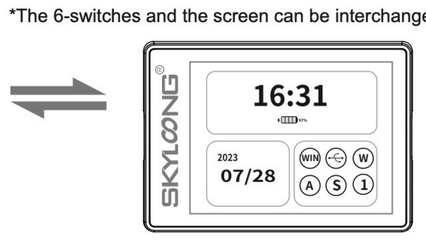

Screen operation:

Key	Function
FN + `~	Press: Picture/Gif or status display switching.
	Long press: Turn on/off the screen.
FN + Menu	Press and hold for 3 seconds to enter/exit the screen menu interface. If there is no operation for 3 minutes, it will automatically exit the menu interface.
↑	Menu cursor moves up.
↓	Menu cursor moves down.
←	Menu cursor moves left.
→	Menu cursor moves right.
Enter	Enter
Backspace	Return

Note: The keyboard will stop working after enter the screen operation. When the red light of the screen menu operation lights up, the screen menu can be operated! The keyboard resume work after quit the screen menu operation.

Digital Screen Function

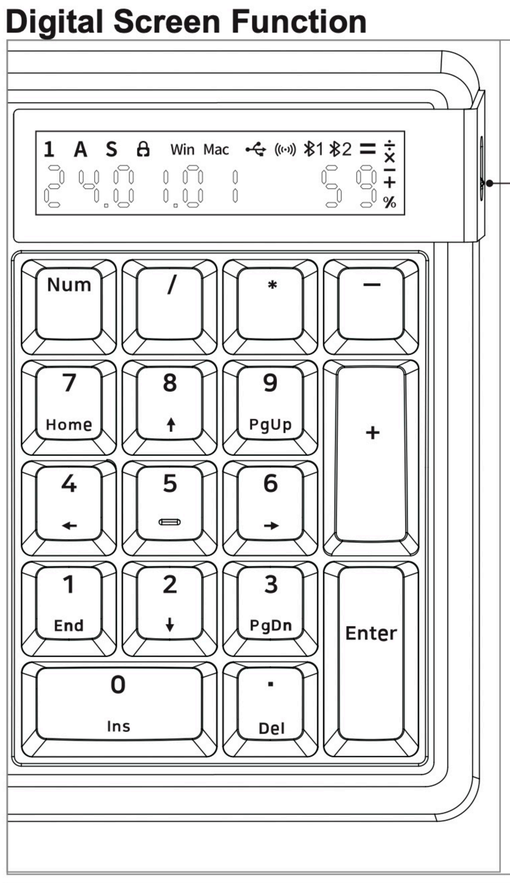

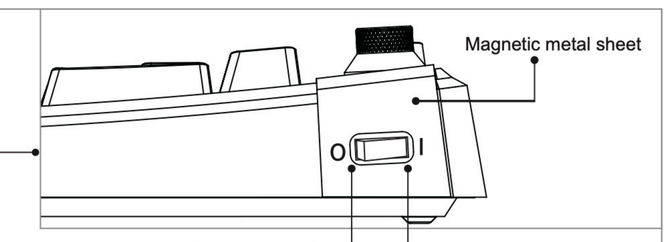

When the switch turn "O", the digital screen displays the time status. The number area is for normal use.

When the switch turn "I", the digital screen displays the calculator status. The number area switch to calculation function.

1、Time Settings (In time status)
FN + Num Press and hold for 3 seconds to enter time settings. Use the left and right arrow keys to select ,and the numbers will flash after selection. The up and down arrow keys can adjust the numbers.

2、Sound Effect Setting
FN + 0 (Number area) Voice broadcast
FN + + (Number area) Previous set of sound effects
FN + - (Number area) Next set of sound effects
Num Press once:Clear (Equivalent to the "C" key on the calculator)
Press twice:All-Clean (Equivalent to the "AC" key on the calculator)

Bluetooth and 2.4G:



USB Wired:



%:The flashing percentage sign indicates that charging is in progress. After charging is completed,the percentage sign is hidden and no longer blinks.

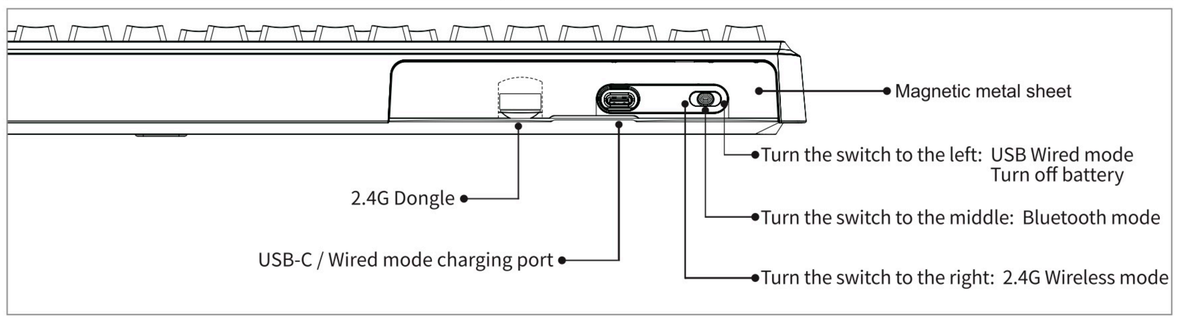

Backlight Setting (Can not modify)

Key	Function	Key	Function
FN + 9(	Backlight ON/OFF	FN + ↓	Backlight brightness –
FN + 0)	Light effect pause/play	FN + ↑	Backlight brightness +
FN + -_	Backlight mode 1-5 (Can be modified by driver)	FN + ←	Backlight effect speed –
FN + =+	Backlight mode 6-8	FN + →	Backlight effect speed +

Wirless Control (USB Wired keyboard do not have the function)

Key	Function
FN + 1!	Long press: The red&blue LED of 1! keycap will flash, The ✱1 bluetooth device can be paired.
	Press: The keyboard will connect the ✱1 BT device or disconnect.
FN + 2@	Long press: The red&blue LED of 2@ keycap will flash, The ✱2 bluetooth device can be paired.
	Press: The keyboard will connect the ✱2 BT device or disconnect.
FN + 3#	Long press: for 3 seconds, pairing 2.4g device, the LED of 3# key will flash while searching device, pairing search time is 20 seconds, the keyboard can be paired with a plugging dongle during 20 seconds. The 3# key shows green light when the keyboard is connected with dongle and then transits to current RGB effect after 2 seconds. The dongle is factory paired that can be used directly.
	Press: Connect or disconnect 2.4G mode during USB wired mode. No response without USB connection.
FN + 4$	Long press: turn off/turn on the charging indicator, low voltage alarm.
	Press: Z to ? key, electricity amount shows green 10%-100%from left to right.
FN + Space	In BT or 2.4g mode, Plug USB cable can quickly switch USB mode and wireless mode, easy to connect between multiple devices. It does not respond if there is no USB connection.

Note: If the Wireless pairing timed out or failed, please repair; if the bluetooth pairing is successful on the equipment, but the keyboard can not work still, Please delete this keyboard in the Bluetooth list, Turn off bluetooth of your PC or Mobile , restart the keyboard, and repair.

Mode Function Setting (User can modify the settings by the driver,download and save to the keyboard.)

Key	Win (can modify on layer 1)	Mac (can modify on layer 2)
F1	F1	Screen brightness – for Mac
F2	F2	Screen brightness + for Mac
F3	F3	for Mac
F4	F4	for Mac
F5	F5	One click call Siri for Mac
F6	F6	Screenshot for Mac
F7	F7	Previous
F8	F8	Play/Pause
F9	F9	Next
F10	F10	Mute
F11	F11	Volume –
F12	F12	Volume +
FN + 6^	Long press 3s switch to Win mode	
FN + 7&	Long press 3s switch to Mac mode	
FN + Backspace	Del	
FN + Win	Lock/Unlock Win key	
FN + L-Ctrl	Backlight and wireless sleep time settings: The flashing light of F1 means sleeping within 5 minutes, and F2 means 10 minutes...F9 means 45 minutes, and F10 does not sleep.	

Driver download address:
Win: http://www.jikedingzhi.com/downloadlist?driverID=103
Mac: http://www.jikedingzhi.com/downloadlist?driverID=90

Scan the QR code to download the Win driver.