

HSL'S 1U 6 ISOLATORS KIT

Includes HSL's PDUI 12 power distribution unit and 6 Isolators installed in a specially designed chassis for mounting in a network cabinet.

For redundancy, the 1U Isolator kit has a second power input and is designed to be used in mission-critical or data center applications.




RK-1U6-FI11PH-M

MODELS:

MODEL	DESCRIPTION
RK-1U6-FI11PH-M	6 DP/HDMI KVM Isolators 1U Metal Chassis Tray Kit
RK-1U6-FV11PH-M	6 DP/HDMI Video Isolators 1U Metal Chassis Tray Kit
RK-1U6-FI11H-M	6 HDMI KVM Isolators 1U Metal Chassis Tray Kit
RK-1U6-FV11H-M	6 HDMI Video Isolators 1U Metal Chassis Tray Kit
PDUI12M	Mini 12 Port 12v DC Junction Box



PDUI12M

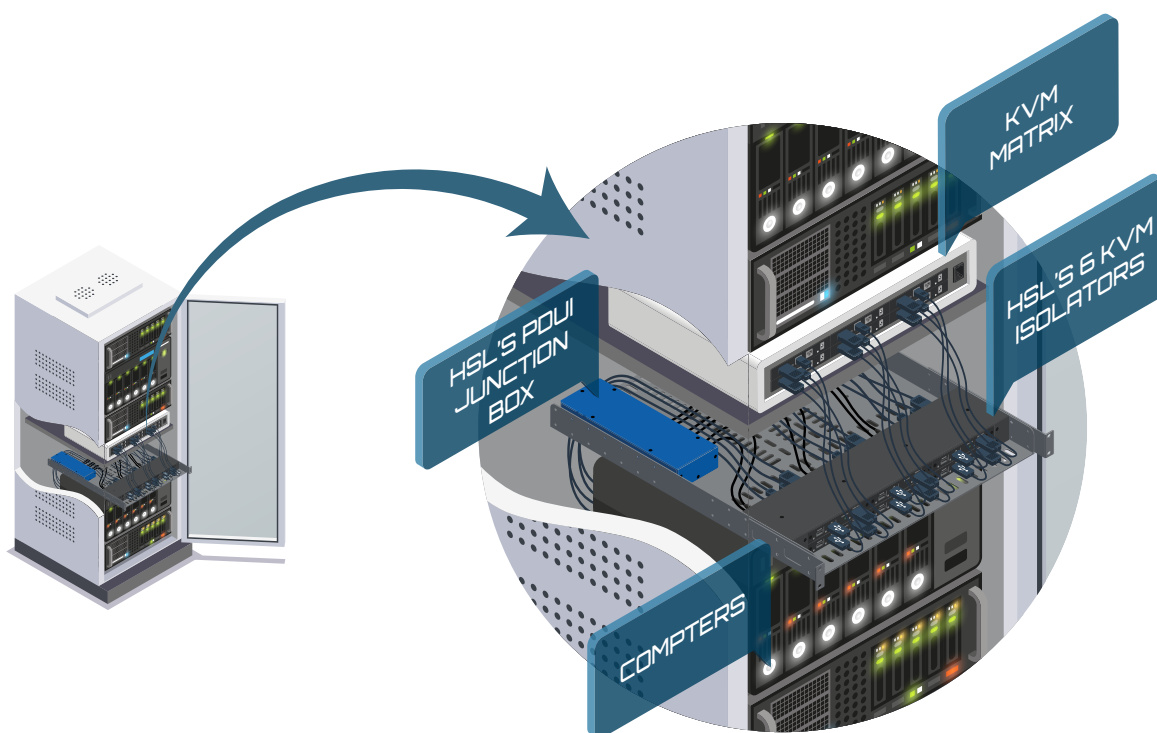

SPECIFICATION

PART NUMBER	RK-1U6-FV11PH-M	RK-1U6-FV11H-M	RK-1U6-FI11PH-M	RK-1U6-FI11H-M
CONSOLE PORTS				
Displays	6 x DP/HDMI	6 x HDMI 1.4	6 x DP/HDMI	6 x HDMI 1.4
Max Resolution (Input & Output)	3840x2160 @ 30 Hz	3840x2160 @ 30 Hz	3840x2160 @ 30 Hz	3840x2160 @ 30 Hz
Mouse and Keyboard	N/A	N/A	USB Type A	USB Type A
COMPUTER PORTS				
Display Type	6 x DP/HDMI	6 x HDMI 1.4	6 x DP/HDMI	6 x HDMI 1.4
Mouse and Keyboard	N/A	N/A	USB Type B	USB Type B
PHYSICAL				
Dimensions	550 x 448 x 44.3 mm / 21.6 x 17.6 x 1.7 inches			
Weight	5.5 kg / 12.12 lb			
POWER				
Power Requirements	Redundant 110V-220V AC-DC Power Supply			
ENVIRONMENTAL				
Operating Temperature	32° to 104° F (0° to 40° C)			
Storage Temperature	-4° to 140° F (-20° to 60° C)			
Humidity	20 to 80% non condensing; Storage – 10 to 90% non condensing			
SOFTWARE				
Supported OS	Windows, Linux, Mac			
GENERAL INFO				
Made In	ISRAEL			
Product life-cycle	10 years			
Warranty	2 Years			



RK-1U6-FV11PH-M



RK-1U6-FV11H-M



RK-1U6-FI11PH-M



RK-1U6-FI11H-M