


1. Exploded View & Part List

Exploded View

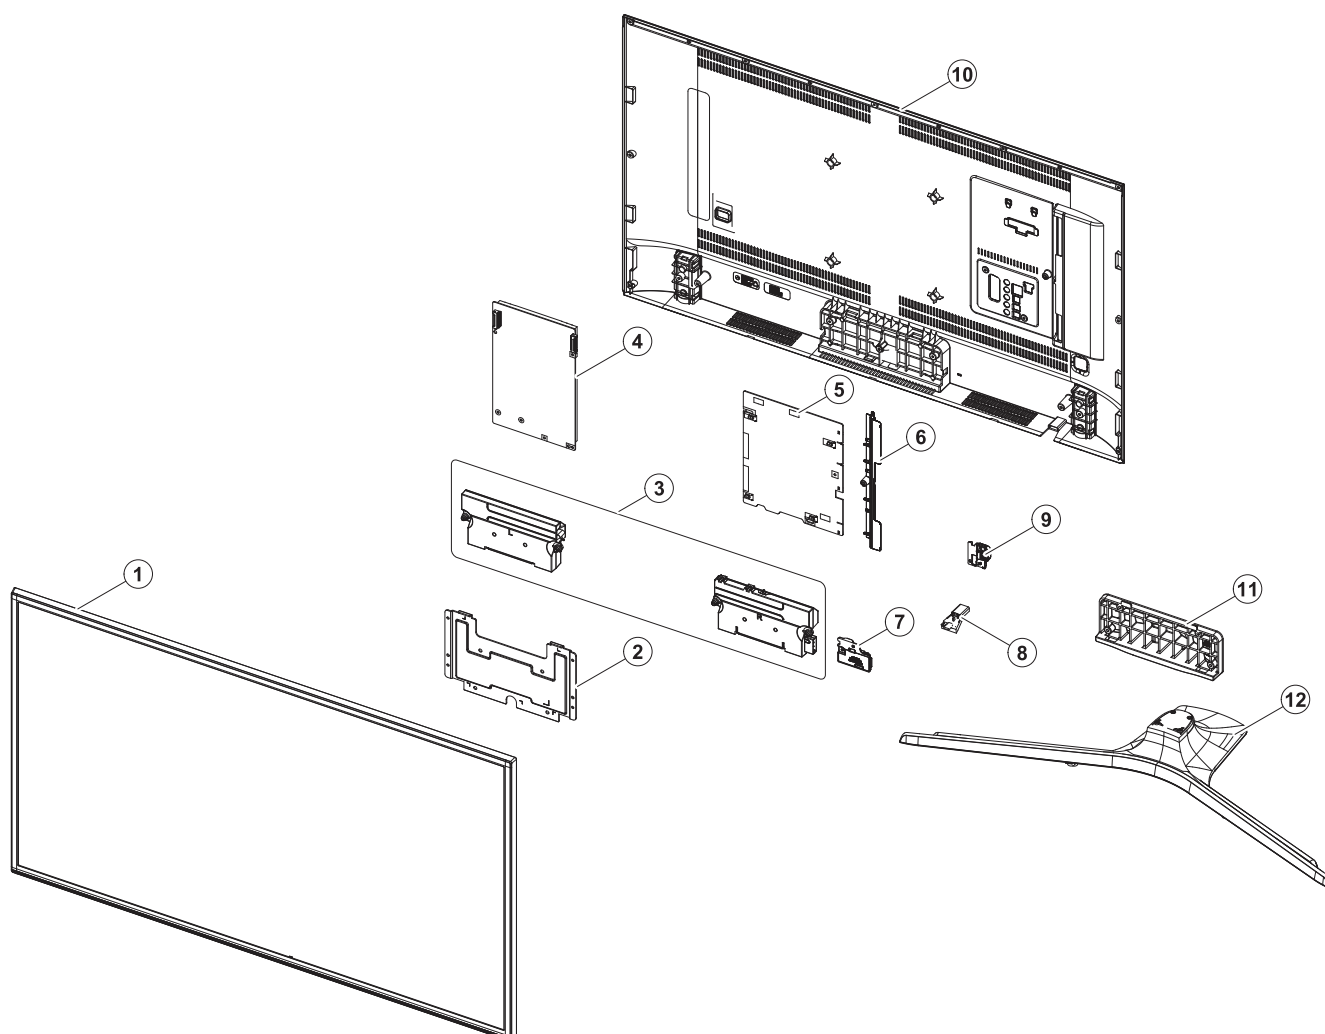

Parts List

No.	Lvl.	Loc.	Material Code	Description & Specification	SNA	Qty.
1	1	PANEL	BN95-02639A	PRODUCT LCD-SHARP; CY-GK060HGSV1V/H,KU600	SA	1
2	2	CB18	BN61-11517A	BRACKET-STAND LINK; HGI-SGHC,T2,NATURAL	SNA	1
3	2	SP01A	BN96-35006C	ASSY SPEAKER P-FRONT; TV-SPK,JU7000,6ohm,	SA	1
4	2		BN44-00808D	DC VSS-PD BOARD; L65S6N_FSM W,AC/DC,262W,	SA	1
5	2		BN94-10802D	ASSY PCB MAIN-SHARP; LEDTV 6K	SA	1
6	3		BN63-15236A	COVER-TERMINAL SIDE; 55KU6000,HIPS,MOLD,H	SA	1
7	2	WIFI	BN59-01174D	NETWORK-WLAN CLIENT; WIDT30Q,58x31.45x8.5	SA	1
8	2		BN96-39955A	ASSY BOARD P-IR FUNCTION; KU6000,IR ASSY_	SA	1
9	2	JOG	BN96-35345B	ASSY BOARD P-FUNCTION JOG; JU7500,CT15SE8	SA	1
10	2	R001A	BN96-39867D	ASSY COVER P-REAR; 60KU6000,PC+ABS+GF15%,	SA	1
11	2	SG01A	BN96-38553A	ASSY GUIDE P-STAND; 60JS6900,NORTH AMERIC	SA	1
12	2	SB02A	BN96-37971E	ASSY STAND P-BOTTOM; J6200 60",BN63-14511	SA	1

2. Electrical Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
			UE60KU6000KXXC (EA01)		
1	R001A	BN90-08002D	ASSY COVER REAR;LEDTV 6K	1	SNA
.2	SCREW	6001-003074	SCREW-MACHINE;BH,+,M3,L6,ZPC(BLK),SWRCH1	18	SA
.2	SCREW	6003-000003	SCREW-TAPTYPE;BH,+,-,B,M4,L10,ZPC(BLK),S	1	SA
.2	R001A	BN96-39867D	ASSY COVER P-REAR;60KU6000,PC+ABS+GF15%,	1	SA
..3	R001	BN63-15585A	COVER-REAR;60KU6000,PC+ABS+GF15%,MOLD,V-	1	SNA
...4		0103-010275	RESIN PC ABS;235GNH15/6919H,Black,BK0007	4320	SNA
..3		BN68-03518R	LABEL-STICKER CI SLOT;55KU6000,PET,T0.12	1	SNA
..3		BN68-07838A	INLAY-TERMINAL SIDE;55KU6000,PET,W15,T0.	1	SNA
1		BN90-08029D	ASSY W/I;LEDTV 6K	1	SNA
.2		BN81-08159Z	A/S PART SET-ELEC W/I;LED TV ELEC spec-C	1	SNA
.2		BN81-12184B	A/S PART SET-MECH W/I;UKU6000P,U60KP*	1	SNA
1	S001A	BN90-08063A	ASSY STAND;LEDTV 6K	1	SNA
.2	SB02A	BN96-37971E	ASSY STAND P-BOTTOM;J6200 60",BN63-14511	1	SA
..3	SCREW	6003-001001	SCREW-TAPTYPE;FH,+, -,B,M3,L8,ZPC(BLK),SW	2	SA
..3	AS080	BN63-04755H	SHEET-PROTECTION COVER;52LC530,PE,T0.05,	1	SNA
..3	AS080	BN63-04755L	SHEET-PROTECTION COVER;22LC350,PE,T0.05,	1	SNA
..3		BN63-14512B	COVER-STAND DECORATION;15Y J6200 60",PC+	1	SNA
...4		0103-005041	RESIN PC ABS;FR3200TV,901408,BK0008,1.2m	85	SNA
..3	RF01	BN67-00398P	FOOT-RUBBER;SILICONE,GRAY,T2.5	2	SNA
..3	SB02A	BN96-38154A	ASSY STAND P-BOTTOM;J6200 60",BN96-37971	1	SNA
...4	SCREW	6003-001119	SCREW-TAPTYPE;FH,+,S,M4,L10,ZPC(BLK),SWR	10	SA
...4	SCREW	6003-001355	SCREW-TAPTYPE;BH,+,S,M4,L20,ZPC(BLK),SWR	2	SNA
...4		BN61-12727A	BRACKET-STAND BOTTOM;HGI,T3,NATURAL	1	SNA
...4		BN61-12728A	BRACKET-STAND BODY;HGI,T1.9,NATURAL	1	SNA
...4		BN63-14511A	COVER-STAND TOP;15Y J6200 60",PC+ABS+GF2	1	SNA
...4	RF01	BN67-00398P	FOOT-RUBBER;SILICONE,GRAY,T2.5	3	SNA
...4		BN68-05603A	LABEL-E PASS;ART PAPER 90G,W/W	1	SNA
.2	SG01A	BN96-38553A	ASSY GUIDE P-STAND;60JS6900,NORTH AMERIC	1	SA
..3	SG03	BN61-12971A	GUIDE-STAND;JS6.9K_60,PC+GF20%,V-2,BK000	1	SNA
..3		BN68-05603A	LABEL-E PASS;ART PAPER 90G,W/W	3	SNA
..3		BN69-08751A	PACKING SHRINKAGE;STAND,PLASTIC OTHERS,P	0	SNA
..3		BN96-32380B	ASSY ACCESSORY-SCREW;BN69-10588A,BN61-09	1	SNA
...4	HOLDER	BN61-09494D	HOLDER-BOLT;BH+,SWRCH18A,BLACK,PRESS,B T	4	SA
...4		BN69-10588A	BAG SCREW;LDPE,0.05,70,90,TRP,LED TV,LDP	1	SNA
..3		BN96-38693A	ASSY ACCESSORY-SCREW;JS7200	1	SNA
...4		6902-002601	BAG SCREW;LDPE,T0.05*,W70,90,TRP,RECYCLE	1	SNA
...4	SCREW	BN61-09494B	SCREW-TAPTYPE;BH,+,S,M4,L14,ZPC(BLK),SWR	4	SA

Exploded Views and Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
1	M0017	BN91-17279D	ASSY CHASSIS;LEDTV 6K	1	SNA
2		BN94-10802D	ASSY PCB MAIN-SHARP;LEDTV 6K	1	SA
3		BN62-00817A	HEAT SINK-PS;55KU6000,A1050,T1.5,W115,L1	1	SNA
3		BN63-15236A	COVER-TERMINAL SIDE;55KU6000,HIPS,MOLD,H	1	SA
3		BN97-10648Q	ASSY SMD;LED TV 6K	1	SNA
4		0202-001899	SOLDER-CREAM;M705-GRN360-K2-VT,20-38um,S	4	SNA
4	DS01A	0401-001056	DIODE-SWITCHING;MMBD4148SE,100V,200mA,SO	1	SA
4		0403-001164	DIODE-ZENER;MMSZ5232B,5.32~5.88V,500mW,S	1	SA
4		0403-001783	DIODE-ZENER;BZB84-C6V2,5.8~6.6V,300mW,SO	3	SNA
4		0403-001831	DIODE-ZENER;KDZ12B,12~13.5V,1000mW,SOD-1	2	SA
4		0404-001307	DIODE-SCHOTTKY;SSC54,40V,5000mA,DO-214AB	1	SA
4		0404-001404	DIODE-SCHOTTKY;BAT721C,40V,200mA,SOT-23,	4	SA
4		0404-001640	DIODE-SCHOTTKY;SS1060HEWS,60V,1000mA,SOD	1	SA
4		0404-001881	DIODE-SCHOTTKY;SS3040-HE,40V,3000mA,SOD-	1	SA
4		0404-001953	DIODE-SCHOTTKY;MBRA340F-HAF,40V,3000mA,S	3	SA
4		0406-001200	DIODE-TVS;RClamp0504F,6V,1MAV,TP	2	SA
4		0406-001628	DIODE-TVS;AOZ8804ADI,6V,1MAV,5A,TP	1	SA
4		0406-001635	DIODE-TVS;SMF5.0A,6.4V,6.7V,7V,200MAV,20	1	SA
4		0406-001643	DIODE-TVS;1SMA33AT3G,36.7V,38.65V,40.6V,	1	SNA
4		0501-000002	TR-SMALL SIGNAL;KSA812,PNP,150mW,SOT-23,	1	SNA
4		0501-000445	TR-SMALL SIGNAL;KTC3875S-Y,NPN,150mW,SOT	7	SC
4		0502-001346	TR-POWER;FCX591A,PNP,1000mW,SOT89,TR,30/	1	SA
4		0504-000126	TR-DIGITAL;KSR1101,NPN,200mW,4.7K/4.7K,S	1	SA
4		0505-001844	FET-SILICON;SI4435DDY-T1-GE3,P,30V,-11.4	1	SA
4		0505-002560	FET-SILICON;AO6415,P,20V,-3.3A,0.15ohm,1	1	SA
4		0505-002598	FET-SILICON;AP2317GN,P,20V,-4.2A,0.052oh	1	SA
4		0505-002660	FET-SILICON;Si2308BDS,N,60V,2.3A,0.156oh	1	SNA
4		0505-002893	FET-SILICON;AO4801AS,P,30V,-5A,2W,SOIC-8	2	SA
4		0505-003205	FET-SILICON;DMG4435SSS-13,P,30V,-7.3A,1.	1	SA
4		0505-003391	FET-SILICON;AOD2922,N,100V,8A,140Mohm,18	1	SA
4		0505-003397	FET-SILICON;2N7002K,N,60V,0.38A,1.19ohm,	1	SA
4		0505-003507	FET-SILICON;AO3424,N,30V,3.8A,1.4W,SOT-2	5	SA
4		0801-003603	IC-CMOS LOGIC;MC74LCX244MN2TWG,Octal buf	1	SA
4		1001-001998	IC-ANALOG MULTIPLEX;NX3DV221GM,USB switc	2	SA
4		1103-001564	IC-EEPROM;S-24C512CI-J800,512Kbit,64Kx8,	1	SA
4		1105-002704	IC-DDR4 SDRAM;K4F8E304HB-MGCH,LPDDR4-SDR	2	SA
4		1201-000166	IC-OP AMP;LM358,SOP,ST,8P,150MIL,DUAL,10	1	SA
4		1201-003690	IC-AUDIO AMP;TAS5747PHPR,QFP,48P,DUAL,PL	1	SA
4		1203-004364	IC-VOL. DETECTOR;RT9818C-42PV,SOT-23,3P,	1	SA
4		1203-008102	IC-POS.FIXED REG.;S-13A1D12-E800,HSOP,8	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		1203-008104	IC-POSIFIXED REG.;S-13A1D18-E800,HSOP,8	1	SNA
...4		1203-008105	IC-POSIFIXED REG.;S-13A1D33-E800,HSOP,8	1	SNA
...4		1203-008319	IC-DC/DC CONVERTER;BM81233,QFN,32P,5x5mm	1	SNA
...4		1203-008391	IC-DC/DC CONVERTER;AOZ1269QI-02,QFN-23L,	1	SA
...4		1203-008392	IC-VOL. DETECTOR;S-6414AAB-L800X,TSOT-23	1	SA
...4		1203-008454	IC-DC/DC CONVERTER;TPS56528,HSOP8,8,4,89	2	SA
...4		1203-008522	IC-DC/DC CONVERTER;SN1501019DDCR,SOT-23,	2	SNA
...4		1203-008655	IC-DC/DC CONVERTER;BM81249MWW,QFN,56,7x7	1	SA
...4		1203-008732	IC-DC/DC CONVERTER;SYD104ADC,TSOT-23,6,3	1	SA
...4		1203-008733	IC-DC/DC CONVERTER;AOZ1236QI-02,QFN,23,4	2	SA
...4		1204-003697	IC-DECODER;SDP1531,FCPBGA,1046P,31x31,GL	1	SA
...4		1205-004822	IC-SWITCH;TPS22965DSGR,SON,8P,2x2x0.75mm	3	SNA
...4		1205-005325	IC-REPEATER;PS8409QFN48GTR2-A1,QFN,48P,6	1	SNA
...4		1205-005519	IC-SWITCH;ET20163,SOT23-5,5P,2.95x3.02mm	3	SA
...4		1405-001232	VARISTOR;6.4V,5.6Vdc,30A,1.6x0.8mm,TP,19	2	SNA
...4		1405-001271	VARISTOR;35V,20Vdc,5A,1.0x0.5mm,TP,100V,	15	SA
...4		1405-001381	VARISTOR;11V,8VDC,30A,1.6x0.8mm,TP,25V,5	2	SA
...4		1405-001382	VARISTOR;24.5V,16VDC,120A,2.0x1.25mm,TP,	1	SA
...4		2007-000039	R-CHIP;0ohm,1%,1/10W,TP,1608	7	SA
...4		2007-000043	R-CHIP;1Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000052	R-CHIP;10Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-000066	R-CHIP;20Kohm,1%,1/10W,TP,1608	1	SNA
...4		2007-000070	R-CHIP;0ohm,5%,1/10W,TP,1608	6	SA
...4		2007-000143	R-CHIP;4.7Kohm,5%,1/16W,TP,1005	16	SNA
...4		2007-000171	R-CHIP;0ohm,5%,1/16W,TP,1005	29	SNA
...4		2007-000173	R-CHIP;22ohm,5%,1/16W,TP,1005	3	SNA
...4		2007-000683	R-CHIP;3.3Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000726	R-CHIP;300ohm,1%,1/10W,TP,1608	3	SA
...4		2007-000736	R-CHIP;30Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-000932	R-CHIP;470ohm,5%,1/16W,TP,1005	3	SNA
...4		2007-000999	R-CHIP;510ohm,1%,1/10W,TP,1608	1	SA
...4		2007-001125	R-CHIP;68Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-001288	R-CHIP;18ohm,5%,1/16W,TP,1005	4	SA
...4		2007-001292	R-CHIP;33ohm,5%,1/16W,TP,1005	28	SNA
...4		2007-001298	R-CHIP;51ohm,5%,1/16W,TP,1005	11	SNA
...4		2007-007107	R-CHIP;100Kohm,1%,1/16W,TP,1005	14	SNA
...4		2007-007131	R-CHIP;13Kohm,1%,1/16W,TP,1005	4	SA
...4		2007-007132	R-CHIP;15Kohm,1%,1/16W,TP,1005	2	SA
...4		2007-007136	R-CHIP;4.7Kohm,1%,1/16W,TP,1005	66	SNA
...4		2007-007137	R-CHIP;1.2Kohm,1%,1/16W,TP,1005	3	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2007-007138	R-CHIP;27Kohm,1%,1/16W,TP,1005	3	SNA
...4		2007-007139	R-CHIP;47Kohm,1%,1/16W,TP,1005,T0.35	14	SA
...4		2007-007142	R-CHIP;10Kohm,1%,1/16W,TP,1005	34	SNA
...4		2007-007306	R-CHIP;100ohm,1%,1/16W,TP,1005	30	SNA
...4		2007-007309	R-CHIP;12Kohm,1%,1/16W,TP,1005,T0.35	1	SA
...4		2007-007310	R-CHIP;8.2Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-007312	R-CHIP;20Kohm,1%,1/16W,TP,1005	11	SA
...4		2007-007313	R-CHIP;6.8Kohm,1%,1/16W,TP,1005	4	SA
...4		2007-007318	R-CHIP;1Kohm,1%,1/16W,TP,1005	13	SNA
...4		2007-007334	R-CHIP;200Kohm,1%,1/16W,TP,1005	5	SNA
...4		2007-007488	R-CHIP;75Kohm,1%,1/16W,TP,1005	5	SNA
...4		2007-007517	R-CHIP;240ohm,1%,1/16W,TP,1005	6	SNA
...4		2007-007528	R-CHIP;1.5Kohm,1%,1/16W,TP,1005	5	SA
...4		2007-007720	R-CHIP;300Kohm,1%,1/10W,TP,1608	1	SA
...4		2007-007723	R-CHIP;75Kohm,1%,1/10W,TP,1608	2	SA
...4		2007-007766	R-CHIP;2Kohm,1%,1/16W,TP,1005	22	SNA
...4		2007-007767	R-CHIP;200ohm,1%,1/16W,TP,1005	7	SA
...4		2007-007798	R-CHIP;10ohm,1%,1/16W,TP,1005	8	SA
...4		2007-007847	R-CHIP;16Kohm,1%,1/10W,TP,1608	5	SA
...4		2007-007942	R-CHIP;1Mohm,1%,1/16W,TP,1005	1	SNA
...4		2007-007981	R-CHIP;180Kohm,1%,1/16W,TP,1005	1	SNA
...4		2007-008015	R-CHIP;75ohm,1%,1/16W,TP,1005	9	SNA
...4		2007-008263	R-CHIP;3Kohm,1%,1/16W,TP,1005	2	SA
...4		2007-008269	R-CHIP;51Kohm,1%,1/16W,TP,1005	3	SA
...4		2007-008298	R-CHIP;49.9ohm,1%,1/16W,TP,1005	4	SA
...4		2007-008391	R-CHIP;6.34Kohm,1%,1/16W,TP,1005	2	SA
...4		2007-008596	R-CHIP;0.1ohm,1%,1/4W,TP,3216	2	SC
...4		2007-008779	R-CHIP;0ohm,1%,1/16W,TP,1005	3	SA
...4		2007-009117	R-CHIP;49.9Kohm,1%,1/16W,TP,1005	1	SA
...4		2007-009322	R-CHIP;1.3Kohm,1%,1/16W,TP,1005	2	SA
...4		2007-009777	R-CHIP;4.99Kohm,1%,1/16W,TP,1005	2	SA
...4		2011-001261	R-NETWORK;33ohm,5%,1/16W,L,CHIP,8P,TP,2.	6	SA
...4		2011-001264	R-NETWORK;10ohm,5%,1/16W,L,CHIP,8P,TP,2.	8	SNA
...4		2011-001344	R-NETWORK;100ohm,5%,1/16W,L,CHIP,8P,TP,2	6	SA
...4	AD480	2203-000233	C-CER,CHIP;0.1nF,5%,50V,C0G,TP,1005	4	SA
...4	AD480	2203-000254	C-CER,CHIP;10nF,10%,16V,X7R,TP,1005	5	SA
...4	AD480	2203-000278	C-CER,CHIP;0.01nF,0.5pF,50V,C0G,TP,1005	2	SA
...4	AD480	2203-000359	C-CER,CHIP;0.15nF,5%,50V,C0G,TP,1005,0.5	3	SNA
...4	AD480	2203-000386	C-CER,CHIP;0.015nF,5%,50V,C0G,TP,1005	3	SA
...4	AD480	2203-000438	C-CER,CHIP;1nF,10%,50V,X7R,TP,1005	10	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4	AD480	2203-000489	C-CER,CHIP;2.2nF,10%,50V,X7R,TP,1005	3	SA
...4	AD480	2203-000585	C-CER,CHIP;0.22nF,10%,50V,X7R,TP,1005	3	SA
...4	AD480	2203-000812	C-CER,CHIP;0.033nF,5%,50V,C0G,TP,1005	5	SA
...4	AD480	2203-000838	C-CER,CHIP;0.39nF,5%,50V,C0G,TP,1608	1	SNA
...4	AD480	2203-000940	C-CER,CHIP;0.47nF,10%,50V,X7R,TP,1005	1	SA
...4	AD480	2203-002285	C-CER,CHIP;10nF,10%,50V,X7R,TP,1005	5	SNA
...4	AD480	2203-002398	C-CER,CHIP;22nF,10%,50V,X7R,TP,1608	1	SNA
...4	AD480	2203-005054	C-CER,CHIP;0.0047nF,0.25pF,50V,NP0,TP,10	2	SA
...4	AD480	2203-005083	C-CER,CHIP;220nF,10%,50V,X7R,TP,1608,0.8	6	SA
...4	AD480	2203-005249	C-CER,CHIP;100nF,10%,50V,X7R,TP,1608	4	SNA
...4	AD480	2203-005968	C-CER,CHIP;4.7nF,10%,50V,X7R,TP,1005,0.5	2	SNA
...4	AD480	2203-006048	C-CER,CHIP;100nF,10%,10V,X7R,TP,1005	8	SA
...4	AD480	2203-006126	C-CER,CHIP;47nF,10%,16V,X7R,TP,1005	3	SNA
...4	AD480	2203-006158	C-CER,CHIP;100nF,10%,16V,X7R,TP,1005,T0.	107	SNA
...4	AD480	2203-006324	C-CER,CHIP;2200nF,10%,10V,X5R,TP,1608	16	SA
...4	AD480	2203-006348	C-CER,CHIP;1000nF,10%,25V,X5R,TP,1608,0.	2	SA
...4	AD480	2203-006562	C-CER,CHIP;1000nF,10%,10V,X5R,TP,1005	27	SNA
...4	AD480	2203-006698	C-CER,CHIP;1000nF,10%,25V,X7R,TP,1608,0.	7	SNA
...4	AD480	2203-006824	C-CER,CHIP;4700nF,10%,10V,X5R,TP,1608	5	SNA
...4	AD480	2203-006838	C-CER,CHIP;2200nF,10%,6.3V,X5R,TP,1005	9	SA
...4	AD480	2203-006844	C-CER,CHIP;470nF,10%,10V,X5R,TP,1005	2	SA
...4	AD480	2203-006890	C-CER,CHIP;10000nF,20%,6.3V,X5R,TP,1608	29	SNA
...4	AD480	2203-007176	C-CER,CHIP;10000nF,10%,16V,X5R,TP,2012,1	23	SNA
...4	AD480	2203-007240	C-CER,CHIP;22000nF,20%,6.3V,X5R,TP,1608(	72	SA
...4	AD480	2203-007269	C-CER,CHIP;22000nF,20%,10V,X5R,TP,2012(2	13	SA
...4	AD480	2203-007270	C-CER,CHIP;10000nF,10%,10V,X5R,TP,1608,0	22	SNA
...4	AD480	2203-007306	C-CER,CHIP;10000nF,10%,25V,X5R,TP,2012,1	36	SNA
...4	AD480	2203-007544	C-CER,CHIP;100nF,10%,50V,X7R,TP,1005,0.5	37	SA
...4	AD480	2203-008315	C-CER,CHIP;22000nF,20%,25V,X5R,TP,2012,1	4	SA
...4		2402-001268	C-AL,SMD;100uF,20%,25V,WT,TP,8x6.3mm	1	SA
...4		2409-001240	C-ORGANIC,SMD;33uF,20%,25V,LR,TP,7343(1.	1	SA
...4		2409-001338	C-POLYMER ,CHIP;47uF,20%,6.3V,TP,3.2x1.6	1	SA
...4		2703-000213	INDUCTOR-SMD;470nH,10%,1.35Ohm,35mA,15,M	1	SA
...4		2703-001938	INDUCTOR-SMD;56nH,5%,1005,1.5Ohm,200mA,1	3	SA
...4		2703-003149	INDUCTOR-SMD;2.2uH,20%,0.055Ohm,3000mA,W	1	SA
...4		2703-003747	INDUCTOR-SMD;22uH,20%,6060,0.135ohm,1300	2	SA
...4		2703-003862	INDUCTOR-SMD;10uH,20%,6060,0.065ohm,1900	3	SA
...4		2703-003913	INDUCTOR-SMD;2.2uH,20%,2520,1.2T,0.116Oh	1	SNA
...4		2703-003937	INDUCTOR-SMD;1uH,20%,7.0x6.47x3.0mm,0.00	3	SA
...4		2703-004630	INDUCTOR-SMD;2.2uH,20%,5.0T,0.0025Ohm,66	1	SNA

Exploded Views and Parts List

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		2703-004724	INDUCTOR-SMD;8.2uH,20%,4T,0.072Ohm,2300m	4	SA
...4		2703-005191	INDUCTOR-SMD;1.5uH,20%,4.5,0.02Ohm,5300m	1	SA
...4		2703-005193	INDUCTOR-SMD;2.2uH,20%,4.5,0.024Ohm,5100	2	SA
...4		2703-005376	INDUCTOR-SMD;10uH,20%,10x10.7mm,4.0T,0.0	1	SA
...4		2801-004021	CRYSTAL-SMD;24.576MHz,20ppm,28-AAN,12pF,	1	SA
...4		3301-001364	BEAD-SMD;1000ohm,1608,TP,1085ohm/108MHz,	6	SNA
...4		3301-002039	BEAD-SMD;26ohm,1608,TP	32	SA
...4		3601-001374	FUSE-SURFACE MOUNT;32V,5A,FAST-ACTING,PL	3	SA
...4		3601-001376	FUSE-SURFACE MOUNT;32V,3A,FAST-ACTING,Hi	2	SNA
...4		3701-001967	CONNECTOR-HDMI;19P,A,FEMALE,AU,0.5mm,BLK	3	SA
...4		3707-001103	CONNECTOR-OPTICAL;ANGLE,SPDIF,2.5PI	1	SA
...4		3708-003241	CONNECTOR-FPC/FFC/PIC;96P,0.5mm,SMD-A,AU	2	SNA
...4		3710-003908	CONNECTOR-SOCKET;64P,2R,0.5mm,SMD-S,AU,B	1	SA
...4	EH01	3711-007803	HEADER-BOARD TO CABLE;BOX,12P,1R,1.25mm,	1	SA
...4	EH01	3711-008131	HEADER-BOARD TO CABLE;BOX,4P,1R,2.5mm,AN	1	SA
...4	EH01	3711-008859	HEADER-BOARD TO CABLE;BOX,12P,2R,2mm,ANG	1	SA
...4		3711-009090	CONNECTOR-HEADER;BOX,16P,1R,1.25mm,SMD-A	1	SA
...4		3722-003199	JACK-MODULAR;8P/8C,Y,ANGLE,NONE,AU,1PORT	1	SA
...4		3722-003457	JACK-USB;4P/1C,NI,BLK,ANGLE,A,2.0,13.1x1	2	SA
...4		3722-003814	JACK-PHONE;1P/7C,NI/SN,YEL,ANGLE,3.5PI,1	1	SA
...4	JACK	3722-003873	JACK-PHONE;1P/7C,AU/SN,BLU,ANGLE,3.5PI,1	1	SA
...4		6302-001376	GASKET-SMD;,,,CONDUCTIVE FABRIC,T14,W43,L	7	SNA
...4		BN40-00322C	TUNER-DTV AIR CABLE;CDT-933T322-93,DVB-T	1	SA
...4		BN41-02528A	PCB-MAIN;KU6000,FR-4,4L,1.6T,193x241mm,1	1	SNA
...4	CB07	BN61-13312B	BRACKET-PCB;55KS8000,SK5,0.3,13.7,11.4,S	4	SNA
...4		BN97-10863B	ASSY MICOM-SUB;JMMICOM_EU_TV,UWP60,W25Q4	1	SNA
....5		1107-002226	IC-NOR FLASH;W25Q40CLSSIP,4Mbit,SOIC,8P,	1	SA
...4		BN97-10865A	ASSY MICOM-MAIN;T-JZL6DEUC,UWP60,KLM4G1F	1	SNA
....5		1107-002374	IC-EMMC;KLM4G1FEPD-B031,4Gbyte,BGA,153P,	1	SNA
...4		BN97-10931A	ASSY MICOM;TCON,KU6k,60-SHP-Flat,W25Q80D	1	SNA
....5		1107-002339	IC-NOR FLASH;W25Q80DV,8Mbit,SOP,5.28x5.2	1	SNA
....5		BN46-00515A	S/W MICOM;Jazz M-L,TCON F/W	1	SNA
....5		BN46-00528A	S/W MICOM;K60H1U0F,SHARP,60H6AU**K,Flat	1	SNA
...3		BN97-10916A	ASSY DRM;JAZZ-L,DVB,NagSam, MAC, HDCP, C	1	SNA
...4		BN46-00109H	KEY CODE-CERTIFICATION;MAC,TV/AV,General	1	SNA
...4		BN46-00110P	KEY CODE-CERTIFICATION;MIRACAST(HDCP2.2)	1	SNA
...4		BN46-00500A	KEY CODE-CERTIFICATION;JAZZ-L,Nagra CSC	1	SNA
...4		BN46-00514A	KEY CODE-CERTIFICATION;CI PLUS,Jazz M, J	1	SNA
1		BN91-17311C	ASSY SHIELD;LEDTV 6K	1	SNA
.2	SCREW	6001-003081	SCREW-MACHINE;PWH,+,M3,L5,ZPC(WHT),SWRCH	9	SA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.2		BN39-02025G	LEAD CONNECTOR-POWER;UN65KU6000,Flat Con	1	SA
.2	16P	BN39-02030F	LEAD CONNECTOR-BLU;BLU(75JU6400),UL21016	1	SNA
.2		BN39-02218B	LEAD CONNECTOR-SUB ASSY;55KU6000, 60KU60	1	SA
.2		BN39-02220D	LEAD CONNECTOR-SUB ASSY;65KU6300,UL21016	1	SA
.2		BN44-00808D	DC VSS-PD BOARD;L65S6N_FSM W,AC/DC,262W,	1	SA
.2	WIFI	BN59-01174D	NETWORK-WLAN CLIENT;WIDT30Q,58x31.45x8.5	1	SA
.2		BN61-10073B	HOLDER-WIFI;55KU6000,ABS,MOLD,BK0007,HB	1	SNA
.2	CB18	BN61-11517A	BRACKET-STAND LINK;HGI-SGHC,T2,NATURAL	1	SNA
..3		BN61-09605A	STUD-PEM;LED TV F6100,SUM24L,L8	4	SNA
.2	SP01A	BN96-35006C	ASSY SPEAKER P-FRONT;TV-SPK,JU7000,6ohm,	1	SA
.2	JOG	BN96-35345B	ASSY BOARD P-FUNCTION JOG;JU7500,CT15SE8	1	SA
..3	AH240	BN61-11584A	HOLDER-BUTTON;JU7500,ABS,BK0007,HB	1	SNA
...4		0103-004609	RESIN ABS;HF-0680U,K21294,BK0007,HB,High	8	SNA
..3	AH297	BN63-11231B	HOLDER-KNOB;HU7000,ABS,BLACK,HB	1	SNA
..3	FK04	BN64-02406B	BUTTON-FUNCTION;HU7000,ABS,HB,BLK,HB	1	SNA
.2		BN96-39903A	FFC CABLE;60KU6000,Fold,L650,96P	1	SA
.2		BN96-39904A	FFC CABLE;60KU6000,Fold,L550,96P	1	SA
.2		BN96-39955A	ASSY BOARD P-IR FUNCTION;KU6000,IR ASSY_	1	SA
1		BN92-19848C	ASSY BOX;LEDTV 6K	1	SNA
.2		BH68-00662A	LABEL BOX;ALL,ART,90g,W60,L110,WHT,NO SI	1	SNA
.2		BN69-13441C	BOX UNIT;60KU6000,CB,DW3,F1,L1620,W160,H	1	SNA
1		BN92-19874B	ASSY LABEL;LEDTV 6K	1	SNA
.2		0203-001598	TAPE-FILAMENT;#8915,0.15,12,55000,CLR	0	SNA
.2		BN68-06708G	LABEL-RATING;Monitor,WW,PP,T0.161,W93,L7	1	SNA
.2		BN68-07519A	LABEL-ENERGY;ALL JORDAN,WW,PP,T0.135,W60	1	SNA
.2		BN68-07873A	LEAFLET-QUICK SETUP GUIDE;KU6000,EUROPE,	1	SNA
1		BN92-19938A	ASSY P/MATERIAL;LEDTV 6K	1	SNA
.2		6902-001955	BAG ROLL;HDPE/PE FOAM,HDPE T0.018mm,T0.2	3	SNA
.2		6902-002233	BAG AIR;LDPE,-,T0.2,W900,L1850,TRP,-,-,-	1	SNA
.2		6922-000003	BAND;PP,T0.8,W18,L1650M,TRP,DA69-90145A	1	SNA
.2		BN02-00319B	TAPE-OPP;OPP,T0.05,W75,L800m,CLEAR	4	SNA
.2		BN68-02422B	LABEL-WARNING;ALL,ART,T0.05,W240,L100,Wh	1	SNA
.2		BN69-03982H	PACKING ANGLE;EDGE,PAPER	1	SNA
.2		BN69-05418M	WRAP;T0.017,500,2000000,2000000,500	0	SNA
.2		BN69-06640B	PAD-SHEET;PAD,CB,SW4,,W910,L1290,,,,YEL	1	SNA
.2		BN69-06640E	PAD-PACKING;TRUCK PAD,CB,-,,W410,L2500,,	1	SNA
.2		BN69-12476N	PALLET-DP WOODEN;-WOOD,-,-,-,-,-,379	1	SNA
.2		BN69-13281A	CUSHION-SET;KU6000 60",EPS,16.7g/l,WHT,V	1	SNA
.2		BN69-13285A	CUSHION-SET SIDE;KU6000 60",EPS,16.7g/l,	1	SNA
..3		0103-005099	RESIN EPS;BASF303,Natural,Natural	938	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
.2		BN69-13462A	PAD-SHEET FRONT;60KS7000,CB,DW2,W751,L13	1	SNA
1		BN92-19965B	ASSY LABEL POP;LEDTV 6K	1	SNA
.2		BN68-07971B	LABEL POP-HIGHLIGHT;KU6000,PET,T0.1,W90,	1	SNA
1	ACCE1	BN92-20264S	ASSY ACCESSORY;LEDTV 6K	1	SNA
.2	ACCE4	BN96-35101A	ASSY ACCESSORY-MANUAL;LED_H6K	1	SNA
..3		6902-001964	BAG PE;LDPE,BIOBASED,T0.03,W200,L300,TRP	1	SNA
..3	T0527	BN68-00513A	LABEL-E PASS;ALL MODEL,WW,YUPO,W50,L15,W	2	SNA
..3		BN68-00514K	LEAFLET-WARRANTY;comm,Samsung,15Lang,W.E	1	SNA
..3		BN68-04972E	LEAFLET-REGULATORY GUIDE;ALL,SAMSUNG,W/W	1	SNA
..3		BN68-07598A	LEAFLET-FICHE;ALL,W/P,0	1	SNA
..3		BN68-07869B	MANUAL USERS;KU6000,XC,W/P	1	SNA
.2	ACCE2	BN96-39490A	ASSY ACCESSORY-CABLE;UK6P	1	SNA
..3		3709-001791	CONNECTOR-CARD SLOT;64P,0.5mm,SMD-A,AU,P	1	SA
..3	T0268	3903-000950	CBF-POWER CORD;DT,CEE,LP-21L,250V,2.5A,B	1	SA
..3		4301-000121	BATTERY-MN;1.5V,R03,10.5x44.5m,7.5g,AAA	2	SNA
..3		6902-001965	BAG PE;LDPE,BIOBASED,T0.05,W200,L300,TRP	1	SNA
..3	EC03	BN39-02189A	GENDER CABLE;DC to RCA Cable,3P,L100,UL2	1	SA
..3	EC03	BN39-02190A	GENDER CABLE;DC to RCA Cable,2P,L100,UL2	1	SA
..3		BN59-01247A	REMOCON-TV;2016 TV,Samsung,44KEY,3V,KU60	1	SA
1	PANEL	BN95-02639A	PRODUCT LCD-SHARP;CY-GK060HGSV1V/H,KU600	1	SA
.2	SCREW	6001-003075	SCREW-MACHINE;BH,+,M3,L4,ZPC(WHT),SWRCH1	4	SA
.2	AS080	BN63-07229A	SHEET-PROTECTION COVER;rose70",PET,T0.05	2	SNA
.2		BN68-05722A	LABEL-E PASS;POLYPROPYLENE,NON-COATING	1	SNA
.2		BN90-08169V	ASSY MISC-BLU;2016_LCM	1	SNA
..3		BN02-00102B	TAPE-FILAMENT;#8917,0.15,25,50,WHITE	0	SNA
..3		BN61-11508A	SUPPORT-PLATE;Y15 LED,PC,V-2,CLEAR,OD-19	22	SNA
..3		BN61-12745A	DIFFUSER PLATE;15Y_J7K 60INCH_DIFFUSER P	1	SNA
..3		BN61-13366A	FRAME-MIDDLE TOP;60KU6300,TPV,HB,BK0008	1	SNA
..3		BN61-13374A	FRAME-MIDDLE BOTTOM;60KU6300,TPV,HB,BK00	1	SNA
..3		BN61-13382A	FRAME-MIDDLE LEFT RIGHT;60KU6300,TPV,HB,	2	SNA
..3		BN63-13518A	OPTICAL SHEET-REFLECTOR;15Y JU7.0K 60inc	1	SNA
..3		BN63-14778A	OPTICAL SHEET-COMPLEX;15Y JU6.0K 60inch	1	SNA
..3		BN63-14779A	OPTICAL SHEET-MLS;15Y JU6K 60inch UTE23B	1	SNA
..3		BN96-35788C	ASSY CHASSIS REAR P;60KU6000,EGI SECC AG	1	SNA
...4		0203-006897	TAPE-DOUBLE FACE;SI,T1,W10,L50,WHT	1	SNA
...4	SCREW	6001-003075	SCREW-MACHINE;BH,+,M3,L4,ZPC(WHT),SWRCH1	1	SA
...4		BN02-00040C	TAPE DOUBLE FACE;F-LED ALL,PET,T0.3,W3,L	10	SNA
...4		BN02-00173B	TAPE PET;Y13 SNB F8K,PET,T0.05,W15,L40,B	1	SNA
...4		BN02-00173C	TAPE-OPP;PET,0.05,40,BLK	0	SNA
...4		BN61-09771A	HOLDER-SOURCE PCB;Y13 OLED CURVED 55",SW	1	SNA

Level	Loc.	Part Code	Description & Specification	Qty.	SA/SNA
...4		BN61-11407A	FRAME-CHASSIS REAR TOP;Y15 JU7K 60",PC+G	1	SNA
...4		BN61-11408A	FRAME-CHASSIS REAR BOTTOM;Y15 JU7K 60",P	1	SNA
...4		BN61-11409A	FRAME-CHASSIS REAR LEFT RIGHT;Y15 JU7K 6	2	SNA
...4		BN61-11836A	HOLDER-SOURCE PCB;Y15 JU7K INX,ABS,WHITE	8	SNA
...4		BN62-00690C	INSULATOR-SMPS;JU7500,PC,BLACK,L405,W255	1	SNA
...4		BN63-14962A	GASKET-EMI;GASKET,FABRIC,T8,W15,L5,BLACK	2	SNA
...4		BN63-15008A	GASKET-ESD;GASKET,FABRIC,T8,W20,L20,BLAC	3	SNA
...4	CC04	BN64-02866B	CHASSIS-REAR;EGI-SECC,SECC-AG	1	SNA
....5		BN61-11982B	HOLDER-WALL RIVET;55KS7000,CR-SPCC,EXTRU	4	SNA
...4	T0527	BN68-00513A	LABEL-E PASS;ALL MODEL,WW,YUPO,W50,L15,W	1	SNA
...4		BN74-00053J	TAPE-PAPER;PAPER,3M2307,T0.14,W25,ROLL,W	0	SNA
...4		BN96-34711A	ASSY PCB P-LED INTERFACE BOARD;60JU6400,	1	SNA
..3		BN96-39663A	ASSY LED BAR P;60inch_KU6000_Sharp_L,CEM	8	SNA
..3		BN96-39664A	ASSY LED BAR P;60inch_KU6000_Sharp_R,CEM	8	SNA
..2		BN96-35019B	ASSY COVER P-SOURCE PCB LEFT;60KU6000,EG	1	SNA
..3		BN63-13206B	COVER-SOURCE PCB LEFT;60KU6000,EGI-SECC,	1	SNA
..3		BN63-15734A	INSULATOR-SOURCE PCB COVER LEFT;60KU6000	1	SNA
..2		BN96-35597E	ASSY CHASSIS FRONT P;60KU6300,PC+ABS+MF1	1	SNA
..3		BN02-00381S	TAPE CONDUCTIVE;Y15 UHD Flat 60",CONDUCT	2	SNA
..3		BN02-00381T	TAPE CONDUCTIVE;Y15 UHD Flat 60",CONDUCT	2	SNA
..3		BN60-00715A	SPACER-CONDUCTIVE;Y13 Slim F-LED,CONDUCT	2	SNA
..3		BN60-01115A	SPACER-CONDUCTIVE;Y15 JU8K,CONDUCTIVE FA	3	SNA
..3	FD01	BN63-13308E	COVER-DECORATION;JU6000 60IN,ABS+PC+MF17	1	SNA
..3		BN63-14373E	SHEET-PROTECTION COVER;AL,T0.068,W33,ROL	5	SNA
..3	AC155	BN64-03412A	CHASSIS-FRONT;PC+ABS+MF15%,V-1,V1	1	SNA
..2		BN96-36283B	ASSY COVER P-SOURCE PCB RIGHT;60KU6000,E	1	SNA
..3		BN63-13207B	COVER-SOURCE PCB RIGHT;60KU6000,EGI-SECC	1	SNA
..3		BN63-15725A	INSULATOR-SOURCE PCB COVER RIGHT;60KU600	1	SNA
..2		BN96-39208A	ASSY OPEN CELL;LQ601R3HB2K,16:9,12	1	SNA
..3		BN81-11329A	A/S-POLARIZER TFT;LQ601R3HA5K,PFILV2044T	1	SNA
..3		BN81-11340A	A/S-POLARIZER CF;LQ601R3HA6K,PFILV2043TP	1	SNA
..3		BN81-12843A	A/S-IC DRIVER GATE;SHARP 60inch UD 120Hz	1	SNA
..3		BN81-12845A	A/S-ASSY PCB-SOURCE LEFT-RIGHT;SHARP 60i	1	SNA
..3		BN81-12846A	A/S-ASSY PCB-SOURCE LEFT-LEFT;SHARP 60in	1	SNA
..3		BN81-12847A	A/S-ASSY PCB-SOURCE RIGHT-LEFT;SHARP 60i	1	SNA
..3		BN81-12848A	A/S-ASSY PCB-SOURCE RIGHT-RIGHT;SHARP 60	1	SNA
..3		BN81-13134A	A/S-IC DRIVER SOURCE;IC DRIVER SOURCE,VH	1	SNA