



BASKETBALL HOOP MANUAL



www.explodehoops.com

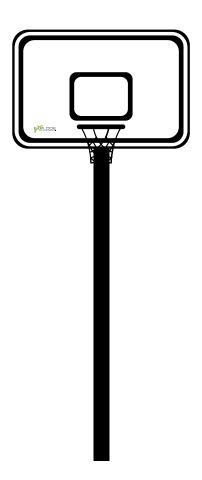

PARTS

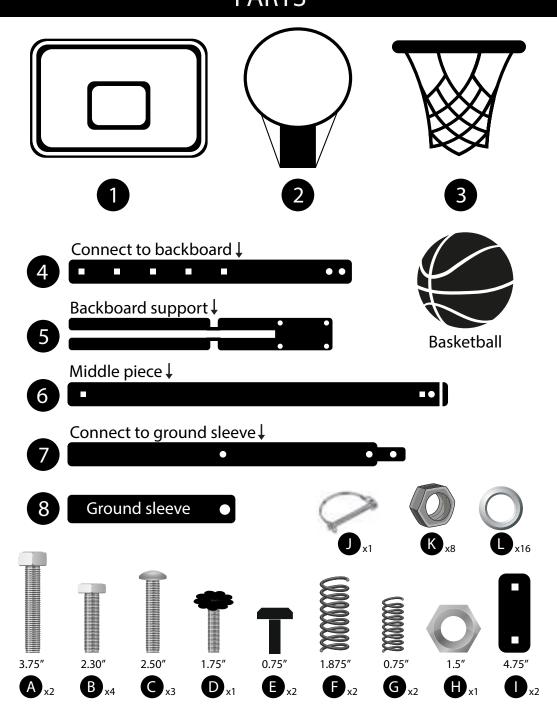

Installing your ground sleeve


A complete installation video is available at www.explodehoops.com or scan the code to be taken directly to the page.









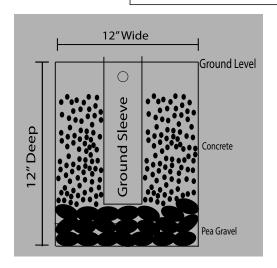


STEP 1:

Dig a hole approximately 12" deep x 12" wide. Fill the first part of the hole with pea gravel.

Once the hole is finished and the pea gravel has been placed, place the sleeve (8) vertically in the hole and fill around the sleeve with dry concrete powder for the rest of the hole. Next, add water to the dry mix. BE SURE TO NOT COVER THE GROUND SLEEVE HOLE WITH CONCRETE. Stop the concrete mixture below the hole.

You will need apx 2 bags of 50 lbs concrete to fill around your ground sleeve (8).

BASE

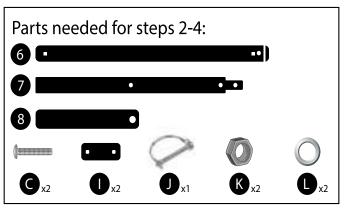

STEP 2:


Place part (7) into the sleeve (8) and secure with locking pin (J) through holes. Place a level on all sides of the pole to ensure it is perpendicular. More information on this can be found on the installation video found on our website.

Make sure to do this while the concrete is wet to allow for adjustments.

Allow the concrete to cure for 24 hours before continuing install.

STEP 3:

Attach parts (6) & (7).



STEP 4:


Secure part (I) on both sides of connected parts (6) and (7) using two included (C) screws, two (K) nuts, and two (I) washers.

 $\overline{7}$


(8)

 $\widehat{7}$

8




Backboard

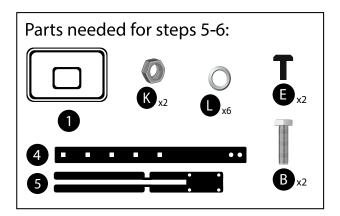



STEP 5:

Slightly bend part (5) to line up holes with backboard and reach desired angle.



Connect bent (5) piece to back of backboard (1) using two (E) screws and two (L) washers.

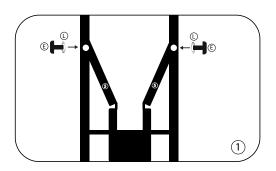





STEP 6:

Screw two (B) screws through the side of piece (5) and through piece (4) using four (L) washers and two (K) nuts.

Backboard to hoop

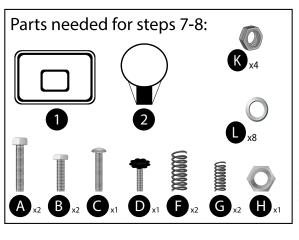


- (A) screws on top 2 holes *larger screws*
- (B) screws on bottom 2 holes *smaller screws*



STEP 7:

Screw pieces (1) and (2) using two (A) and two (B) screws, two (F) and two (G) springs, eight (L) washers, and four (K) nuts.

STEP 8:

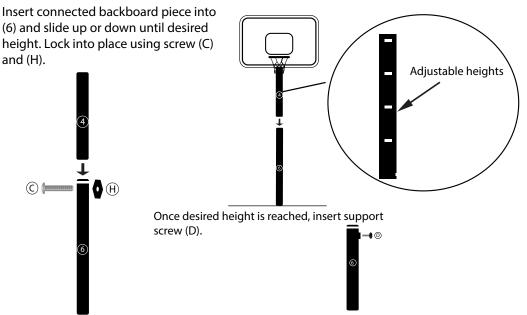

Net

