



Dekala Blackstar™ Smart Night Light Alarm Clock

(SNA006S)

Instructions

Please read the instructions carefully before use and keep it with proper storage

(0/14)

- Scan QR Code to Download User Manual -




CONTENTS

Elements	01
Controls	01
Feature Description	02
App Guidance	02
Voice Control	07
Usage	09
Specification	13
FAQ	13
Notes	14


Elements



Front view

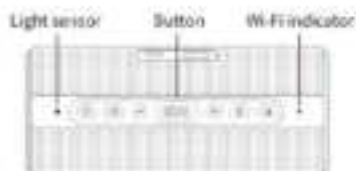

Top view



Back view



Back perspective view

Controls



- Light sensor (do not cover)
- Alarm Clock
- +/- Select
- Sleep/Night Light
- Setting
- Sleep-aid
- Wi-Fi indicator
(Hold "+" and "-" at the same time to reset Wi-Fi)

Feature Description

- A smart product that functions as an alarm clock and amber night light with sleep-and mode and white noise.
- The chic triangular look gives the best viewing angle of 20.1°.
- Large 5-inch screen time display (2 inches per character, time-display visibility/brightness) is adjustable from level 1 to level 3 (can also be completely hidden if wanted too). Brightness automatically changes according to ambient light under Auto-Mode. Making sure it's always suitable for every occasion in your life.
- Unique design on both sides to reflect the amber light, adjustable brightness between level 1 to 10, giving you the soft warm lighting.
- Painted metal mesh not only brings a firm feel, but also makes the amber lights softer and more comfort for your eyes.
- Two separate sets of alarm clocks with six natural sounds can be set according to the working day or the rest day.
- The sleep mode allows you to fall asleep under soft light and pleasant white noise with the light and sound automatically turned off.
- Automatic time calibration when connecting to Wi-Fi (within local time zone, DST auto-calibration supported). Time-Display system can be switch between duodecimal hour system (12-hour clock) and military time (24-hour clock).
- App remote control, freely turn on/off your alarm clock as well as enter all settings in detail on your smartphone (iOS and Android both available).
- Voice control, supports Amazon Alexa and Google Home, makes your already smart lifestyle even smarter!

App Guidance

Wi-Fi Setup

Download APP

Download "Smart Life" from App Store /Google Play or Scan the QR code, sign up and log in.




Attention: Turn on GPS location, Wi-Fi (2.4 GHz only) and Bluetooth before connecting device to your Wi-Fi (2.4 GHz only), then you can choose auto-search and connect or manually connect.

Wi-Fi connecting mode

① Plug in to power, the flashing "Wi-Fi" indicates the device is now under Wi-Fi connecting mode;

② If the "Wi-Fi" stays solid, Long-press "+" at the same time (i.e. "Wi-Fi" flashes to enter Wi-Fi connecting mode).

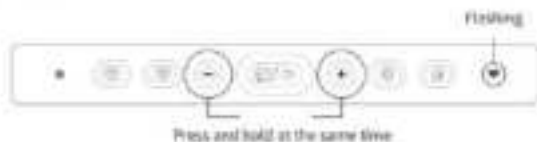

Connect device to App

App auto-search and connect

① Open up "Smart Life" app, click "➕";

② Click on "Go to add";

③ Select the device you want to connect with "Smart Life" app and click "➕" on the right.



⑥ Type in 2.4 GHz (Wi-Fi) password and click on "Next" (make sure the smartphone and Smart Life app are both connected to 2.4 GHz Wi-Fi).

⑦ Put the device, your smartphone and the router in the same area when connecting (as timely as possible).

⑧ You can re-name the device after it successfully connects to your 2.4 GHz Wi-Fi, click on "Done" to complete the Wi-Fi setup process. When "Wi-Fi" stays solid and lighted, it means that the device is currently connected to Smart Life App and your Wi-Fi.



App setting page

1.Blackstar™ home page



2. Alarm clock setting

Take Alarm clock 1 as a demonstration:

① You are able to activate/deactivate both alarm clocks (Alarm clock 1 and Alarm clock 2) from the Blackstar™ home page.

② Tap "Alarm 1" section to enter "Alarm 1" setting page, the device will auto-save all your customized settings.

③ During the alarm ringing, Click "Stop" on the Blackstar™ home page to completely turn off the alarm; click " Snooze" to turn on snooze mode (stop ringing for 3 minutes to give you a short nap).



3. Sleep-aid setting

① You are able to activate/deactivate "Sleep-aid" mode from the Blackstar™ home page.

② Tap "Sleep-aid" section to enter the "Sleep-aid" setting page, the device will auto-save all your customized settings.



4. Night Light setting

- ① You are able to turn on/off Night Light from the Blackstar™ home page.
- ② Tap "Night Light" section to enter "Night Light" page, adjust the brightness level.



5. Other setting

Click "⌵" in the upper right corner to enter, on this screen you can view device information, third party control guidelines, offline notification, remove the device and so on.



Voice Control

Take "Alexa" connecting setup as an example:

Additional: make sure SNA0085 is already linked with the Smart Life App.

① Download "Amazon Alexa" from Google Play/App Store and sign up. (If you are already an Alexa user, you can just open it)

② Choose Skills & Games, search Smart Life and enable Smart Life.




③ Log in with the user name and password registered in the "Smart Life" APP, and authorize Alexa to obtain relevant information. When the authorization successfully displays "Smart Life has been successfully linked", you can use the Echo speaker to control Dekang Blackstar™ Alarm Clock.



⑤ Open Smart Life App to check if the third-party control has linked, if it shows yes, it means the two accounts has linked up on cloud. You can rename the device with Smart Life App and Alexa will automatically synchronize the new name via cloud.

Attention: You can also have Alexa to discover new device and repeat the linking process to re-link with the re-named device via Smart Life App (only an optional operation).

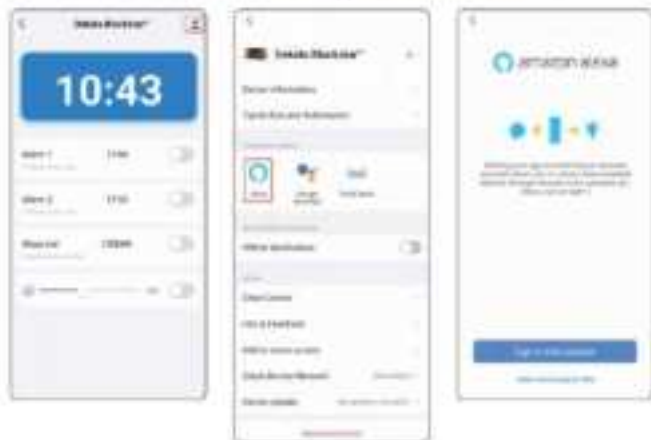

Voice control

You can re-name all the functions of SQA0005, Alexa will sync with the new names and recognize them as voice commands.

Works with Alexa / Google smart home.

Attention: Minor delay might occur due to various Wi-Fi speed and cloud processing system, when device or Alexa fail to react to voice control, please wait for a few minutes and try again.

Here are some commands to try

"Alexa, Turn on/off the light"

"Alexa, Set/Change Light to 20%"

"Alexa, Open/Close the curtain"

"Alexa, Open/Close the sleep"

Usage

Set the functions

1. Manual time-setting

① Plug in to power, long press "⏻" to enter manual time-setting;



② Press "+" / "-" to select the correct minute, press "⏻" apply and continue;



③ Press "+" / "-" to select the correct hour, press "⏻" apply and continue;





④ Press "+" / "-" to select the desired Time-Display system(12H or 24H), press "⏻" to confirm and complete time setting.



Attention: During the connecting process, if there is no action within 15 seconds, device would resume to its home screen.

2. Time-Display visibility control

Press "⏻" to select the visibility Day/Night/Close/turn off the Time-Display, you can do the same thing on the Smart Life App.



* In auto mode, the brightness will change automatically with the environment light.

Please do not cover the light sensor "●".

Alarm Clock

1. Turn on/off alarm

① When the device is under Time-Display page, press "**⏰**" / "**⏰**" to activate Alarm clock. The digits flashes for 3 seconds to show the preset alarm time, the alarm clock icon stays solid;

② Press "**⏰**" / "**⏰**" to deactivate the alarm clock, the corresponding alarm clock icon fades.

Attention: 1. The two sets of alarm clocks are set within the same process;

2. Device can set work-day alarms and weekend alarms separately via SmartLife App.

2. Alarm setting (take alarm 1 as demonstration)

① Under Time-Display page, long-press "**⏰**" till Time-Display page flashes to enter alarm setting mode;

② Press "**+**" / "**-**" to select the correct hour; press "**⏰**" to apply and continue;



③ Press "**+**" / "**-**" to select the correct minute; press "**⏰**" to apply and continue to alarm sound selecting;

④ Press "**+**" / "**-**" to select alarm sound (S-01 to S-06); press "**⏰**" to apply and continue to volume level selecting;



⑤ Press "**+**" / "**-**" to select the alarm sound volume (U-01 to U-10); press "**⏰**" to confirm and complete alarm clock setting.



Attention: During the setting process, if there is no action within 15 seconds, device would resume to its home screen.

Snooze

① During the alarm beeping, press "**⏸/⏹**" to turn on snooze mode (alarm-sound pauses for 9 minutes). You can turn on snooze mode repeatedly up to 5 times per each preset alarm.



② During the alarm beeping (or under the snooze mode), press the corresponding alarm button to exit snooze mode and completely turn off the alarm.



Attention: the alarm goes automatically turned off after 30 minutes of beeping without any operation on the device.

Night light

(Adjust via APP after Wi-Fi Setup; go to the APP for details.)

① Plug in to power; press "**⏸/⏹**" to turn on the night light.



② Press "**+/-**" to select desired brightness (L-01 to L-010).



③ Press "**⏸/⏹**" again to turn off the night light.



Sleep-aid mode

1. Activate/Deactivate sleep-aid mode

When the device is under Time-Display page, press " " to activate/deactivate sleep-aid mode. The sleep-aid mode button light stays on in sleep-aid mode.



2. Sleep-aid setting


1 When the device is under Time-Display page, long press " " All Time-Display page flashes to enter sleep-aid setting mode;



3 Press ""/" " to select sleep-aid sound (S-01 to S-04), press " " to apply and continue to volume level selecting;



4 Press ""/" " to adjust brightness level (L-01 to L-10), press " " to confirm and complete sleep-aid setting.



2 Press ""/" " to set sleep-aid duration (from 5 to 120 minutes), press " " to apply and continue to sleep-aid sound selecting;



4 Press ""/" " to select sleep-aid sound volume (V-01 to V-08), press " " to apply and continue to night light brightness level selecting;



Attention: During the setting process, if there is no action within 15 seconds, device would return to its home screen.

Specification

Model	SNA0005
Size	200 x 85 x 37.5mm
Weight	405g
Color	Black
Material	ABS+PC, Silica gel, Metal
Communication mode	Wi-Fi (2.4G) + BLE module
Control mode	Button control, APP control, Voice control (Connect to third-party smart speaker)
Input	Micro USB - adapter 5V 3A
Output	USB A Output 5V 1A
Speaker	4W 3W
Packing list	Dekala Blackbox Alarm Clock, User guide, Adapter, Charging cable
Certification	    

FAQ

1. The device cannot be connected?

- 1) Please put the router, device and mobile phone in the same area (as closely as possible);
- 2) Please make sure your Wi-Fi signal is strong or usable at least (only 2.4GHz Wi-Fi network is supported);
- 3) To connect to a different smartphone or Wi-Fi network, please long-press "/ " at the same time to re-enter Wi-Fi connecting mode.

2. App suddenly loses control over the device?

- 1) Please make sure that the device is powered on;
- 2) Check the strength of the Wi-Fi signal (open a random web page as testing) and whether the device and your smartphone are connected under the same Wi-Fi (2.4GHz only);
- 3) Re-open Smart Life app and try again.

3. How to reset Wi-Fi connection on the device?

Long-press "/ " at the same time till the "" flashes to enter Wi-Fi connecting status.

* Resetting Wi-Fi will remove the connected device and the setting.

4. Changes in setting on App don't sync with the device?

- ① Check the Wi-Fi connection between the device and your smartphone and the strength of Wi-Fi signal (open a random web page as testing)
- ② Re-open Smart Life App and try again.

5. Smartphone loses control over the device when under separated locations(different Wi-Fi)?

- ① Check the strength of Wi-Fi signal(open a random web page as testing), and make sure the device and your smartphone are connected under the same Wi-Fi (2.4GHz only)
- ② Re-start the router and try connecting the device and your smartphone via Smart Life App again (under the same Wi-Fi 2.4GHz only)

6. Other issues

If issues still occur under the instructions above, please go to the Blackstar™ home page on Smart Life app and click "Z" at the top right and select "FAQ & Feedback", then tap "Unresolved/Send Feedback" to submit your issue, and feel free to contact us by E-mail at info@dekastore.com, our troubleshooting team will get back to you ASAP.

Notes

- Please wipe this product with a soft cloth.
- Do not scrub this product with abrasive cleaning agents, rough chemicals, alcohol, acetone, cleaning agents, etc., so as not to damage the surface of the product.
- Store the product in a safe, dry place that will not be overstocked, bruised or damaged.
- Do not wrap the power cord around the appliance when storing the product.
- Please use the attached power adapter (5V/2A) to avoid damage to the equipment.
- Please use the product under the instructions. Disassembly and collision on the product are strictly prohibited and will void the warranty.
- Please place the product on stable, flat surface when using.
- Do not use it in high-temperature, humid or corrosive environment, so as to avoid leakage caused by circuit damage.
- Although the product is family friendly, to reduce the risk of electric shock, be careful with the children in present when using the product.
- This product is not fireproof, please do not throw it into the fire, do not go near the source of fire.
- This product is not waterproof, please do not put it into the water, so as not to damage the equipment.

Feel free to contact us if you need further assistance,
our troubleshooting team will get back to you ASAP.

Official Website : www.dekastore.com

Email: info@dekastore.com