

Wireless HDMI Transmitter and Receiver Cable



Introduction:

Our new wireless HDMI transmitter and receiver were designed in a cable shape for plug-and-play. One end features an HDMI port with TX/RX function, while the other end has a USB port for charging. It functions like a traditional HDMI cable, but with the added benefit of wireless long-range streaming of 1080P video and audio from devices such as laptops, PCs, cameras, and cable boxes to TVs and monitors. With a transmission range of up to 90 feet, it's perfect for home entertainment or work. Experience minimal latency and seamless connectivity with our wireless HDMI transmitter and receiver.

Specification:

- 1.Power Input: 5V/1A
- 2.Wifi: 5Ghz
3. Maximum Video Resolution: 1920X1080 @60Hz.
- 4.Transmission Distance: up to 90 FT in open space.
5. Length: 2.52 feet /77cm (one cable length)

Package Included:

- 1.Transmitter Cable (Computer)*1
- 2.Receiver Cable (TV/Monitor)*1
- 3.Storage Bag*1
- 4.User Manual*1

Contact Way:

Technical support email: Support@Aimibo.tv


Website: <https://aimibo.tv>

Whatsapp:




Product Overview

Transmitter

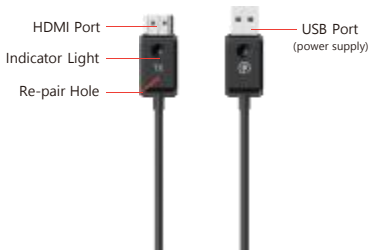

Receiver

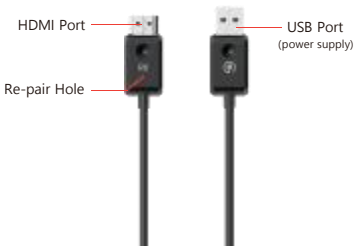

How to install?


- 1 Connect the receiver to the HDMI port on your TV/monitor/projector, and power it on via a separate 5V/1A power adapter.



- 2 Connect the transmitter to the HDMI port on your laptop/PC, and power it on via a separate 5V/1A power adapter.



- 3 Wait about 10 seconds, the TX's indicator light will become flashing to solid, and then the screen will automatically project.

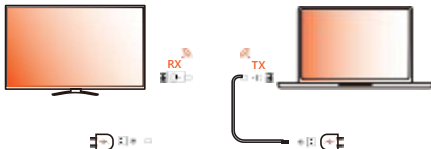

How to re-pair?

1. Receiver(RX)

Use a paperclip to press and hold the re-pair hole on the HDMI end of the receiver for about 2 seconds until the monitor displays "Release the button to pair with Mate," then release it.



Note:

1. Please don't mix up the re-pair hole, just press the HDMI end hole.
2. There are 2 modes for re-pair hold on Receiver, depending on pressing time.
 - (1) Press for 2 seconds: Turn on pairing mode for the Transmitter.
 - (2) Press for 15 seconds: Reset the Receiver to default.

2. Transmitter(TX)

When "Ready to pair" appears on the monitor, use a paperclip to press and hold the re-pair hole on the HDMI end of the Transmitter for about 5 seconds, then release it.



Note:


Please don't mix up the re-pair hole, just press the HDMI end hole.

3. Wait for about 5 seconds, they will auto mirror again.

How to find new version?

1. Find SSID and PSK on Receiver.

- (1) Connect the receiver to the HDMI port on your TV/ monitor/ projector, and power it on via a separate 5V/1A power adapter.
- (2) Enter the pairing mode on receiver to get the SSID and PSK number: Use a paperclip to press and hold the reset hole on the HDMI end of the receiver for 2 seconds, then release it. The monitor will display the SSID and PSK on the top of the screen.






2. Enter Receiver's background setting interface

- (1) Turn on the Wi-Fi settings page on your phone or computer. connect it with receiver: SSID is the Wifi name, PSK is the password.
- (2) Open a browser and enter 192.168.203.1.
- (3) Enter the settings page, click "internet", and connect the receiver to your network.



3. Online upgrade

- (1) Check the icon    on the monitor, verify the receiver is connected to the network.
- (2) Return to the settings page and select "Upgrade."
- (3) The system checks the current version status. If there is a newer version, agree to update to complete the system upgrade.

FCC Warning Statement

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- - Reorient or relocate the receiving antenna.
- - Increase the separation between the equipment and the receiver.
- - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- - Consult the dealer or an experienced radio/TV technician for help.

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Exposure Statement To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated at a minimum distance of 20cm from the radiator of your body. This device and its antenna(s) must not be co-located or operated in conjunction with any other antenna or transmitter.

ISED Statement

English: This device complies with Industry Canada license-exempt RSS standard(s).

Operation is subject to the following two conditions: (1) This device may not cause interference, and (2) This device must accept any interference, including interference that may cause undesired operation of the device.

The digital apparatus complies with Canadian CAN ICES-3 (B)/NMB-3(B).

- French: Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils

radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement. L'appareil numérique du ciem conforme canadien peut 3 (b) / nmb 3 (b).

This device meets the exemption from the routine evaluation limits in section 2.5 of RSS 102 and compliance with RSS 102 F exposure, users can obtain Canadian information on F exposure and compliance.

cet appareil est conforme à l'exemption des limites d'évaluation courante dans la section 2.5 du cnr - 102 et conformité avec rss 102 de l'exposition aux rf, les utilisateurs peuvent obtenir des données canadiennes sur l'exposition aux champs rf et la conformité.

This equipment complies with Canada radiation exposure limits set forth for an uncontrolled environment.

Cet équipement est conforme aux limites d'exposition aux rayonnements du Canada établies pour un environnement non contrôlé.

This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Cet équipement est conforme Canada limits d'exposition aux radiations dans un environnement non contrôlé.

The device for operation in the band 5150-5250 MHz is only for indoor use to reduce the potential for harmful interference to co-channel mobile satellite systems.

L'appareil destiné à fonctionner dans la bande 5150-5250 MHz est uniquement destiné à une utilisation en intérieur afin de réduire