

BluDento®

BLT-2 WIRELESS MUSIC RECEIVER

USER MANUAL



WELCOME

BluDento®

Congratulations on your purchase of the BluDento BLT-2 True Hi-Fi BT Music Receiver. The following pages explain the features and operation of the BLT-2. Please take a few moments to read this user guide.

Also read all safety instructions before proceeding. The answers to most set up and performance questions can be found in this guide. If you have any further questions about the operation or use of this product, please contact our customer care team for assistance on eshop@bludento.com

OVERVIEW

Enjoy a limitless universe of high definition digital music through your existing Hi-Fi audio system. BLT-2 streams the highest quality audio wirelessly from your BT enabled device to any music system or powered speakers. BLT-2 is a true high fidelity component that uses high-end Qualcomm® aptX™ Low Latency / AAC / SBC audio streaming codecs and audiophile grade DAC to unleash all the clarity, crispness and full emotional impact your Hi-Fi stereo system can deliver. Unlike standard BT receivers, BLT-2 provides ultimate wireless freedom with the longest wireless range.

IN THE BOX

- BluDento BLT-2
- 2RCA to 2RCA Stereo Audio Cable
- 3.5mm to 2RCA Stereo Audio adapter
- USB to micro USB Cable
- TOSLINK optical audio cable
- User Guide

NOT included:

- Coaxial audio cable
- Power plug USB 5V DC (0.2A - 3.0A)




Power plug
USB 5V DC
(0.2A - 3.0A)

Toslink
Optical
Output

Coax
Audio
Output

Stereo
Analog
Output

BluDento®

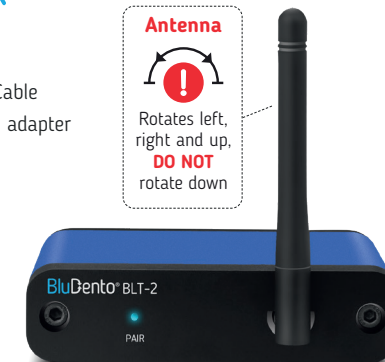

Antenna
Rotates left,
right and up.
DO NOT
rotate down

Pairing LED

Understanding the LED alerts:

Blue blinking: powered
and in pairing mode,
waiting to be paired
Solid blue light:
In connection

QUICK SETUP

BluDento®

Setup and pairing is really easy. The following instructions will help you connect BLT-2 to your music system and pair with your tablet, computer or smartphone.

STEP 1: Connect audio cables from BLT-2 rear panel to your music system audio input.

STEP 2: Connect a power adapter (excluded) to BLT-2 with the included power supply cable and plug the power adapter (excluded) into an AC outlet. BLT-2 will automatically go into pairing mode. The LED light will start flashing to indicate the unit is now ready to be paired.

STEP 3: Turn ON BT on your device and go to BT preferences.

STEP 4: Scan listed BT devices and select "BLT-2" to pair and connect. The LED indicator should turn solid.

STEP 5: Make sure your Hi-Fi audio system is turned on and the proper input source is selected.

STEP 6: The music on your smart device will now play through your Hi-Fi audio system.

Disconnect BLT-2 from a paired device and put it back into pairing mode.

Repeat Steps 3 to 6 to add additional devices. BLT-2 can connect to two smart devices at a time, but is capable of remembering up to 8 devices.

HOW TO PAIR TWO PHONES

1. Power on BluDento Bluetooth receiver
2. Enable Bluetooth on the 1st phone, search and connect to "BLT-2"
3. After pairing successfully, disable Bluetooth on the 1st phone. BluDento will enter pairing mode again.
4. Pair BluDento to the 2nd phone by the same way.
5. After pairing successfully, enable Bluetooth on the 1st phone, click to connect "BLT-2" again.
6. Now both 2 phones are connected to BluDento.

Note: Only 1 phone can play at a time, you have to pause the other.

SAFETY INSTRUCTIONS

BluDento®

- ! Keep product dry to avoid affecting the interior circuitry of the product.
- ! High temperature will shorten the life of electronic device.
- ! Don't expose to extreme temperatures, it may damage the internal circuit board.
- ! Don't drop the product.
- ! Don't put the product in direct sunlight or place in hot areas.
- ! Don't use chemical or detergent to clean the product.
- ! Don't take the product apart or the warranty will be voided.
- ! Using the product at excessive volumes may cause permanent hearing damage. You can get the most out of your equipment and enjoy great audio performance even at safe levels.
- ! Due to isolating characteristic of the product, do not use the product at excessive volume while driving or in any other activity where failure to hear surrounding sounds could be dangerous.

TROUBLESHOOTING TIPS

My device does not pair with BLT-2.

- Ensure that BT is turned ON on your device.
- Make sure that the LED indicator is blinking and your device is as close to BLT-2 as possible.
- Restart the BLT-2 and cycle BT on your device in order to re-establish the connection.

The LED Indicator is solid, but I cannot connect my device.

- Check whether no other devices are connected. If so, either disconnect or turn off BT on the other devices till it flashes, then try connecting.
- Close the BT function of all your BT devices and open them again.

The sound quality is poor and / or the audio is cutting out.

- Move your device or BLT-2 away from cordless phones, routers, microwave ovens or other BT devices.
- Try moving your device closer to BLT-2.
- Turn off your device's Wi-Fi.
- Try unpairing and repairing your device to BLT-2.
- Check that your device's OS is updated to the latest version.

BluDento®

TECHNICAL SPECIFICATIONS

BT Version: 5.1 with aptX Low Latency

Supported Codecs: aptX, aptX Low Latency, SBC, AAC, MP3, FLAC, TFF

BT Range: 30 meters, 100 feet

Input: BT

Outputs: Stereo Analog RCA; Digital Optical & Coaxial (SPDIF)

Input Power: Power Requirement: DC 5V (USB), 200mA (Min), 3A (Max)

Output Voltage: 2.1 Volts RMS

Output Impedance: 57 Ohms

D/A Converter: TI PCM5102A

Frequency Response: 10Hz - 20kHz (+/- 0.5dB)

Signal to Noise Ratio: 112dB

Total Harmonic Distortion: + Noise < 0.02%

Latency: ~30 milliseconds (MS)

Enclosure: Aluminum + ABS



**To reduce the risk of electric shock
Do not remove cover (or back).**

No user-serviceable parts inside.
Refer servicing to qualified service personnel.

BluDento®

PRODUCT SAFETY

When used in the directed manner, this unit has been designed and manufactured to ensure your personal safety. Improper use of this product can result in potential electrical shock or fire hazards. Please read all safety and operating instructions carefully before installation and use. Keep these instructions handy for future reference.

Users of this product are cautioned not to make modifications or changes that are not approved by BluDento, Inc. Doing so may void the compliance of this product and may result in the loss of the user's authority to operate the equipment.

WARRANTY

Don't worry. Your BluDento BLT-2 is covered under our warranty. For warranty information please visit: <http://bludento.com/contact-bludento/>

www.bludento.com
eshop@bludento.com

BluDento®

BluDento®

©2021 BluDento, Inc. All Rights Reserved.

Qualcomm aptX is a product of Qualcomm Technologies, Inc. and/or its subsidiaries. Qualcomm is a trademark of Qualcomm Incorporated, registered in the United States and other countries. aptX is a trademark of Qualcomm Technologies International, Ltd., registered in the United States and other countries.

DESIGNED IN AUSTRALIA – MADE IN CHINA

BLUDENTO INC.

