




If there are any concerns regarding signal strength and location of the wall mounted PRT it is advisable to pair the control and check the signal strength before fixing to the wall.



When the Halo is set up use this commissioning checklist to check and complete the install.


Description		Confirmed
Use the "Identify" function to confirm successful pairing has taken place. Short press on the Pair button on the Smart Interface. Press Pair button again to exit "Identify" function.	Zigbee LED on Smart Interface flashes green Halo home screen flashes to indicate successful pairing Zigbee LED on Smart Wiring Centre flashes green	
Halo is positioned in the homeowners chosen location if desk mounted.		
Check RSSI (Received Signal Strength Indication) of the Zigbee wireless connection via support page on the PRT (access via the menu).	Target RSSI between 0 and -65 and text green	
Check RSSI (Received Signal Strength Indication) of the Wi-Fi connection via the support information in the Halo app (Wi-Fi only).	Target RSSI between 0 and -65 and text green	
On the Halo set the mode to AUTO then increase the temperature to 30°C (repeat using Halo app if applicable).	Flame icon ON Heating zone on Smart Wiring Centre OFF	
<i>Note: Boiler will (turn on) once zone valve is in fully open position</i>	Boiler ON Boiler LED on Smart Interface ON (Green) Flame OFF	
On the Halo set the heating mode to AUTO then decrease the temperature to 5°C (repeat using Halo app).	Heating zone on Smart Wiring Centre OFF Boiler OFF Boiler LED on Smart Interface OFF	
On the Halo set the hot water mode to ON (repeat using Halo app).	Hot water ON (icon turns orange) Hot water zone on Smart Wiring Centre ON	
<i>Note: Boiler will (turn on) once zone valve is in fully open position</i>	Boiler ON Boiler LED on Smart Interface ON (Green) Hot water OFF (icon turns white)	
On the Halo set the hot water mode to OFF (repeat using Halo app).	Hot water zone on Smart Wiring Centre OFF Boiler OFF Boiler LED on Smart Interface OFF	

TOP TIP: For a robust signal between units, where possible, ensure that the line of communication between the Smart Interface and other units is not through any stone or metallic object.

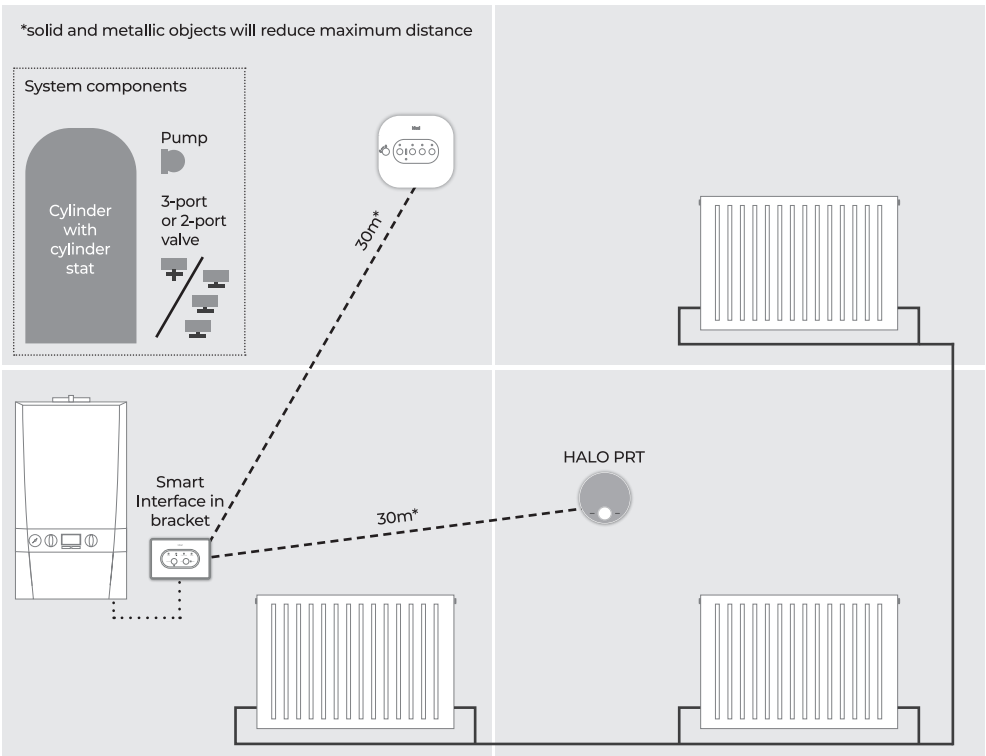

SI	Smart Interface
————	Pipework
-----	RF Connection
.....	Wiring

The Halo control system connects to the home Wi-Fi network through a module in the Smart Interface. The home Wi-Fi router should be positioned no more than 30 meters from the Smart Interface. Where possible avoid directing communications through metal frames or solid concrete walls.

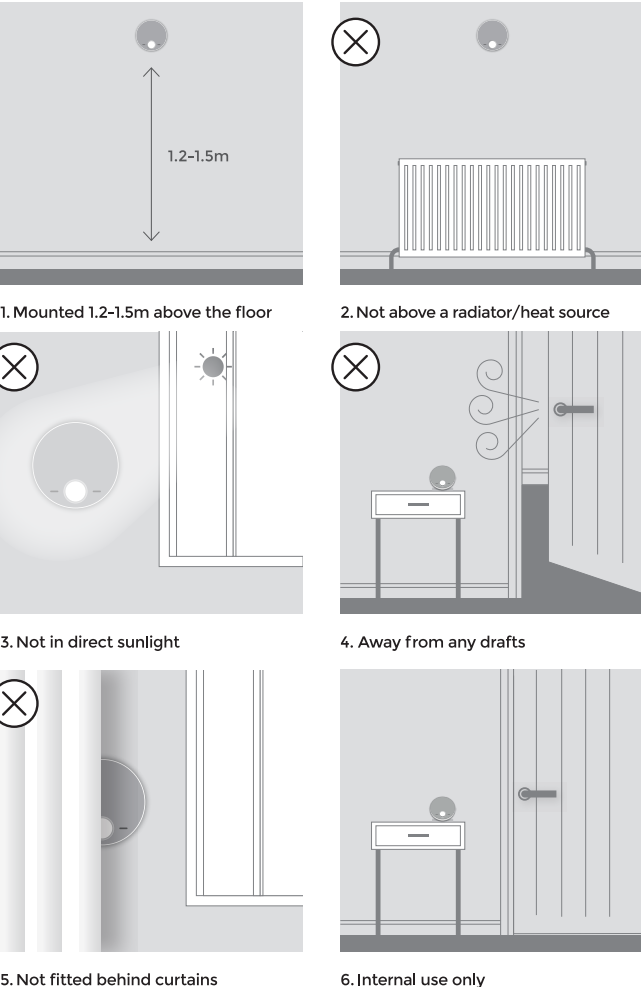

1. Halo Combi PRT display unit

2. PRT rear housing

3. Trim plate

4. Desk stand

5. Smart Wiring Centre

6. Smart Interface

7. Smart Interface bracket

8. Install/user guides, wiring diagrams and zone valve labels


9. 4 AA Batteries

10. Screws & Rawlplugs™

The Smart Interface is Wi-Fi enabled and can be linked to the home Wi-Fi network to allow app-controlled heating through the Halo app.

These instructions are applicable to the Ideal boiler models stated and must not be used with any other make or model of boiler. This product must be installed to all applicable standards. **Always isolate the mains supply before installing or working on any components that require a 230V ac supply.**

The Ideal Halo app is available to download from the Apple app store and on Google Play. To save time the householder may want to download the app and set up the account whilst the thermostat is being installed.

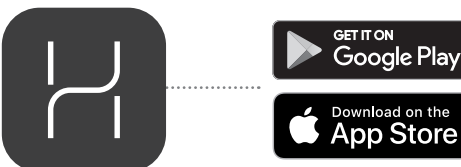

Description		Confirmed	
		Zone 1	Hot Water
Check the Smart Interface indication is correct.	Power LED green Zigbee LED green Connectivity LED green		
Check the Smart Wiring Centre indication is correct.	Power LED green Pair LED green		
Full battery level indication on Halo home screen.			
Zigbee network icon is present on the Halo home screen.			
Cloud network icon is present on Halo home screen. *Halo Combi Wi-Fi only			
Time and date correct. Note: on Halo Wi-Fi time and date taken from the cloud.			
Zone valves labelled using provided labels.			
Installer contact details inputted if required.			
Suitable schedule has been entered for the user. *remember to set both heating and hot water back to users desired mode			
General overview of operation provided to user - refer to user guide.			
Any advanced settings changes have been recorded.			
Remember to leave this guide with the householder.			

Smart power LED on Smart Interface	Check Smart Interface is wired to the fuse spur. Check fuse spur is on.
Halo screen is flashing continuously	The Smart Interface is in 'Identify' mode press the Pair button to cancel this mode.
Boiler fails to fire when increasing target temperature on the Halo	Check the target temperature is above current temperature. Check Smart Interface power LED is green. Check Smart Interface is wired securely to the boiler.
Halo screen shows failed to pair	Check Smart Interface is in pairing mode (Zigbee LED flashing red). Check distance between Smart Interface and Halo (see section B). Reset Smart Interface by inserting a paperclip or pen tip into reset button. Start pairing mode again on the Smart Interface and press retry on the Halo. If the situation persists then consider using Zigbee Booster (available separately) or mounting the Smart Interface closer to the PRT.
Halo screen shows Replace Halo	If you have no other Halo thermostats connected to the Smart Interface or are not replacing an existing Halo then press accept.
In the support page the Zigbee RSSI is lower than -65	Consider moving the Halo closer to the Smart Interface. If the situation persists then consider using Zigbee Booster (available separately) or mounting the Smart Interface closer to the PRT.
Smart Interface will not connect to home Wi-Fi	Check Smart Interface is in Access Point (AP) mode (refer to setup sequence in app). Check Wi-Fi router configuration, check Wi-Fi security is set to WPA / WPA2. Check range < 50M between Smart Interface and Wi-Fi router. If the situation persists then consider using a Wi-Fi Booster or mounting the Smart Interface closer to the Wi-Fi router.
Deleting Halo from the Zigbee Network	On the Halo press the dial and the right hand key together for 15 seconds, this will delete the Halo from the Zigbee network and factory reset the device.
Deleting Smart Wiring Centre from the Zigbee Network	On the Smart Wiring Centre press and hold pair button, the pair LED on the Smart Wiring Centre will flash red then then orange to confirm the device has been deleted from the network.
Deleting Zigbee Network	To delete all devices from the Zigbee network, press and hold the Pair button on the Smart Interface. The Zigbee LED on the Smart Interface will flash red then orange to confirm the devices have been deleted from the network.
Factory reset of the Smart Interface	Press and hold the Pair button and the Override button for 20 seconds. The Smart Interface will delete all Zigbee devices from the network, this will take approximately 20 seconds and detach from the Wi-Fi network if the control is a connected control. On disconnection, the Smart Interface will automatically begin the setup process as per section H.2.b of the installation guide.



Hereby, Ideal Boilers Ltd declares that this device (model 222143) is in compliance with: Directive 2014/53/EU.

The full text of the EU declaration of conformity is available at the following internet address **idealheating.com**

UIN: 227167 A01



RF frequency: 2405 – 2480MHz Max.
RF output power: 10dBm


Ideal Heating is a trading name of Ideal Boilers and associated Group Companies

idea|heating.com |


welcome to our ideology



DESK MOUNTING THE HALO

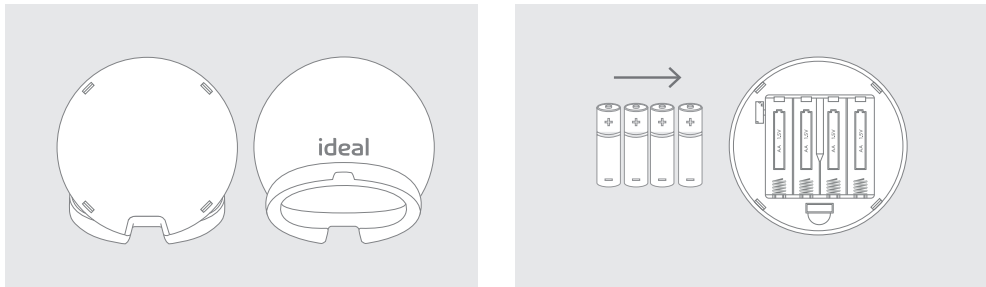


1. The Halo has an integrated rear housing and desk stand.
2. Insert the 4 AA batteries provided into the front housing of the Halo. Pay close attention that the orientation of the batteries is as indicated in the housing.

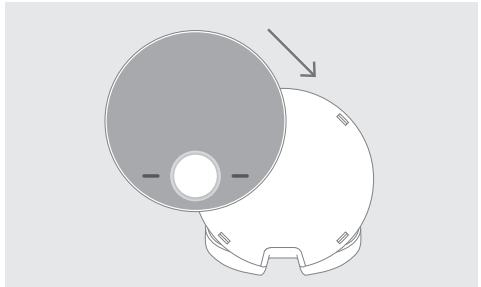


3. Clip the combined rear housing and desk stand into place.

H. PAIRING OF THE SMART INTERFACE TO THE SMART WIRING CENTRE

To pair the Smart Wiring Centre to the Halo Smart Interface follow the steps below.

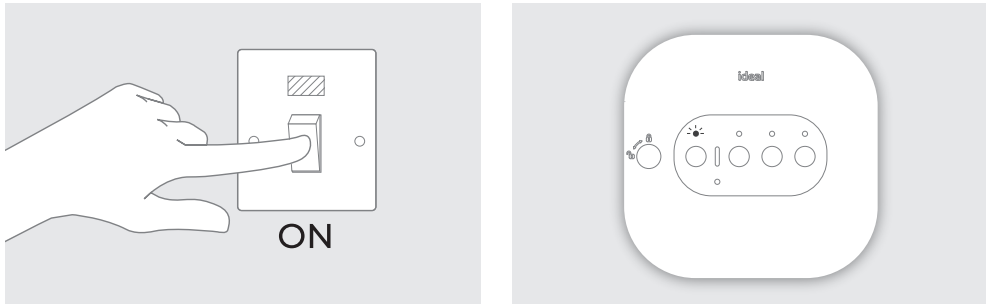

1. Turn the power back on to the boiler and Smart Wiring Centre.
- 2a. The Smart Wiring Centre will power up and automatically enter into pairing mode shown by the pairing LED flashing red, this mode will be active for 10 minutes. If further time is required after 10 minutes hold the pair button until the pair light flashes red.

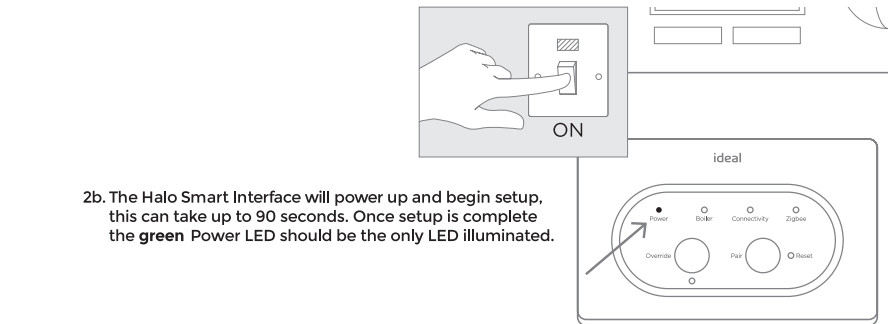


- 2b. The Halo Smart Interface will power up and begin setup, this can take up to 90 seconds. Once setup is complete the green Power LED should be the only LED illuminated.

E. INSTALLING THE SMART WIRING CENTRE

The Smart Wiring Centre controls the operation of the zone valves for the central heating system. The Smart Wiring Centre communicates wirelessly to the Smart Interface via the Zigbee RF protocol. The Smart Wiring Centre must be mounted to a fixed surface before installation.

Removing the cover


Using a suitable screwdriver turn the locking key one quarter turn anticlockwise to the [UNLOCK] position. Remove the front panel by lifting the left hand edge first. Assemble in reverse order. Always remember to lock the front panel to the Smart Wiring Centre.

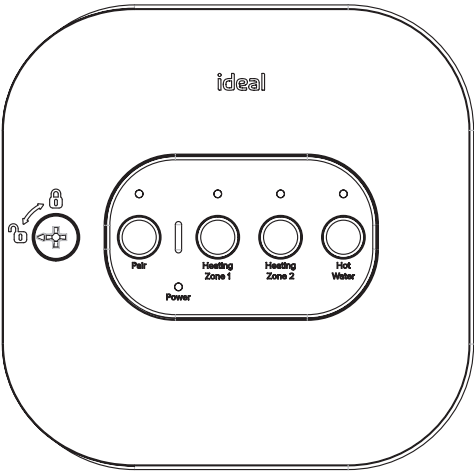

Wall mounting the Smart Wiring Centre

Please refer to the location guidelines before fixing the Smart Wiring Centre to the wall.

Using the 4 fixing locations on the Smart Wiring Centre secure to the Wall with adequate fixings for the wall type.

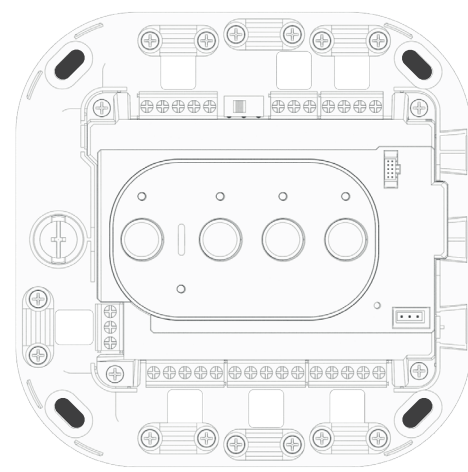


Do not remove the cover unless you are qualified to do so.

F. WIRING THE SMART INTERFACE

The Smart Wiring Centre must be installed by a competent person with the appropriate safety qualifications. All wiring must be adequately sheathed and insulated.

Isolate any 230V ac mains supply to the Smart Wiring Centre and any other linked components before commencing works.

For detailed wiring instructions please refer to the wiring diagram fold-out in the kit. This gives detailed wiring on S-plan and Y-plan systems. Ensure selector switch is in the correct position for the installed system. Wiring can either be installed from the rear of the device through the back housing cut outs or surface mounted. When surface mounting any wiring, use the reversible omega clamps provided. Remove all appropriate cut outs on front cover for wiring.

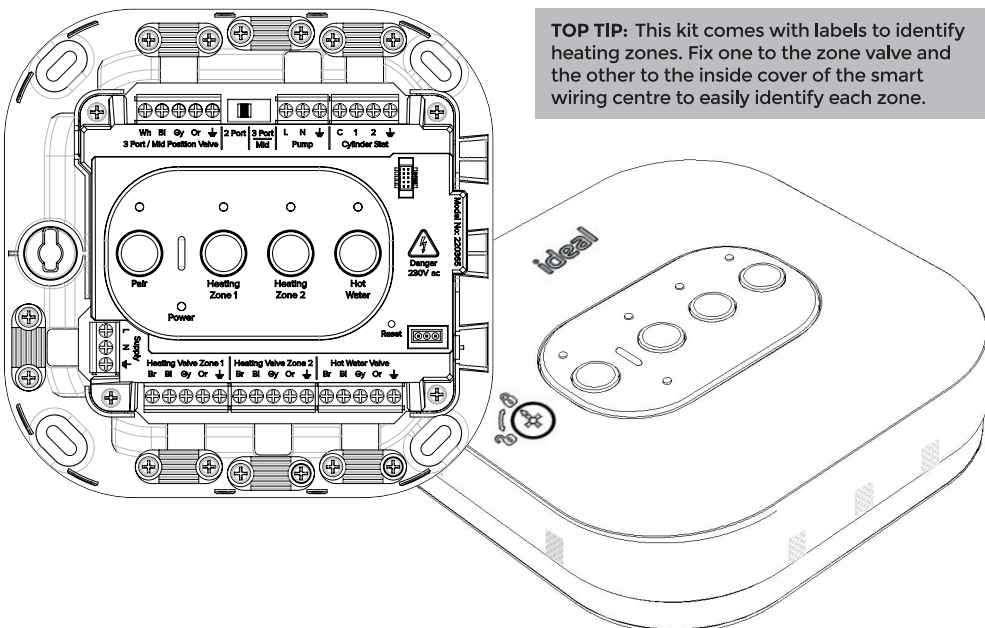


TOP TIP: This kit comes with labels to identify heating zones. Fix one to the zone valve and the other to the inside cover of the smart wiring centre to easily identify each zone.

Do not reinstate power once wiring is complete.

G. INSTALLATION OF THE SMART INTERFACE BRACKET AND THE SMART INTERFACE


To install the Smart Interface into a new boiler follow the steps below. For further details on the compatibility of older boilers please visit idealheating.com.

The Smart Interface Bracket can be mounted straight to the wall or onto an existing single gang wall box.

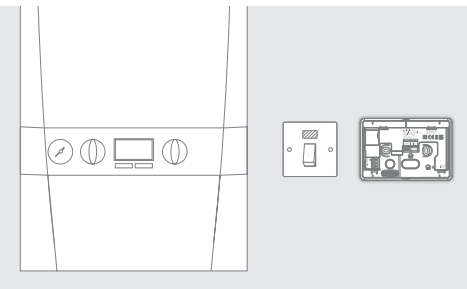


1. Locate the Smart interface bracket in a suitable location close to the boiler and fuse spur as the bracket is hard wired to both.


Note: The bracket should be <30m from the Wi-Fi router otherwise a Wi-Fi extender may need to be used.

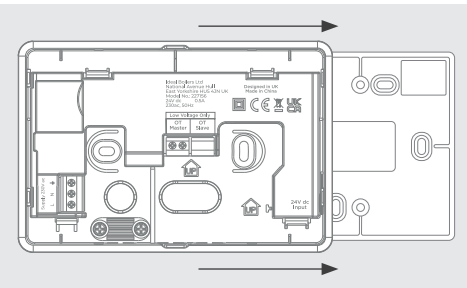

- 2b. To mount over the electrical box, place the bracket over the electrical box and fix into place.

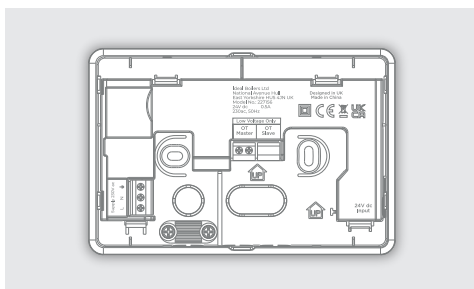


- 2a. To mount directly onto the wall, mark and drill 2 mounting holes and fix the bracket to the wall using suitable fixings for the wall type.

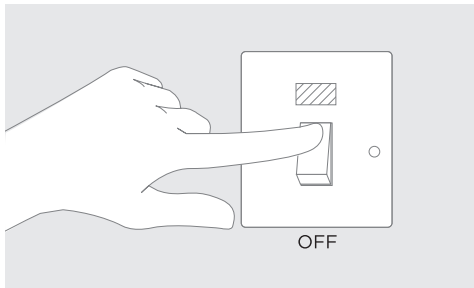


3. Isolate the mains supply.


G. INSTALLATION OF THE SMART INTERFACE BRACKET AND THE SMART INTERFACE (CONT.)

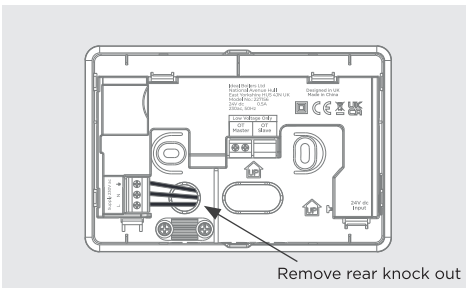


- 4a. Rear cable mounting: From the fuse spur wire the Live, Neutral and Earth connections into the left hand side connections in the Smart Interface Bracket marked L, N, (E).

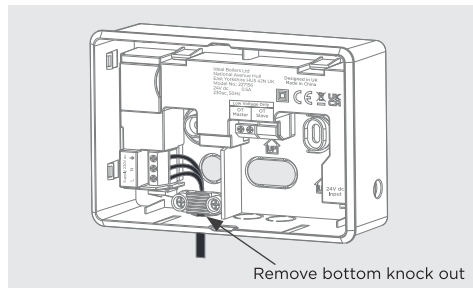

- 4b. Surface cable mounting: From the fuse spur wire the Live, Neutral and Earth into the left hand side connections in the Smart Interface Bracket marked L, N, (E). Using the cable clamp provided.

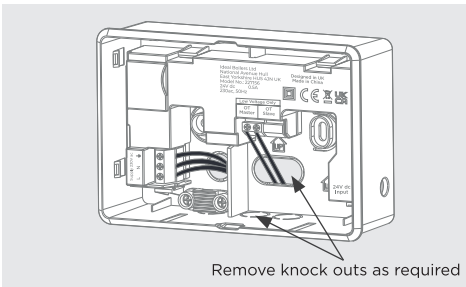


5. Wire the low voltage connection into the OpenTherm Master terminals located in the central position. Rear or surface mount options are available.

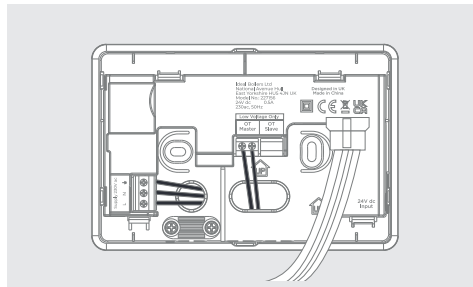


6. Install the Smart Interface by connecting the plug on the Smart Interface to the connector in the bracket.


G. INSTALLATION OF THE SMART INTERFACE BRACKET AND THE SMART INTERFACE (CONT.)

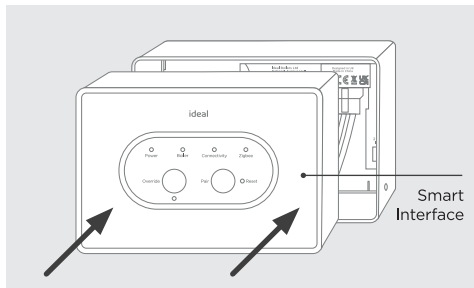


7. Carefully push the Smart Interface into the bracket.

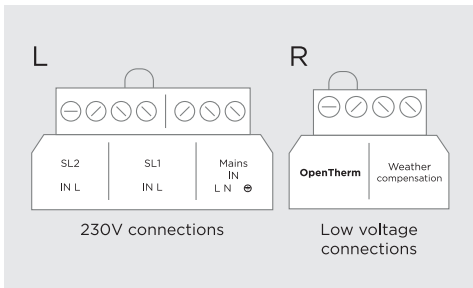

8. Locate the wiring terminal within the boiler control box (230V connections are on the left and low voltage on the right).

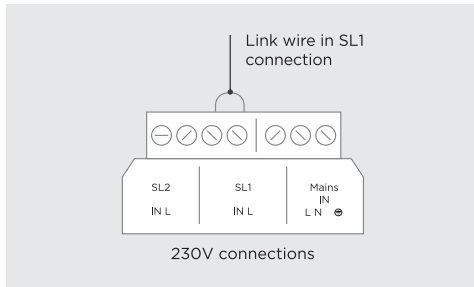


9. If an existing 230V signal is already installed remove any existing wiring from the 230V connections and add the link wire into the SL1 connections

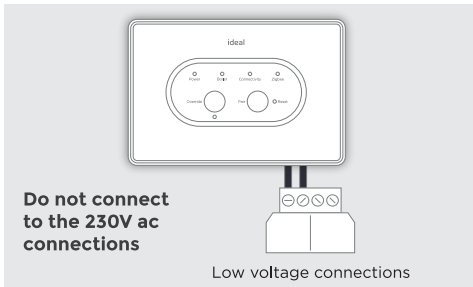

10. Take the cable that is wired into the bracket. OpenTherm Master terminals and connect into the OpenTherm connections in the boiler ensuring it is run through the strain relief (in new boilers remove the link positioned here before wiring).

J. CONNECTING THE HALO TO THE INTERNET*

1. Check the home router is connected to the internet.
2. Ensure 2.4GHz is enabled on the home Wi-Fi router.
3. If it has not been done already, download and install the Ideal Halo app onto the householders phone. (Available on Google Play or the Apple App Store.)
4. Open the Ideal Halo app, tap on create an account and follow the in-app instructions.
5. Once an account has been set up the app will automatically guide the user through connection of the Halo. This will involve using the app to link the Halo Smart Interface to the home Wi-Fi network by following the instructions on the screen.
6. The householder will need the name of their home Wi-Fi network and the password or network key to complete the setup.

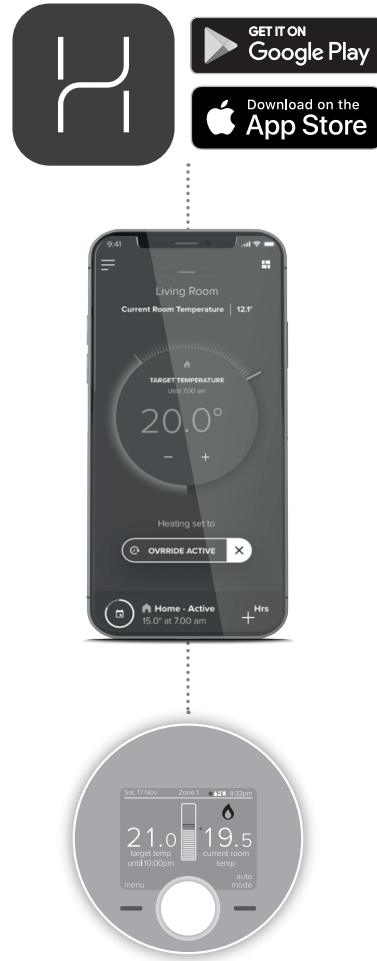

Minimum operating requirements
Smartphone/Tablet ~ iOS 9 Android 6.0
PC latest version of Chrome, Safari, Firefox or Internet Explorer on Mac OS or Windows 7

ADVANCED SETTINGS

Description	Factory setting	New setting
Optimised start Boiler starts heating in advance of schedule so heating reaches the required temperature at the time specified.	OFF	
Optimised stop Boiler stops heating in advance of schedule so heating reaches the required temperature at the time specified.	OFF	
Delayed start If the room temperature is close to target temperature the heating start time is delayed to save energy.	OFF	
Display tolerance Select the display tolerance of the room temperature, this can be set at increments of 0.5 or 0.1°C.	0.1°C	
Temperature offset Fine tune the room temperature display -2.5 to 2.5°C.	0°C	
Daylight saving time Automatically move to daylight saving.	ON	
Frost protection The temperature that will be used to protect your home when the thermostat is off. Can be set 5°C.	5°C	
Service phone number Opportunity to input Installer contact number for service reminders.	Ideal Heating number	

HALO FEATURES AND CONFIGURATION

To enter the settings menu press the menu button.

Menu options	Action
Holiday	Holiday mode allows the device to be switched off for a predefined period of time then automatically returns to the pre-programmed heating schedule.
Timed heating schedule	Set a heating schedule with up to 6 periods per day.
Timed hot water schedule	Set a hot water schedule with up to 6 periods per day.
Support	Includes information such as software version and key contact numbers.
Fault page	Shows the latest fault code and fault description.
Time and date	Time and date are set on power up and can be adjusted via the menu.
Advanced settings	Advanced features of the device setup should be set by a competent person.
Landlord settings	Specific settings for landlords.

SMART INTERFACE LED KEY

LED	Status
Power	Green - Power ON No illumination - No power
Boiler	Green - Demand No illumination - No demand
Connectivity	No illumination - Cloud connection not configured Red - No connection Blue - Connection to Wi-Fi network OK, no cloud connection Green - Connection to Wi-Fi and cloud OK Blue flashing - Access point mode
Zigbee	No illumination - No Zigbee network Green - Zigbee network active Green flashing - Identify function Red flashing - Pairing Red flashing then orange - Zigbee network deletion Orange for 30s - Factory reset
Override	Green - Override active* Green flashing - Failsafe active* No illumination - Override OFF*

*Override and Failsafe only active when communication is lost between the Halo PRT and Smart Interface. See Halo User Guide for more information.

SMART WIRING CENTRE LED KEY

LED	Status
Power	Green - Power ON Red Flashing - Override No illumination - No power
Pair	No illumination - No Zigbee network Green - Zigbee network active Green flashing - Identify function Red flashing - Pairing Orange then flashing red - Smart Wiring Centre deleted from Zigbee network
Heating Zone 1	Green - Demand No illumination - No demand
Heating Zone 2	Not used
Hot Water	Green - Demand No illumination - No Demand

*Override and Failsafe only active when communication is lost between the Halo PRT and Smart Interface. This allows for manual opening and closing of the zone valves.