



2022 LIGHTING & CONTROLS STOCK PRODUCT GUIDE

RESIDENTIAL | COMMERCIAL | INDUSTRIAL



HALO



METALUX



GREENGATE



SURE-LITES




LUMARK

VOL. 2

Find Everything You Need, When You Need It!


▶▶▶ [COOPERLIGHTING.COM/MARKETPRO](https://cooperlighting.com/marketpro)

- ✓ Product Information
- ✓ Utility Rebate Incentive Finder
- ✓ Digital Catalogs & Product Selection Guides
- ✓ Links to Educational Training and Resources
- ✓ Where to Buy

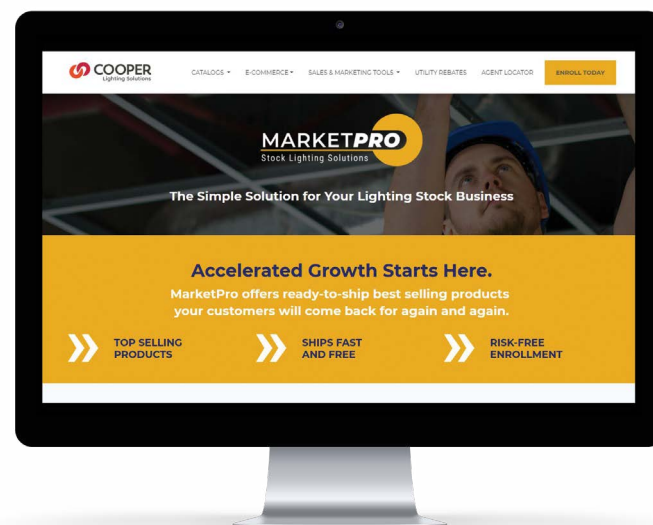

VISIT TODAY!

Visit [COOPERLIGHTING.COM/MARKETPRO](https://cooperlighting.com/marketpro) to view the MarketPro Catalog and to learn more about MarketPro products.

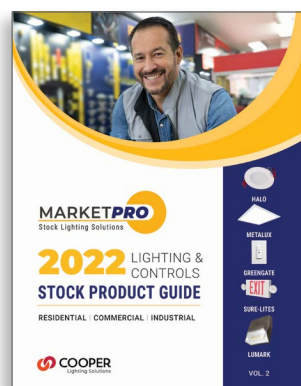

READILY-AVAILABLE SOLUTIONS FOR ALL PROJECTS FROM OUR TRUSTED BRANDS

The MarketPro program provides our customers with top selling lighting and controls products from industry-preferred brands for their trusted performance, reliability and quality. These products are in-stock and ready to ship to meet your project needs.



In-Stock

Our essential products are in stock and readily-available to ship



Top Brands

Trusted products from HALO, Metalux, Greengate, Sure-Lites and Lumark



Proven Best Sellers

Contractor preferred top selling lighting and controls products



Sample Before You Buy

Try new products risk free



Innovation

State-of-the-art product innovation, direct mount installation, selectable technology and integrated controls



Utility Incentives

Products qualify for ENERGY STAR® and DLC®, saving money and adding value



Expanded Selection

Customizable lighting products available through our Rapid Response and Quick Ship programs



Training & Education

Online and instructor-led classes to expand your lighting and controls knowledge

OUR BRANDS AND MARKETS WE SERVE

RESIDENTIAL



COMMERCIAL



INDUSTRIAL



We deliver a range of innovative and reliable indoor and outdoor lighting and control product solutions, as well as controls products specifically designed to maximize performance, energy efficiency and cost savings.

HALO Recessed & Surface Downlights

The brand leader of high-quality recessed downlights, surface and direct mount solutions featuring state-of-the-art engineering and performance.

PAGE 8

METALUX Ambient Commercial & Industrial

Commercial and industrial recessed, linear, surface and high bay solutions featuring the latest LED and driver technology for optimal performance.

PAGE 26

GREENGATE Sensors and Switch Controls

Complete offering of lighting control sensors, panels and switches designed to save energy and meet code compliances for many control strategies.

PAGE 36

SURE-LITES Exit & Emergency

Innovative and reliable emergency lighting fixtures, exit signs and battery packs for commercial and industrial applications.

PAGE 40


LUMARK Outdoor Commercial & Industrial

High-quality outdoor lighting for wall mount, floodlighting and area/site applications that provides ease of installation and superior area safety.

PAGE 46

SELECTABLE TECHNOLOGY

Field selectable technology empowers you to adapt to the ever-changing needs of your space creating the most optimal lighting experience.



Field selectable fixtures offer adjustable color temperatures (CCT) and lumen outputs with the flip of a switch. Selectable product categories include recessed downlights, ambient recessed panels, industrial high bays, outdoor wall and surface fixtures.

SELECTABLE COLORS (CCT)


Choose from a wide range of color temperatures to set the ideal lighting scene.

SELECTABLE LUMENS

Select between the preset lumen outputs to create your optimal lighting experience.

Visit cooperlighting.com/selectable to download the MarketPro Selectable Lighting Catalog and to learn about selectable products.

Look for selectable products in the **HALO**, **Metalux** and **Lumark** sections of this catalog.

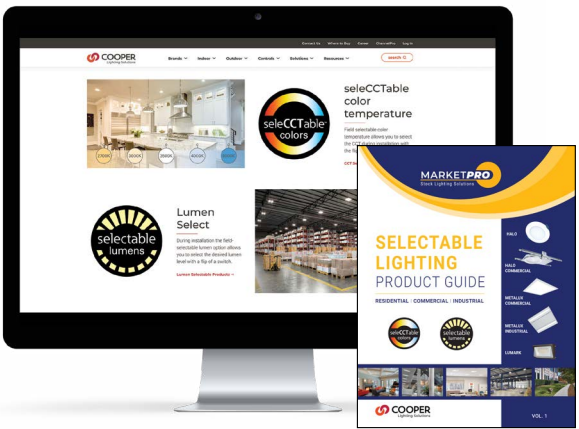

NEW PRODUCT SPOTLIGHT

Cooper Lighting Solutions meets the ever-changing needs of our customers by developing innovative, technology-driven lighting and controls solutions. Explore the latest MarketPro product offerings to find solutions featuring selectable technology and customizable options.



▶ HALO QuickLink Phase Cut Dimming Low Voltage System

Canless Direct Mount

The QuickLink Phase Cut Dimming Low Voltage system features a single LED remote driver, low voltage cable and your choice of canless HLB or LT-DM downlights.

Page 15



▶ HALO QuickLink 0-10V Dimming Low Voltage System

Canless Direct Mount

The QuickLink 0-10V Dimming Low Voltage system features a single LED remote driver, low voltage cable and your choice of canless HLB or RL-DM downlights.

Page 15



PRODUCT SPOTLIGHT



▶ HALO HLB Slim Edge

Canless Direct Mount

The HLB Slim Edge series offers an ultra-thin canless direct mount with a remote driver and junction box, ideal for new construction and renovation work.



Page 10

▶ HALO RL Night Light

Canless Direct Mount

The RL Night Light series features two modes: downlight mode for general illumination and night light mode for a gentle glow illuminating the acrylic trim.



Page 11

▶ HALO RL Slope

Canless Direct Mount

The RL Slope series offers a canless fixture that installs without the use of a recessed housing and directs light downward, regardless of ceiling pitch angle.



Page 12

▶ HALO Canless EZ-Trim

Canless Direct Mount

The Canless EZ-Trim features a durable metal baffle trim, attached junction box with options for GU10, GU24, and E26 lamp bases.



Page 16

HALO RECESSED



Canless
Direct Mount
p. 9-17



Surface Mount
p. 18-19



Retrofit Module
p. 20-21



Housing/Trim
p. 22-23

HALO®

Recessed LED Downlighting

HALO is the industry leader in high-quality recessed downlighting, offering the widest selection of innovative and flexible solutions for your application needs.

- **Go Fast.** Reduce install time with more ease.
- **Go Custom.** Flexible field selectable solutions.
- **Go Adjustable.** Shine light exactly where you need it.
- **Go Slim.** Install in ultra-shallow plenum.



Scan to browse HALO
Recessed videos




HALO®

CANLESS DIRECT MOUNT LIGHTING

GO WHERE STANDARD "CAN" LIGHTING CAN'T

It's time to expect more from your lighting: more functionality, more flexibility, and more canless direct mount product options than any other brand on the market.

Go Slim.



With canless, low-profile direct mounts available in multiple form factors and optical packages.

Available with HLB Series

Go Classic.



With direct mount products that mimic the look of traditional recessed trim flawlessly.

Available with RL, LT Series


Go Adjustable.



Adjustable solutions to shine light exactly where you need it.

Available with Slope, RA, LA, HLA Series

Go Custom.



With control options like field-selectable color temperature and lumens, dimming, and directional lenses.

Go Fast.



With thoughtful, unique features that reduce installation time, cost and increases ease of use.



Cut hole in ceiling.



Connect wiring to
junction box.



Select color temp or
lumen if available.



Connect module to driver
and install into ceiling.



Push module up into
the ceiling.

HALO CANLESS DIRECT MOUNT

HLB Downlight
CANLESS DIRECT MOUNT

- Ultra-thin prismatic LED lens downlight with remote driver/junction box
- Installs into drywall/suspended ceiling (no j-box or housing required)
- 5 field-selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K; 90 CRI
- Install from below the ceiling in as little as 3-1/2-inch plenum height
- Insulated Ceiling (IC) rated and Non-IC rated applications



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | ENERGY STAR ID |
|-------------------|-------------------|--------|----------------|----------------|-----------|--------|-------|--------------|----------------|
| HLB3059FS1EMWR | 3" Module, Round | White | 40W INC | 2700K-5000K | 120V | 500 | 9 | 080083151301 | N/A |
| HLB3S059FS1EMWR | 3" Module, Square | White | 40W INC | 2700K-5000K | 120V | 500 | 9 | 080083151325 | 2336938 |
| HLB4SP069FS1EMWR | 4" Module, Square | White | 65W INC | 2700K-5000K | 120V | 600 | 10 | 080083909667 | 2347583 |
| HLB4069FS1EMWR | 4" Module, Round | White | 65W INC | 2700K-5000K | 120V | 752 | 12 | 080083848140 | 2322243 |
| HLB4069FSE010MWR | 4" Module, Round | White | 60W INC | 2700K-5000K | 120-277V | 750 | 11 | 080083912261 | 2351376 |
| HLB4S069FSE010MWR | 4" Module, Square | White | 60W INC | 2700K-5000K | 120-277V | 725 | 11 | 080083912308 | 2351374 |
| HLB6099FS1EMWR | 6" Module, Round | White | 65W INC | 2700K-5000K | 120V | 1103 | 16 | 080083848164 | 2322242 |
| HLB6S099FS1EMWR | 6" Module, Square | White | 65W INC | 2700K-5000K | 120V | 1103 | 12 | 080083863389 | 2331663 |
| HLB6099FSE010MWR | 6" Module, Round | White | 75W INC | 2700K-5000K | 120-277V | 1061 | 15 | 080083912285 | 2351377 |
| HLB6S099FSE010MWR | 6" Module, Square | White | 75W INC | 2700K-5000K | 120-277V | 1050 | 15 | 080083912322 | 2351375 |
| HLB8169FS1EMWR | 8" Module, Round | White | 90W INC | 2700K-5000K | 120V | 1600 | 21 | 080083150601 | 2358047 |
| HLB8LS9FSE010MWR | 8" Module, Round | White | 150W INC | 2700K-5000K | 120-277V | 2400 | 31 | 080083083367 | 2358045 |
| HLB12LS9FSE010MWR | 12" Module, Round | White | 150W INC | 2700K-5000K | 120- 277V | 2400 | 32 | 080083088782 | N/A |

HLB Slim Edge Downlight
CANLESS DIRECT MOUNT

- Smooth LED lens downlight with remote driver/junction box
- Installs into drywall/suspended ceiling (no j-box or housing required)
- 5 field-selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K; 90 CRI
- Install from below the ceiling in as little as 1-1/2 inch plenum height
- Insulated Ceiling (IC) rated and Non-IC rated applications



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | ENERGY STAR ID |
|------------------|------------------|--------|----------------|----------------|---------|--------|-------|--------------|----------------|
| HLBPH4069FS1EMWR | 4" Module, Round | White | 65W INC | 2700K-5000K | 120V | 830 | 10 | 080083190003 | 2385132 |
| HLBPH6099FS1EMWR | 6" Module, Round | White | 65W INC | 2700K-5000K | 120V | 1100 | 14 | 080083190027 | 2385133 |

HALO CANLESS DIRECT MOUNT

HLB Lite Downlight
CANLESS DIRECT MOUNT

- Ultra-thin LED lens downlight with remote driver/junction box
- Installs into drywall/suspended ceiling (no j-box or housing required)
- Features a round polymer trim and smooth lens
- 3 field-selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K; 90 CRI
- Install from below the ceiling in 3/8-inch to 5/8-inch thick ceilings



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | ENERGY STAR ID |
|--------------------|------------------|--------|----------------|----------------|---------|--------|-------|--------------|---------------------------|
| HLBSL4069FS231EMWR | 4" Module, Round | White | 60W INC | 2700K - 3500K | 120V | 753 | 10 | 080083912346 | 2349484 |
| HLBSL4069FS351EMWR | 4" Module, Round | White | 60W INC | 3000K - 5000K | 120V | 716 | 10 | 080083916368 | 2349485 |
| HLBSL4069FS461EMWR | 4" Module, Round | White | 60W INC | 4000K - 6000K | 120V | 771 | 10 | 080083912384 | 2388764 |
| HLBSL6099FS231EMWR | 6" Module, Round | White | 75W INC | 2700K - 3500K | 120V | 954 | 13 | 080083912360 | 2349475, 2349476, 2349477 |
| HLBSL6099FS351EMWR | 6" Module, Round | White | 75W INC | 3000K - 5000K | 120V | 940 | 13 | 080083916382 | 2349478, 2349479, 2349480 |
| HLBSL6099FS461EMWR | 6" Module, Round | White | 75W INC | 4000K - 6000K | 120V | 1015 | 12 | 080083912407 | 2388798 |

RL Baffle Trim Downlight
CANLESS DIRECT MOUNT

- 4 and 6-inch regressed LED lens downlights with remote driver/junction box
- Installs into drywall/suspended ceiling (no j-box or housing required)
- 5 field-selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K; 90 CRI
- Can be installed in ½-inch to 1 ¼-inch thick ceilings
- Insulated ceiling (IC) and non-IC rated; Dimmable to 5% (120V dimmers)



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | ENERGY STAR ID |
|----------------|------------------------|--------|----------------|----------------|---------|--------|-------|--------------|----------------|
| RL4069S1EWHDM | 4" Direct Mount Module | White | 65W INC | 2700K-5000K | 120V | 652 | 9 | 080083858101 | 2325604 |
| RL4069S1EWHDMR | 4" Direct Mount Module | White | 65W INC | 2700K-5000K | 120V | 600 | 9 | 080083858064 | 2388493 |
| RL6069S1EWHDM | 6" Direct Mount Module | White | 65W INC | 2700K-5000K | 120V | 719 | 9 | 080083858125 | 2325603 |

RL Night Light Downlight
CANLESS DIRECT MOUNT

- 4 and 6-inch LED night light downlight with remote driver/junction box
- Installs into drywall/suspended ceiling (no j-box or housing required)
- 2" depth great for use in ultra-shallow plenum spaces
- Two modes: downlight mode and nightlight mode
- 5 field-selectable CCTs: 2700K, 3000K, 3500K, 4000K, 5000K; 90 CRI



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | ENERGY STAR ID |
|----------------|------------------|--------|----------------|----------------|---------|--------|-------|--------------|----------------|
| RL4069NLWHDMMR | 4" Module, Round | White | 65W INC | 2700K - 5000K | 120V | 845 | 9 | 080083183005 | 2381590 |
| RL6069NLWHDMMR | 6" Module, Round | White | 75W INC | 2700K - 5000K | 120V | 1115 | 11 | 080083183029 | 2381581 |

HALO CANLESS DIRECT MOUNT

RA Baffle Trim Adjustable Gimbal Downlight
CANLESS DIRECT MOUNT


- 4 and 6-inch adjustable LED gimbal downlight with remote driver/junction box
- Installs into drywall/suspended ceiling (no j-box or housing required)
- 360° rotation and 35° tilt; Dimmable to 5% (120V dimmers)
- 5 field-selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K; 90 CRI
- Insulated ceiling (IC) and non-IC rated



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | ENERGY STAR ID |
|----------------|----------------------------|--------|----------------|----------------|---------|--------|-------|--------------|----------------|
| RA4069S1EWHDMR | 4" Adjustable Direct Mount | White | 60W INC | 2700K - 5000K | 120V | 768 | 9 | 080083911325 | 2351865 |
| RA6069S1EWHDMR | 6" Adjustable Direct Mount | White | 60W INC | 2700K - 5000K | 120V | 770 | 9 | 080083911349 | 2351876 |

RL Slope Ceiling Downlight
CANLESS DIRECT MOUNT

- 4 and 6-inch canless LED direct mount modules
- Adjusts from 9° to 45° to match virtually any ceiling pitch
- 5 field-selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K; 90 CRI
- Installs into drywall/suspended ceiling (no j-box or housing required)
- Compatible with Halo new construction mounting frames



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | ENERGY STAR ID |
|------------------|------------------|--------|----------------|----------------|---------|--------|-------|--------------|----------------|
| RLS4099FS1EWHDMR | 4" Module, Round | White | 75W INC | 2700K - 5000K | 120V | 1027 | 11 | 080083190300 | 2382794 |
| RLS6159FS1EWHDMR | 6" Module, Round | White | 75W INC | 2700K - 5000K | 120V | 1745 | 19 | 080083190324 | 2382795 |

HLA Adjustable Gimbal Downlight
CANLESS DIRECT MOUNT

- 4-inch adjustable gimbal LED downlight with remote driver/junction box
- Installs into drywall/suspended ceiling (no j-box or housing required)
- 360° rotation and 30° tilt; Distributions: 40° flood, 80° very wide flood
- 5 field-selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K; 90 CRI
- Insulated ceiling (IC) and non-IC rated; Dimmable down to 5% (120V dimmers)



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | ENERGY STAR ID |
|--------------------|----------------------------|--------|----------------|----------------|---------|--------|-------|--------------|----------------|
| HLA406FL9FS1EMWR | 4" Adjustable Direct Mount | White | 65W INC | 2700K-5000K | 120V | 660 | 11 | 080083882960 | 2341271 |
| HLA406VWFL9FS1EMWR | 4" Adjustable Direct Mount | White | 65W INC | 2700K-5000K | 120V | 660 | 11 | 080083863600 | 2333844 |

HALO CANLESS DIRECT MOUNT

LT Selectable Downlight
CANLESS DIRECT MOUNT

- 3, 4 and 6-inch smooth splay LED downlights with remote driver/junction box
- Installs into drywall/suspended ceiling (no j-box or housing required)
- 3 field-selectable CCT: 2700K, 3000K, 3500K or 3000K, 4000K, 5000K; 90 CRI
- Dimmable down to 10% with select phase cut dimmers
- Insulated ceiling (IC) and non-IC rated; Deadfront



| Catalog Number | Product Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | ENERGY STAR ID |
|-------------------|------------------------|--------|----------------|----------------|---------|--------|-------|--------------|----------------|
| LT3059FS231EWHDMR | 3" Direct Mount Module | White | 40W INC | 2700K-3500K | 120V | 500 | 7 | 080083159680 | 2373973 |
| LT3059FS351EWHDMR | 3" Direct Mount Module | White | 40W INC | 3000K-5000K | 120V | 500 | 7 | 080083159628 | 2373976 |
| LT4069FS231EWHDMR | 4" Direct Mount Module | White | 40W INC | 2700K-3500K | 120V | 600 | 7 | 080083159925 | 2374009 |
| LT4069FS351EWHDMR | 4" Direct Mount Module | White | 40W INC | 3000K-5000K | 120V | 600 | 7 | 080083159642 | 2374012 |
| LT6089FS231EWHDMR | 6" Direct Mount Module | White | 65W INC | 2700K-3500K | 120V | 800 | 8 | 080083159963 | 2374019 |
| LT6089FS351EWHDMR | 6" Direct Mount Module | White | 65W INC | 3000K-5000K | 120V | 800 | 9 | 080083159666 | 2374021 |

LCR Light Commercial Retrofit Downlight
CANLESS DIRECT MOUNT

- Light commercial LED downlight in 2, 4, 6 and 8-inch sizes
- Installs into drywall/suspended ceiling (no j-box or housing required)
- 5 field-selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K; 90 CRI
- Regressed lens and smooth baffle provide high optical cutoff
- Wide distribution pattern is ideal for general area illumination; Airtight



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | ENERGY STAR ID |
|-----------------|---------------------|--------|----------------|----------------|----------|--------|-------|--------------|----------------|
| LCR2089FS1EMW | 2" LCR Direct Mount | White | 65W INC | 2700K - 5000K | 120-227V | 800 | 9 | 080083130061 | 2357903 |
| LCR2089FSE010MW | 2" LCR Direct Mount | White | 65W INC | 2700K - 5000K | 120-227V | 800 | 9 | 080083889969 | 2351780 |
| LCR4089FSE010MW | 4" LCR Direct Mount | White | 65W INC | 2700K - 5000K | 120-227V | 800 | 9 | 080083889983 | 2351828 |
| LCR4129FSE010MW | 4" LCR Direct Mount | White | 75W INC | 2700K - 5000K | 120-227V | 1200 | 15 | 080083890002 | 2351827 |
| LCR6159FSE010MW | 6" LCR Direct Mount | White | 72W INC | 2700K - 5000K | 120-277V | 1604 | 16 | 080083890026 | 2351826 |
| LCR6219FSE010MW | 6" LCR Direct Mount | White | 72W INC | 2700K - 5000K | 120-277V | 2329 | 25 | 080083890040 | 2351825 |
| LCR6309FSE010MW | 6" LCR Direct Mount | White | 130W INC | 2700K - 5000K | 120-277V | 2981 | 30 | 080083890064 | 2351824 |
| LCR8309FSE010MW | 8" LCR Direct Mount | White | 130W INC | 2700K - 5000K | 120-277V | 3153 | 35 | 080083890088 | 2351823 |
| LCR8509FSE010MW | 8" LCR Direct Mount | White | 130W INC | 2700K - 5000K | 120-277V | 4841 | 47 | 080083890101 | 2351822 |
| LCR8809FSE010MW | 8" LCR Direct Mount | White | 130W INC | 2700K - 5000K | 120-277V | 7752 | 94 | 080083890125 | 2365275 |



Installing downlights has never been faster.

QuickLink delivers the fastest downlighting installation HALO has to offer. Power multiple fixtures on the single power supply for easy and efficient lighting installation.

- Each QuickLink Kit contains a remote power supply, low voltage cable and canless downlights
- Each fixture attaches to the low voltage cable with QuickLink Twist Connectors
- Mix and match individual fixtures to complete the project

QuickLink Low Voltage System



SAVE UP TO 85% WIRING TIME

1 POWER SUPPLY & MULTIPLE FIXTURES



With QuickLink Twist Connectors, each fixture attaches to the low voltage cable in seconds. The flexibility of the system allows the user to mix and match the compatible HALO QuickLink canless fixtures onto the same low voltage cable.



The SelecCTable™ technology puts flexibility at your fingertips. By using the switch located on the driver junction box, the user can choose from a range color temperatures:

2700K/3000K/3500K/
4000K/5000K

HALO CANLESS DIRECT MOUNT

QuickLink Phase Cut Dimming Low Voltage System CANLESS DIRECT MOUNT

- Kits include: 72W remote driver, cable and 4 or 6-inch HLB or LT-DM downlights
- Add additional fixtures and power up to 8 fixtures on 1 driver
- 5 field-selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K; 90 CRI
- QuickLink Connectors offer ultra-fast wiring and installation
- 120V input, phase cut dimming to 5%



| Catalog Number | Description | Max Fixtures | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts Per | UPC | ENERGY STAR ID |
|-------------------|---|--------------|--------|----------------|----------------|---------|--------|-----------|--------------|----------------|
| HLBQL4069FS1E-4PK | Kit: (1) Driver, Cable, (4) 4" HLB Fixtures | 7 | White | 65W INC | 2700K - 5000K | 120V | 640 | 8 | 080083190102 | 2388203 |
| HLBQL6099FS1E-4PK | Kit: (1) Driver, Cable, (4) 6" HLB Fixtures | 6 | White | 65W INC | 2700K - 5000K | 120V | 975 | 12 | 080083190126 | 2388204 |
| HLBQL4069FS1E | (1) 4" HLB Fixture* | - | White | 65W INC | 2700K - 5000K | 120V | 640 | 8 | 080083190188 | N/A |
| HLBQL6099FS1E | (1) 6" HLB Fixture* | - | White | 65W INC | 2700K - 5000K | 120V | 975 | 12 | 080083190218 | N/A |
| LTQL4069S1EDM-4PK | Kit: (1) Driver, Cable, (4) 4" LT-DM Fixtures | 8 | White | 65W INC | 2700K - 5000K | 120V | 675 | 7 | 080083190140 | 2388205 |
| LTQL6069S1EDM-4PK | Kit: (1) Driver, Cable, (4) 6" LT-DM Fixtures | 8 | White | 65W INC | 2700K - 5000K | 120V | 825 | 8 | 080083190164 | 2388206 |
| LTQL4069S1EDM | (1) 4" LT-DM Fixture* | - | White | 65W INC | 2700K - 5000K | 120V | 675 | 7 | 080083190232 | N/A |
| LTQL6069S1EDM | (1) 6" LT-DM Fixture* | - | White | 65W INC | 2700K - 5000K | 120V | 825 | 8 | 080083190256 | N/A |

*Driver not included. Only compatible with the HALO QuickLink 120V phase cut system

QuickLink 0-10V Dimming Low Voltage System CANLESS DIRECT MOUNT

- Kits include: 90W remote driver, cable and 4 or 6-inch HLB or RL-DM downlights
- Add additional fixtures and power up to 13 fixtures on 1 driver
- 5 field-selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K; 90 CRI
- QuickLink Connectors offer ultra-fast wiring and installation
- 120-277V input, 0-10V dimming to 5%



| Catalog Number | Description | Max Fixtures | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts Per | UPC | ENERGY STAR ID |
|---------------------|---|--------------|--------|----------------|----------------|----------|--------|-----------|--------------|----------------|
| HLBQL4069FSE010-6PK | Kit: (1) Driver, Cable, (6) 4" HLB Fixtures | 11 | White | 65W INC | 2700K - 5000K | 120-277V | 605 | 8 | 080083182206 | 2388712 |
| HLBQL6099FSE010-6PK | Kit: (1) Driver, Cable, (6) 6" HLB Fixtures | 7 | White | 65W INC | 2700K - 5000K | 120-277V | 935 | 12 | 080083182220 | 2388713 |
| HLBQL4069FSE010 | (1) 4" HLB Fixture* | - | White | 65W INC | 2700K - 5000K | 120-277V | 605 | 8 | 080083182367 | N/A |
| HLBQL6099FSE010 | (1) 6" HLB Fixture* | - | White | 65W INC | 2700K - 5000K | 120-277V | 935 | 12 | 080083182381 | N/A |
| RLQL4069SE010DM-8PK | Kit: (1) Driver, Cable, (8) 4" RL-DM Fixtures | 13 | White | 65W INC | 2700K - 5000K | 120-277V | 620 | 7 | 080083182282 | 2388378 |
| RLQL6069SE010DM-8PK | Kit: (1) Driver, Cable, (8) 6" RL-DM Fixtures | 13 | White | 65W INC | 2700K - 5000K | 120-277V | 665 | 7 | 080083182305 | 2388389 |
| RLQL4069SE010DM | (1) 4" RL-DM Fixture* | - | White | 65W INC | 2700K - 5000K | 120-277V | 620 | 7 | 080083182442 | N/A |
| RLQL6069SE010DM | (1) 6" RL-DM Fixture* | - | White | 65W INC | 2700K - 5000K | 120-277V | 665 | 7 | 080083182466 | N/A |

*Driver not included. Only compatible with the HALO QuickLink 120-277V system

Mounting Frame

CANLESS DIRECT MOUNT

- 4, 6 and 8-inch new construction frames for round and square products
- Accepts fixtures including remodel housings and direct-mount downlights
- Use to reserve the ceiling location or install products that need bar hangers
- Provides routing guidance for the drywall contractor
- Compatible with all direct mount products



| Catalog Number | Description | UPC |
|----------------|--------------------------------|--------------|
| HL4RSMF | 4" Round/Square Mounting Frame | 080083876167 |
| HL6RSMF | 6" Round/Square Mounting Frame | 080083876181 |
| HL8RSMF | 8" Round/Square Mounting Frame | 080083890460 |

HALO Canless EZ-Trim

bridges the gap between traditional downlighting (housing + trim + lamp) and canless LED downlighting


Product Features

- Direct Mount with durable metal baffle trim with attached j-box
- No housing required for installation
- Compatible with LED GU10, GU24 or E26 lamps
- Maximum lamp wattage: 15W
- IC rated, for direct contact with insulation
- Spring clips firmly secure fixture in ceiling

Traditional Housing

Features Minus the Housing

- A. Air-Tite pre-installed gasket
- B. Quick Connect pre-installed push-in wiring connectors
- C. Slide-N-Side pre-installed tool-less strain reliefs eliminate need for additional non-metallic cable connectors.

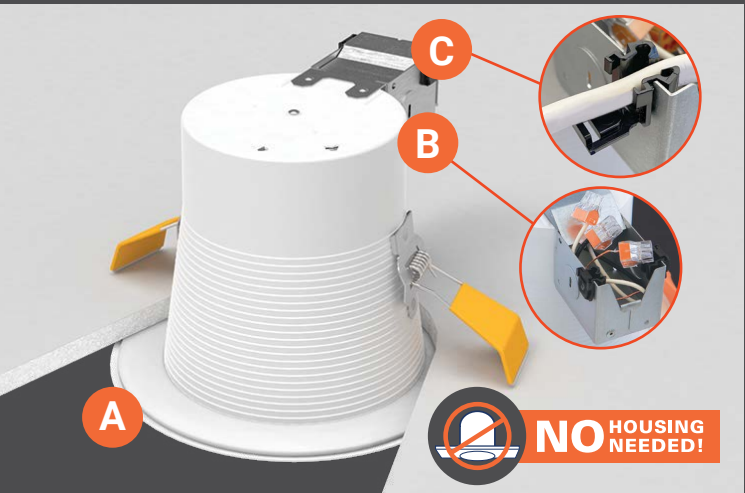

EZ-Trim

CANLESS DIRECT MOUNT



| Catalog Number | Description | Finish | Lamp Base | UPC |
|-------------------|-----------------------------|--------|-----------|--------------|
| CEZ4125GU10WBICAT | 4" Canless EZ-Trim | White | GU10 | 080083175536 |
| CEZ4125E26WBICAT | 4" Canless EZ-Trim | White | E26 | 080083175550 |
| CEZ6125E26WBICAT | 6" Canless EZ-Trim | White | E26 | 080083176212 |
| CEZ6125GU24WBICAT | 6" Canless EZ-Trim | White | GU24 | 080083175574 |
| CEZ6126E26WBICAT | 6" Canless EZ-Trim, Shallow | White | E26 | 080083176236 |
| CEZ6126GU24WBICAT | 6" Canless EZ-Trim, Shallow | White | GU24 | 080083175598 |



| | | HLB Series | RL-DM | RA-DM | LT-DM | HLA | RL Slope | LCR |
|-------------|---------------------------|------------|-------|-------|-------|-----|----------|-----|
| APPLICATION | Flush Lens | ✓ | | | | | | |
| | General Area Illumination | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Wet Location | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | New Construction | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Remodel | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Adjustable | | ✓ | ✓ | | ✓ | | |

| | | | | | | | | |
|------------------------|------------------|--|----------------|----------------|--------------------|----------------|----------------|-----------------------|
| FEATURES / PERFORMANCE | Size / Shape | 3", 4", 6" Round & Square 8" & 12" Round | 4" & 6" Round | 4" & 6" Round | 3", 4", & 6" Round | 4" Round | 4" & 6" Round | 2", 4", 6" & 8" Round |
| | Lumens (Max) | 2400 | 600 | 600 | 805 | 600 | 800 | 8000 |
| | Lite (L70B50) | 50K hours | 70K hours | 70K hours | 35K hours | 50K hours | 50K hours | 50K hours |
| | CRI | 90 (min) | 90 (min) | 90 (min) | 90 (min) | 90 (min) | 90 (min) | 90 (min) |
| | CCT (K) | 27/30/35/40/50 | 27/30/35/40/50 | 27/30/35/40/50 | 27/30/35/30/40/50 | 27/30/35/40/50 | 27/30/35/40/50 | 27/30/35/40/50 |
| | Spacing Criteria | 1.4 | 1.2 | 1.2 | 1.4 | 1.4 | 1.4 | 1.2 |
| | Input Voltage | 120/120-277 | 120 | 120 | 120 | 120 | 120 | 120-277 |
| | Mounting Frame | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| | Quicklink | QuickLink | QuickLink | QuickLink | QuickLink | | | |
| | | | | | | | | |

| | | | | | | | | |
|---------|------------------|---------------------|-----------|-----------|-----------|-----------|-----------|-----------|
| CONTROL | Field Select CCT | ✓ (5) CCT & (3) CCT | ✓ (5) CCT | ✓ (5) CCT | ✓ (3) CCT | ✓ (5) CCT | ✓ (5) CCT | ✓ (5) CCT |
| | LE/TE Phase Cut | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | |

Visit [Cooperlighting.com/MarketPro](https://www.cooperlighting.com/MarketPro) to download the Recessed Selection Guide.

HALO SURFACE MOUNT

SLD Downlight
SURFACE MOUNT

- Ultra-low profile 4 and 6-inch surface mount LED downlight
- 5 field-selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K; 90 CRI
- Ceiling or wall mounting in standard and fire-rated compatible junction boxes
- SLD6 retrofits in 5-inch and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- Supply wire adapter with LED quick wiring connector included



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | ENERGY STAR ID |
|-----------------|-----------------------------|--------|----------------|----------------|----------|--------|-------|--------------|----------------|
| SLDSL4069S1EMWR | 4" Surface Downlight | White | 65W INC | 2700K-5000K | 120V | 600 | 9 | 080083153107 | 2366149 |
| SLDSL6069S1EMWR | 6" Surface Downlight | White | 65W INC | 2700K-5000K | 120V | 600 | 9 | 080083153121 | 2366163 |
| SLD6129S1EMWR | 6" Surface Downlight | White | 75W INC | 2700K-5000K | 120V | 1200 | 15 | 080083153145 | 2373952 |
| SLD6129SE010MWR | 6" Surface Downlight | White | 75W INC | 2700K-5000K | 120-277V | 1200 | 15 | 080083153169 | 2373954 |
| SLDACCKIT | 4" and 6" SLD Accessory Kit | N/A | N/A | N/A | N/A | N/A | N/A | 080083159819 | 2373954 |

HLC Closet Light Downlight
SURFACE MOUNT

- Low-profile 6 and 9-inch surface mount LED downlights
- Below the ceiling installation, no clips or plates needed
- Installs in most 3-1/2-inch and 4-inch square, octagon or round junction and pancake boxes
- Supply wire adapter with LED quick wiring connector included; Sold as bulk packs only
- Meets NFPA requirements for use in closets



| Catalog Number | Description | Finish | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | ENERGY STAR ID |
|--------------------|--------------------------------|--------|----------------|-------|---------|--------|-------|--------------|----------------|
| HLC6099301EWH-6BP | 6" Closet Light (6-Pack) | White | 65W INC | 3000K | 120V | 925 | 16 | 080083896448 | 2338422 |
| HLC6099301EWH-12BP | 6" Closet Light (12-Pack) | White | 65W INC | 3000K | 120V | 900 | 16 | 080083884728 | 2338422 |
| HLC6099401EWH-6BP | 6" Closet Light (6-Pack) | White | 65W INC | 5000K | 120V | 900 | 16 | 080083896462 | 2338423 |
| HLC9129301EWH | 9" Closet Light | White | 100W INC | 3000K | 120V | 1285 | 18 | 080083884667 | N/A |
| HLC9129401EWH | 9" Closet Light | White | 100W INC | 4000K | 120V | 1200 | 18 | 080083884681 | N/A |
| HLCMS9129301EWH | 9" Closet Light, Motion Sensor | White | 100W INC | 3000K | 120V | 1200 | 18 | 080083127993 | N/A |
| HLCMS9129401EWH | 9" Closet Light, Motion Sensor | White | 100W INC | 4000K | 120V | 1200 | 18 | 080083130214 | N/A |

HALO SURFACE MOUNT

BLD Downlight
SURFACE MOUNT

- 4 and 6-inch low-profile surface mount LED downlight with wide distribution
- 5 field-selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K; 90 CRI
- Installs in most 3-1/2-inch and 4-inch square, octagon or round junction and pancake boxes
- Retrofits in 4, 5 and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- Supply wire adapter with LED quick wiring connector included



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | ENERGY STAR ID |
|----------------|----------------------|--------|----------------|----------------|---------|--------|-------|--------------|----------------|
| BLD4089SWHR | 4" Surface Downlight | White | 65W INC | 2700K-5000K | 120V | 802 | 10 | 080083826766 | 2362340 |
| BLD6089SWHR | 6" Surface Downlight | White | 65W INC | 2700K-5000K | 120V | 812 | 10 | 080083826803 | 2319364 |

SMD Downlight
SURFACE MOUNT

- Low-profile 4, 6 and 12-inch surface mount LED downlight with wide distribution
- 5 field-selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K; 90 CRI
- Ceiling/Wall mounting in many 3½- and 4-inch square, octagon or round junction boxes
- Retrofits 4-inch and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- Supply wire adapter with LED quick wiring connector included
- Dimmable to 5% (120V dimmers); 90 CRI



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | ENERGY STAR ID |
|----------------|-------------------|--------|----------------|----------------|---------|--------|-------|--------------|----------------|
| SMD4R69SWH | 4" Surface Mount | White | 60W INC | 2700K-5000K | 120V | 738 | 9 | 080083020904 | 2365919 |
| SMD4S69SWH | 4" Surface Mount | White | 60W INC | 2700K-5000K | 120V | 757 | 9 | 080083020928 | 2365921 |
| SMD6R69SWH | 6" Surface Mount | White | 60W INC | 2700K-5000K | 120V | 777 | 9 | 080083020942 | 2365923 |
| SMD6S69SWH | 6" Surface Mount | White | 60W INC | 2700K-5000K | 120V | 774 | 9 | 080083020966 | 2366348 |
| SMD12R209SWHE | 12" Surface Mount | White | 150W INC | 2700K-5000K | 120V | 2,232 | 27 | 080083138005 | N/A |

HALO RETROFIT MODULE

RL Baffle Trim Downlight
RETROFIT

- LED baffle-trim module for 3, 4, 5 or 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- Regressed lens; Convex form and lamp-like appearance; Uniform illumination
- 5 field-selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K; 90 CRI
- Compatible with Leading Edge and Trailing Edge phase control dimmers, Dimmable down to 5%
- Suitable for new construction, remodel and retrofit installation



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | ENERGY STAR ID |
|----------------|---------------------------|--------|----------------|----------------|---------|--------|-------|--------------|----------------|
| RL3059FS1EWHR | 3" Retrofit Baffle-Trim | White | 60W INC | 2700K-5000K | 120V | 587 | 8 | 080083130047 | 2353426 |
| RL4069S1EWHR | 4" Retrofit Baffle-Trim | White | 65W INC | 2700K-5000K | 120V | 621 | 9 | 080083818488 | 2354585 |
| RL4099S1EWHR | 4" Retrofit Baffle-Trim | White | 65W INC | 2700K-5000K | 120V | 1006 | 12 | 080083818501 | 2321466 |
| RL56069S1EWHR | 5/6" Retrofit Baffle-Trim | White | 65W INC | 2700K-5000K | 120V | 712 | 8 | 080083818525 | 2356074 |
| RL56099S1EWHR | 5/6" Retrofit Baffle-Trim | White | 65W INC | 2700K-5000K | 120V | 1006 | 12 | 080083818549 | 2354587 |
| RL56129S1EWHR | 5/6" Retrofit Baffle-Trim | White | 65W INC | 2700K-5000K | 120V | 1272 | 14 | 080083818563 | 2321465 |

RA Adjustable Gimbal Downlight
RETROFIT

- Adjustable gimbal LED module for 4, 5 and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- 360° rotation and 35° tilt; Wide distribution
- 5 field-selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K; 90 CRI
- Compatible with Leading Edge and Trailing Edge phase control dimmers
- Suitable for new construction, remodel and retrofit installation



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | ENERGY STAR ID |
|----------------|--------------------------------|--------|----------------|----------------|---------|--------|-------|--------------|----------------|
| RA4069S1EWHR | 4" Retrofit Adjustable, Wide | White | 65W INC | 2700K-5000K | 120V | 615 | 7 | 080083817849 | 2319905 |
| RA56069S1EWHR | 5/6" Retrofit Adjustable, Wide | White | 65W INC | 2700K-5000K | 120V | 630 | 7 | 080083817863 | 2319904 |

RSQ All-Purpose Square Series
RETROFIT

- Retrofits 4, 5 and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- Regressed flat lens with step baffle provides visual comfort and glare control
- 5 field-selectable CCT: 2700K, 3000K, 3500K, 4000K, 5000K; 90 CRI
- Compatible with Leading Edge and Trailing Edge phase control dimmers, Dimmable down to 5%
- Suitable for new construction, remodel and retrofit installation



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | ENERGY STAR ID |
|-----------------|--------------------------------|--------|----------------|----------------|---------|--------|-------|--------------|----------------|
| RSQ4089FS1EMWWB | 4" Retrofit Square Baffle-Trim | White | 60W INC | 2700K-5000K | 120V | 800 | 10 | 080083824496 | 2333094 |
| RSQ5089FS1EMWWB | 5" Retrofit Square Baffle-Trim | White | 60W INC | 2700K-5000K | 120V | 900 | 10 | 080083824595 | 2333267 |
| RSQ6089FS1EMWWB | 6" Retrofit Square Baffle-Trim | White | 60W INC | 2700K-5000K | 120V | 900 | 10 | 080083824694 | 2333093 |

HALO RETROFIT MODULE

LT Baffle Trim and Smooth Splay Downlight
RETROFIT

- LED downlights available with smooth splay or baffle trim
- Installs in 4, 5 and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- Dedicated or 3 field-selectable CCT: 2700K, 3000K, 3500K or 3000K, 4000K, 5000K; 90 CRI
- Dimmable down to 10% with select phase cut dimmers
- Suitable for use in showers and outdoor covered ceilings



| Catalog Number | Description | Finish | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | ENERGY STAR ID |
|---------------------|---------------------------------|--------|----------------|-------------|---------|--------|-------|--------------|------------------|
| LT460WH6930R | 4" Retrofit Baffle-Trim | White | 60W INC | 3000K | 120V | 554 | 8 | 080083746163 | 2309297 |
| LT460WH6930R-CA | 4" Retrofit Baffle-Trim, T20 | White | 60W INC | 3000K | 120V | 650 | 7 | 080083900893 | 2257770, 2277227 |
| LT560WH6930R | 5/6" Retrofit Baffle-Trim | White | 60W INC | 3000K | 120V | 683 | 10 | 080083746187 | 2309300 |
| LT560WH6930R-CA | 5/6" Retrofit Baffle-Trim, T20 | White | 60W INC | 3000K | 120V | 729 | 8 | 080083900954 | 2252183, 2277232 |
| LT560WH12930 | 5/6" Retrofit Baffle-Trim | White | 90W INC | 3000K | 120V | 1140 | 12 | 080083798681 | 2333089 |
| Selectable CCT | | | | | | | | | |
| LT4069FS231EWHR | 4" Retrofit Baffle-Trim | White | 40W INC | 2700K-3500K | 120V | 600 | 7 | 080083162406 | 2371503 |
| LT4069FS351EWHR | 4" Retrofit Baffle-Trim | White | 40W INC | 3000K-5000K | 120V | 600 | 7 | 080083162420 | 2371504 |
| LT56069FS231EWHR | 5/6" Retrofit Baffle-Trim | White | 65W INC | 2700K-3500K | 120V | 600 | 7 | 080083162468 | 2371505 |
| LT56069FS351EWHR | 5/6" Retrofit Baffle-Trim | White | 65W INC | 3000K-5000K | 120V | 600 | 7 | 080083162482 | 2371506 |
| LTSS4069FS231EWHWR | 4" Retrofit Smooth Splay Trim | White | 40W INC | 2700K-3500K | 120V | 600 | 7 | 080083162529 | 2371511 |
| LTSS4069FS351EWHWR | 4" Retrofit Smooth Splay Trim | White | 40W INC | 3000K-5000K | 120V | 600 | 7 | 080083162543 | 2371512 |
| LTSS56069FS231EWHWR | 5/6" Retrofit Smooth Splay Trim | White | 65W INC | 2700K-3500K | 120V | 600 | 7 | 080083162581 | 2371513 |
| LTSS56069FS351EWHWR | 5/6" Retrofit Smooth Splay Trim | White | 65W INC | 3000K-5000K | 120V | 600 | 7 | 080083162604 | 2371514 |

LA Adjustable Gimbal Downlight
RETROFIT

- Adjustable LED retrofit modules for 4-inch and 5/6-inch aperture recessed housings
- Regressed lens; 360° rotation and 35° tilt; Dimmable to 10%
- Retrofits 4, 5 and 6-inch insulated ceiling (IC) and non-IC rated recessed housings
- Torsion springs or friction blades secure trim tightly
- Precision construction and uniform illumination, 90 CRI; Airtight



| Catalog Number | Description | Finish | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | ENERGY STAR ID |
|----------------|---|--------|----------------|-------|---------|--------|-------|--------------|----------------|
| LA4069301EWH | 4" Retrofit Adjustable, Plastic, Wide | White | 40W INC | 3000K | 120V | 613 | 9 | 080083818143 | 2325616 |
| LA56069301EWH | 5/6" Retrofit Adjustable, Plastic, Wide | White | 40W INC | 3000K | 120V | 637 | 9 | 080083818242 | 2325606 |

HALO Housings Contractor Packs

HALO Housings Contractor Pack quantities are quick, convenient and easy to order for the items you use most.

E Series

- Compact and efficient housings for new or retrofit residential or light commercial construction
- Optimized and listed for EISA compliant tungsten-halogen lamps and incandescent, CFL and LED lamps
- For installation in insulated ceiling (IC) and non-IC rated ceilings



| Catalog Number* | Description | Socket | Voltage | Qty Per Single Catalog Number | Qty of Cartons | UPC |
|-----------------|--|---------------------------|----------|-------------------------------|----------------|--------------|
| E4ICATSB-60 | 4", IC, Shallow, New Construction | E26 | 120V | 60 Housings | 15 cartons | 080083253968 |
| E5ICATNB-60 | 5" IC, Air-Tite, New Construction, No Socket Bracket | E26 | 120V | 60 Housings | 10 cartons | 080083254071 |
| E27ICAT-60 | 6", IC, Shallow, New Construction | E26 | 120V | 60 Housings | 10 cartons | 080083254064 |
| E750ICAT-60 | 6" IC, Air-Tite, LED New Construction | Quick Connect (No Socket) | 120-277V | 60 Housings | 10 cartons | 080083254033 |
| E7ICAT-60 | 6" IC, Air-Tite, New Construction | E26 | 120V | 60 Housings | 10 cartons | 080083253944 |
| E7ICATNB-60 | 6" IC, Air-Tite, New Construction, No Socket Bracket | E26 | 120V | 60 Housings | 10 cartons | 080083253951 |
| E7RICAT-60 | 6" IC, Air-Tite, Remodel | E26 | 120V | 60 Housings | 10 cartons | 080083254019 |

*Only order 1 unit for catalog numbers above. Each catalog number represents 60 housings.

H Series

- The standard in the industry for both commercial and residential applications
- Optimized and listed for EISA compliant tungsten-halogen lamps and incandescent, CFL and LED lamps
- For installation in insulated ceiling (IC) and non-IC rated ceilings



| Catalog Number* | Description | Socket | Voltage | Qty Per Single Catalog Number | Qty of Cartons | UPC |
|-----------------|---|---------------------------|----------|-------------------------------|----------------|--------------|
| H245ICAT-60 | 4" New Construction Ultra Shallow | Quick Connect (No Socket) | 120/277V | 60 Housings | 15 cartons | 080083253982 |
| H245RICAT-60 | 4" Remodel Ultra Shallow | Quick Connect (No Socket) | 120-277V | 60 Housings | 15 cartons | 080083254057 |
| H995ICAT-60 | 4" New Construction, IC Air-Tite, Shallow | Quick Connect (No Socket) | 120/277V | 60 Housings | 10 cartons | 080083254040 |
| H99ICAT-60 | 4" New Construction, IC Air-Tite, Shallow | E26 | 120V | 60 Housings | 10 cartons | 080083254002 |
| H750ICAT-60 | 6" New Construction, IC Air-Tite | Quick Connect (No Socket) | 120/277V | 60 Housings | 10 cartons | 080083254026 |
| H7ICAT-60 | 6" New Construction, IC Air-Tite | E26 | 120V | 60 Housings | 10 cartons | 080083253975 |
| H7ICATNB-60 | 6" New Construction, IC Air-Tite, No Socket Bracket | E26 | 120V | 60 Housings | 10 cartons | 080083253999 |
| H7ICT-60 | 6" New Construction, IC | E26 | 120V | 60 Housings | 10 cartons | 080083254088 |

*Only order 1 unit for catalog numbers above. Each catalog number represents 60 housings.

4", 5" and 6" Series TRIM

- Trims shape light to minimize aperture glare and reduce ceiling brightness
- Open trims focus the downlighting beam to provide uniform distribution
- Can be used in new construction and remodel housings
- Offered in a variety of styles and accept different lamp types



| Catalog Number | Description | Finish | Lamp Source* | UPC |
|----------------|--|--------|------------------------|--------------|
| 4001WB | 4" Step Baffle - Plastic | White | Halogen, INC, LED, CFL | 080083745869 |
| 993W | 4" Coilex Baffle | White | Halogen, INC, LED, CFL | 080083628483 |
| 5001P | 5" Metal Splay Baffle | White | Halogen, INC, LED, CFL | 662400602729 |
| 5125WB | 5" Full Cone Baffle | White | Halogen, INC, LED, CFL | 080083743162 |
| 300P | 6" Open - Socket Supporting | White | Halogen, INC, LED, CFL | 662400302421 |
| 30WAT | 6" Air-Tite Baffle | White | Halogen, INC, LED, CFL | 662400603320 |
| 310W | 6" Coilex Baffle | White | Halogen, INC, LED, CFL | 080083515882 |
| 456W | 6" Baffle for Slope Ceiling | White | Halogen, INC, LED, CFL | 662400676287 |
| 6100WB | 6" Tapered Metal Baffle, 2-Rings Narrow & Wide | White | Halogen, INC, LED, CFL | 080083743452 |
| RE-6125WB | 6" Full Cone Baffle | White | Halogen, INC, LED, CFL | 080083754465 |



HALO COMMERCIAL



Downlight
p. 25

HALO®

Commercial LED Lighting

HALO Commercial provides the right balance of visual comfort and energy efficiency, with proven and tested products that always meet commercial code and never break the budget.

- **Versatile.** Convenient field-changeable lenses.
- **Efficient.** Greater lumen delivery and beam distribution.
- **Selectable.** Flexibility in making final settings on-site.
- **No-Fuss.** Contractor-friendly installation.



Scan to browse HALO
Commercial videos



HALO COMMERCIAL DOWNLIGHT

PR4 SeleCCTable™ Series DOWNLIGHT

- 4-inch LED self-flanged, lensed recessed downlight
- Available in new construction and retrofit
- Field selectable lumens: 1000, 1500, 2000
- 3 selectable CCTs: 3000K, 3500K, 4000K; 80 or 90 CRI
- Exclusive medium / wide beam distribution reversible flip lens



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Selectable Lumens | Watts | UPC | ENERGY STAR ID |
|----------------|-----------------|-------------|----------------|----------------|----------|-------------------|-------|--------------|----------------|
| PR4FS12D010 | 4" Housing | Raw Finish | 26W-32W | N/A | 120-277V | 1000-2000 | 20 | 080083131839 | 2353549 |
| PR4M12MD8FSMW | 4" LED Module | Matte White | 26W-32W | 3000K-4000K | 120-277V | 1000-2000 | N/A | 080083060795 | 2353549 |
| PR4RFS12D010 | 4" Retrofit Kit | Raw Finish | 26W-32W | N/A | 120-277V | 1000-2000 | 22 | 080083132683 | 2353549 |

PR6 SeleCCTable™ Series DOWNLIGHT

- 6-inch LED self-flanged, lensed LED recessed downlight
- Available in new construction and retrofit
- Field selectable lumens: 1000, 1500, 2000
- 3 selectable CCTs: 3000K, 3500K, 4000K; 80 or 90 CRI
- Medium and wide interchangeable lens option included



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Selectable Lumens | Watts | UPC | ENERGY STAR ID |
|----------------|-----------------|-------------|----------------|----------------|-----------------------|-------------------|-------|--------------|------------------|
| PR6FS12D010 | 6" Housing | Raw Finish | 26W-32W | N/A | 120/277V 50/60 Hz | 1000-2000 | 21 | 080083892174 | 2328770 |
| PR6M12MD8FSMW | 6" LED Module | Matte White | 26W-32W | 3000K-4000K | N/A | 1000-2000 | N/A | 080083891122 | 2345484 |
| PR6RFS12D010 | 6" Retrofit Kit | Raw Finish | 26W-32W | N/A | 120V-277V 50/60 Hz | 1000-2000 | 22 | 080083891726 | 2345457, 2345484 |

PR8 SeleCCTable™ Series DOWNLIGHT

- 8-inch LED self-flanged, lensed recessed downlight
- Available in new construction and retrofit
- 3 selectable CCTs: 3000K, 3500K, 4000K; 80 CRI
- Universal input 120V-277V with 0-10V 1% dimming
- Medium and wide interchangeable lens options



| Catalog Number | Description | Finish | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | ENERGY STAR ID |
|----------------|-----------------|-------------|----------------|----------------|-------------|--------------|-------|--------------|----------------|
| PR830D010 | 8" Housing | Raw Finish | 65W | N/A | 120V-277V | 3000 | 28 | 080083771790 | 2289674 |
| PR8M34MDMW | 8" LED Module | Matte White | 65W-85W | 3000K-4000K | Low Voltage | 3000 or 4000 | N/A | 080083772940 | 2289767 |
| PR8R30D010 | 8" Retrofit Kit | Raw Finish | 65W | N/A | 120V-277V | 3000 | 28 | 080083772193 | 2289686 |

METALUX COMMERCIAL



METALUX

Commercial LED Lighting

Metalux Commercial offers a broad range of panels, troffers, striplights, wraps and flushmount solutions that feature the latest LED and driver technology for optimal performance.

- **Controllability.** Selectable options for flexibility.
- **Performance.** Delivers value and energy savings.
- **Durability.** Long service life and reduced maintenance.
- **Low Glare.** Increase comfort levels with less glare.



Scan to browse Metalux
Commercial videos



METALUX FLAT PANEL

CGT Contractor Go-To Series FLAT PANEL


- Affordable LED panel that fits in shallow plenums with room to spare; Thin 2 1/8 inch height
- Robust die-formed steel housing is post-painted for maximum durability
- Acrylic micro optics provide uniform illumination from corner to corner
- Extruded aluminum bezel with mitered corners tightly sealed to housing for durability
- Ideal for office spaces, schools, healthcare and retail merchandising areas



| Catalog Number | Description | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|----------------|----------------------|----------------|-------|----------|--------|-------|--------------|----------------|
| 22CGT3535C | 2'x2' Recessed Panel | 3-T8 | 3500K | 120/277V | 3,449 | 32 | 080083880003 | P6WE1HNZ |
| 22CGT3540C | 2'x2' Recessed Panel | 3-T8 | 4000K | 120/277V | 3,582 | 32 | 080083880027 | P0YGNM7S |
| 24CGT4535C | 2'x4' Recessed Panel | 2-T8, 3-T8 | 3500K | 120/277V | 4,268 | 38 | 080083880089 | P28JP113 |
| 24CGT4540C | 2'x4' Recessed Panel | 2-T8, 3-T8 | 4000K | 120/277V | 4,432 | 38 | 080083880102 | PLTEVMIJ |
| 24CGT4550C | 2'x4' Recessed Panel | 2-T8, 3-T8 | 5000K | 120/277V | 4,432 | 38 | 080083880126 | P8BJJLKN |
| 24CGT5535C | 2'x4' Recessed Panel | 3-T8, 4-T8 | 3500K | 120/277V | 5,139 | 47 | 080083880164 | PGQBATOL |
| 24CGT5540C | 2'x4' Recessed Panel | 3-T8, 4-T8 | 4000K | 120/277V | 5,337 | 47 | 080083880188 | P5F04P82 |

FP / FPS Series FLAT PANEL

- Ultra-thin LED flat panel; Less than 2-inches height for shallow plenums
- Fixed and selectable configurations available
- Selectable switch to set color temperature, lumens and watts desired for task
- Refined visual optics, superior acrylic light guide; uniform corner to corner illumination
- Ideal solution for office spaces, schools, healthcare facilities and retail merchandising areas



| Catalog Number | Description | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|----------------|----------------------|----------------|-------|----------|--------|-------|--------------|----------------|
| 22FP3235C | 2'x2' Recessed Panel | 3-T8 | 3500K | 120/277V | 3307 | 29 | 080083833528 | PQC9IUIC |
| 22FP3240C | 2'x2' Recessed Panel | 3-T8 | 4000K | 120/277V | 3,560 | 30 | 080083833542 | PUOIG6S2 |
| 22FP4235C | 2'x2' Recessed Panel | 2-U6T8 | 3500K | 120/277V | 4,641 | 39 | 080083833580 | P8HIK308 |
| 22FP4240C | 2'x2' Recessed Panel | 3-U6T8 | 4000K | 120/277V | 4,567 | 39 | 080083833603 | PELH4PNQ |
| 24FP4735C | 2'x4' Recessed Panel | 2-T8, 3-T8 | 3500K | 120/277V | 4,990 | 40 | 080083833641 | PRZ2RGDY |
| 24FP4740C | 2'x4' Recessed Panel | 2-T8, 3-T8 | 4000K | 120/277V | 4,858 | 40 | 080083833665 | PGY6ID6B |
| 24FP6440C | 2'x4' Recessed Panel | 3-T8, 4-T8 | 4000K | 120/277V | 6,611 | 59 | 080083833726 | PUQIRODO |

| Selectable CCT & Selectable Lumens | | | | | | | | |
|------------------------------------|----------------------|------------|-------------|----------|-------------|----|--------------|------------------------------|
| 22FPSL2SCT3 | 2'x2' Recessed Panel | 3-T8 | 3000K-4000K | 120/277V | 1,700-3,500 | 15 | 080083889402 | PIBWK9P9, PB32RP9H, PJQG8VOT |
| 24FPSL2SCT3 | 2'x4' Recessed Panel | 2-T8, 3-T8 | 3000K-4000K | 120/277V | 3,100-6,300 | 27 | 080083889365 | PK4M6K93, PZFJCMXS, PU0HKZ87 |

METALUX FLAT PANEL/TROFFER

RBG Series
FLAT PANEL

- Architectural elegant 6-inch grid, 4-inch aperture fixture
- Recessed, surface or suspension mounting
- 3 field-selectable CCT: 3000K, 3500K, 4000K; 80 CRI
- Lumen selectable: 500, 750 or 1,000 lumens per foot



| Catalog Number | Description | Replaces Up To | Selectable CCT | Voltage | Selectable Lumens | Watts | UPC | DLC Product ID |
|------------------|-------------|-----------------------------|----------------|----------|-------------------|-------|--------------|------------------------------|
| 4RBG6-SL1-L8SCT3 | 4' Length | 2-F32T8, 1-F54T5HO, 2-F28T5 | 3000K-4000K | 120/277V | 500/750/1,000* | 36 | 080083866465 | PUREBLSF, PSMWARPL, PW27GGE8 |

*Lumens per ft.

Cruze ST Recessed Series
TROFFER

- Architectural center basket lens troffer with aesthetic appeal
- Latch-less design provides clean architectural look; Ribbed, frosted acrylic lens
- High-performance LED system with advanced light distribution
- Ideal choice for commercial, institutional and healthcare facilities



| Catalog Number | Description | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|---------------------------|----------------|--------------------|-------|----------|--------|-------|--------------|--|
| 22CZ2-32-UNV-L835-CD1-U | 2'x2', Troffer | 2-T5, 2-T8 | 3500K | 120/277V | 3,280 | 26 | 080083881185 | PL057CFW (120V) , P15VC648 (277V) |
| 22CZ2-32-UNV-L840-CD1-U | 2'x2', Troffer | 2-T5, 2-T8 | 4000K | 120/277V | 3,280 | 26 | 080083881208 | P030DW27 (120V) , P8GWVDUZ (277V) |
| 22CZ2-34HE-UNV-L835-CD1-U | 2'x2', Troffer | 3-T8, 4-T8, 2-T5HO | 3500K | 120/277V | 3386 | 26 | 080083881222 | P6ZEZIGY |
| 22CZ2-34HE-UNV-L840-CD1-U | 2'x2', Troffer | 3-T8, 4-T8, 2-T5HO | 4000K | 120/277V | 3386 | 26 | 080083881260 | PMRQB66T |
| 22CZ2-39-UNV-L835-CD1-U | 2'x2', Troffer | 3-T8, 4-T8, 2-T5HO | 3500K | 120/277V | 3,943 | 34 | 080083881284 | P0AXJUK1 |
| 22CZ2-39-UNV-L840-CD1-U | 2'x2', Troffer | 3-T8, 4-T8, 2-T5HO | 4000K | 120/277V | 3,943 | 34 | 080083881307 | PU7UA6BJ |
| 24CZ2-40-UNV-L835-CD1-U | 2'x4', Troffer | 2-T8, 3-T8 | 3500K | 120/277V | 4,196 | 36 | 080083881505 | PUDYNNME |
| 24CZ2-40-UNV-L840-CD1-U | 2'x4', Troffer | 2-T8, 3-T8 | 4000K | 120/277V | 4,196 | 36 | 080083881529 | PWWGAYMY |
| 24CZ2-50-UNV-L835-CD1-U | 2'x4', Troffer | 2-T8, 2-T5 | 3500K | 120/277V | 5,015 | 48 | 080083881628 | POK3FN8Z |
| 24CZ2-50-UNV-L840-CD1-U | 2'x4', Troffer | 2-T8, 2-T5 | 4000K | 120/277V | 5,015 | 48 | 080083881642 | PI0YCHQ9 |

Note: DLC Premium items are noted in bold.

CooperKit Retrofit Kit Series
TROFFER

- 2'x2' and 2'x4' LED center basket retrofit kit is the ideal solution to upgrading existing recessed fluorescent lighting
- Engineered for quick installation in existing luminaire
- Simple and tool-less installation for labor savings
- Reduced maintenance costs due to the extended lifetime of LEDs




| Catalog Number | Description | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|--------------------------|----------------------------------|----------------|-------|----------|--------|-------|--------------|-----------------|
| 22CBRK-31-UNV-L840-CD1-U | 2'x2' Center Basket Retrofit Kit | 2-T5, 2-T8 | 4000K | 120-277V | 3168 | 21 | 080083195909 | P6PT30P6 |
| 24CBRK-42-UNV-L840-CD1-U | 2'x4' Center Basket Retrofit Kit | 2-T8, 3-T8 | 4000K | 120-277V | 4200 | 28 | 080083196203 | P1DQUGFJ |

Note: DLC Premium items are noted in bold.

METALUX TROFFER/STRIPLIGHT

Perceive Recessed Architectural Series
TROFFER

- 3D optical pattern adds dimension and visual interest on a smooth flat surface
- Low-glare solution for increased comfort level
- Extruded aluminum bezel for enhanced durability and clean finished look
- Bottom surface can be wiped down for easy cleaning and maintenance
- Ideal solution for office spaces, schools, and healthcare facilities

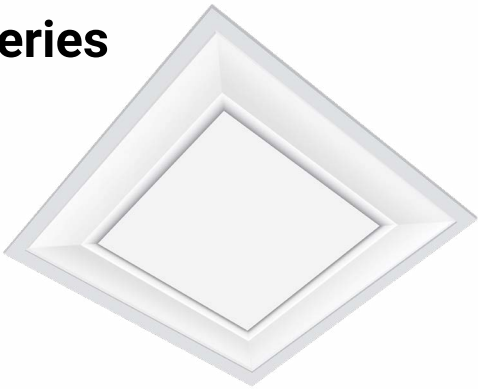

| Catalog Number | Description | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|--------------------|---------------|--------------------|-------|----------|--------|-------|--------------|----------------|
| 22PT-35-PB1-L835-U | 2'x2' Troffer | 3-T8, 4-T8, 2-T5HO | 3500K | 120-277V | 3500 | 29 | 080083253906 | DLC Pending |
| 22PT-35-PB1-L840-U | 2'x2' Troffer | 3-T8, 4-T8, 2-T5HO | 4000K | 120-277V | 3500 | 29 | 080083253913 | DLC Pending |
| 24PT-45-PB1-L835-U | 2'x4' Troffer | 2-T8, 3-T8 | 3500K | 120-277V | 4500 | 37 | 080083253920 | DLC Pending |
| 24PT-45-PB1-L840-U | 2'x4' Troffer | 2-T8, 3-T8 | 4000K | 120-277V | 4500 | 37 | 080083253937 | DLC Pending |

SkyRidge Series
TROFFER

- Recessed LED specification series with glare-reducing performance
- Affordable, aesthetically pleasing alternative to fluorescent fixtures
- Advanced optical control with optimal illumination
- Over 60% energy savings when compared to fluorescent troffers
- Ideal choice for commercial interiors



| Catalog Number | Description | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|------------------------------|-------------------------|----------------|-------|----------|--------|-------|--------------|--|
| 22SR-LD2-29-C-UNV-L835-CD1-U | 2'x2', Recessed Troffer | 2-T5, 2-T8 | 3500K | 120/277V | 3,095 | 23 | 080083752584 | PL2K2CYL(120V) , PURGNZ9E(277V) |
| 22SR-LD2-29-C-UNV-L840-CD1-U | 2'x2', Recessed Troffer | 2-T5, 2-T8 | 4000K | 120/277V | 3,157 | 23 | 080083752577 | PSRAE17C |
| 24SR-LD2-48-C-UNV-L835-CD1-U | 2'x4', Recessed Troffer | 2-T8, 2-T5 | 3500K | 120/277V | 4,805 | 38 | 080083752492 | P6V4CWNV |
| 24SR-LD2-48-C-UNV-L840-CD1-U | 2'x4', Recessed Troffer | 2-T8, 2-T5 | 4000K | 120/277V | 4,901 | 38 | 080083752485 | PDLK7ZMQ |

Note: DLC Premium items are noted in bold.

SLSTP Series
STRIPLIGHT

- LED strip light with decorative end caps and toolless lens removal
- Suitable for either single or continuous row application
- Surface, suspended or wall mounted capable
- Impact resistant polycarbonate lens reduces maintenance
- Ideal for warehouse, retail, office or retrofit applications



| Catalog Number | Description | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|------------------|----------------|----------------------|-------|----------|--------|-------|--------------|--------------------|
| 4SLSTP4040DD-UNV | 4' Single Lens | 2-T8 32W, 1-T5HO 54W | 4000K | 120/277V | 4927 | 41 | 080083705825 | PXZQGN9C, PPA1YS12 |
| 8SLSTP8040DD-UNV | 8' Single Lens | 4-T8 32W, 2-T12 75W | 4000K | 120/277V | 9304 | 79 | 080083814787 | P0K8WFD1, PARMCVA1 |

METALUX STRIPLIGHT/WRAP

SNLED Series
STRIPLIGHT

- Round lens linear LED striplights available in two sizes
- Offers excellent fixture efficiency and control versatility
- Full body strip can be paired with Sure-Lites EBP emergency options
- 0-10V dimming to 10%
- Ideal solution for commercial office, warehouses, retail, and schools



| Catalog Number | Description | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|------------------------------------|---------------|----------------------|-------|----------|--------|-------|--------------|----------------|
| 4SNLED-LD5-41SL-LW-UNV-L840-CD1-U | 4' Round Lens | 2-T8 32W, 1-T5HO 54W | 4000K | 120/277V | 4214 | 35 | 080083817078 | PJWRG9KV |
| 8TSNLED-LD5-74SL-LW-UNV-L840-CD1-U | 8' Round Lens | 4-T8 32W, 2-T12 75W | 4000K | 120/277V | 7625 | 61 | 080083852703 | PY759J1D |

ST Series
STRIPLIGHT

- Full-width LED striplight; Ideal for replacing single or 2-lamp fluorescent striplights
- Superior performance with lumens up to 9200 and 115 lumens per watt
- Unique single or dual lens tube design
- 0-10V Dimming to 10%
- Continuous row mount aligner included to add-on length as needed



| Catalog Number | Description | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|----------------|-----------------------|----------------------|-------|----------|--------|-------|--------------|----------------|
| 2ST2L2040 | 2' Dual Lens, Dimming | 2-T8 17W | 4000K | 120/277V | 2,300 | 20 | 080083150960 | PL5HYNT07O31 |
| 4ST2L4040 | 4' Dual Lens, Dimming | 2-T8 32W, 1-T5HO 54W | 4000K | 120/277V | 4,600 | 40 | 080083150984 | PLL0TV2Y232O |
| 8ST2L8040 | 8' Dual Lens, Dimming | 4-T8 32W, 2-T12 75W | 4000K | 120/277V | 9,200 | 80 | 080083151004 | PL7YD22S7XBJ |

WNLED Series
WRAP

- Utility commercial LED linear wrap
- Single or continuous row applications
- Frosted lens offers best-in-class uniform illumination
- Ideal for commercial applications including schools, institutions and retail spaces
- Provides long service life, eliminating re-lamping issues and minimizing maintenance common with traditional fluorescent



| Catalog Number | Description | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|----------------------------------|----------------|-----------------|-------|----------|--------|-------|--------------|----------------|
| 4WNLED-LD4-40SL-F-UNV-L840-CD1-U | 4' Linear Wrap | 2-T12, 2-T8 32W | 4000K | 120/277V | 4,006 | 30 | 080083756889 | PK3W95DW |

METALUX WRAP/FLUSHMOUNT

WP Series
WRAP

- Compact LED wrap light delivers value and energy savings
- Perfect retrofit solution for replacing single or 2-lamp fluorescent wraparounds
- Low-profile, highly versatile design; Post-painted die-formed channel
- Prismatic lens ensures even, glare-free light distribution
- Ideal for commercial applications from schools and dorms to warehouses and retail areas



| Catalog Number | Description | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|----------------|-------------------|----------------|-------|----------|--------|-------|--------------|----------------|
| 4WP3040C | 4' Linear Utility | 2-T8 32W | 4000K | 120/277V | 3,588 | 31 | 080083858361 | PC1Y20YN |

WPLD Series
WRAP

- Streamlined, low-profile design
- Smooth LED lens provides soft, uniform, glare-free light output
- Providing up to 60% energy savings over fluorescent light sources
- Suitable for ceiling, wall or suspension mounting
- Mounting slots allow for installation directly into the junction box with 100° of rotational freedom



| Catalog Number | Description | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|----------------|----------------|----------------|-------|----------|--------|-------|--------------|----------------|
| 4WPLD4035C | 4' Low Profile | 2-T8 32W | 3500K | 120/277V | 4,557 | 39 | 080083750603 | PZ4NNCFK |
| 4WPLD4040C | 4' Low Profile | 2-T8 32W | 4000K | 120/277V | 4,576 | 39 | 080083749676 | PYGI6R4N |


FM Dimming Series
FLUSHMOUNT

- Versatile ceiling- or wall-mount series for a broad range of applications
- 3-field selectable CCT: 3000K, 4000K and 5000K
- Full frost, opal white LED lens provides optimal light output with no pixelation
- Even, uniform light distribution; Easy lens installation
- Perfect for utility or laundry rooms, closets, dormitories and more



| Catalog Number | Description | Replaces Up To | Selectable CCT | Voltage | Lumens | Watts | UPC | ENERGY STAR ID |
|----------------|-----------------------|-----------------------------|----------------|---------|--------|-------|--------------|----------------|
| FM11WRCCR | 11" Flushmount, Round | 22 W T9 Circline | 3000K-5000K | 120V | 1,100 | 14 | 080083840151 | 2324855 |
| FM15WRCCR | 15" Flushmount, Round | 100W INC or 32W T9 Circline | 3000K-5000K | 120V | 1,800 | 22 | 080083845378 | 2324853 |

METALUX INDUSTRIAL



High Bay
p. 33-34



Vaportite
p. 34

METALUX


Industrial LED Lighting

Metalux Industrial offers a selection of economical and energy-efficient high-bay and vaportite lighting solutions designed for a wide variety of applications.

- **Affordable.** Economical, cost-saving solutions.
- **Heavy-Duty.** Rugged construction and durability.
- **Adaptable.** Designed for various mounting heights.
- **Refined Optics.** Delivers uniform illumination.



Scan to browse Metalux
Industrial videos

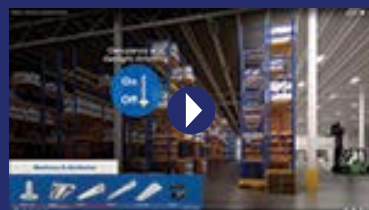

METALUX HIGH BAY

VHB Series HIGH BAY

- Designed for a wide variety of applications and mounting heights
- Precision designed optics; High impact polycarbonate optical LED lens
- Compact, lightweight design for ease of installation
- Solution for spaces utilizing traditional linear fluorescent and HID high bay
- Ideal for industrial, commercial, manufacturing and gymnasium applications



| Catalog Number | Description | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|------------------------|-------------|-----------------------|-------|----------|--------|-------|--------------|-----------------|
| VHB-12-W-UNV-L840-CD-U | Wide Distr. | 4-T8, 3-T5HO, 175W MH | 4000K | 120/277V | 12,430 | 87 | 080083785971 | P87DJGBP |
| VHB-12-W-UNV-L850-CD-U | Wide Distr. | 4-T8, 3-T5HO, 175W MH | 5000K | 120/277V | 12,773 | 87 | 080083785933 | P6MXBQOS |
| VHB-18-W-UNV-L840-CD-U | Wide Distr. | 4-T5HO, 6-T8 320W MH | 5000K | 120/277V | 18,647 | 134 | 080083785919 | P75UEXLK |
| VHB-18-W-UNV-L850-CD-U | Wide Distr. | 4-T5HO, 6-T8 320W MH | 4000K | 120/277V | 19,160 | 134 | 080083785902 | PIIJDELY |
| VHB-24-W-UNV-L840-CD-U | Wide Distr. | 6-T5HO, 8-T8, 400W MH | 5000K | 120/277V | 23,057 | 174 | 080083815708 | PJ92YFP9 |
| VHB-24-W-UNV-L850-CD-U | Wide Distr. | 6-T5HO, 8-T8, 400W MH | 4000K | 120/277V | 23,692 | 174 | 080083818365 | PH575GE1 |

Lumen Selectable

| | | | | | | | | |
|--------------------------|---------------|--|-------|----------|---------------|-----|--------------|-------------------------------|
| VHB-1215-W-UNV-L840-CD-U | Wide Distr. | 4-T8, 3-T5HO, 175W MH | 4000K | 120/277V | 12,000-15,000 | 110 | 080083192304 | PJHJOBPH |
| VHB-1215-W-UNV-L850-CD-U | Wide Distr. | 4-T8, 3-T5HO, 175W MH | 5000K | 120/277V | 12,000-15,000 | 110 | 080083192311 | PQX68N7B |
| VHB-1824-W-UNV-L840-CD-U | Wide Distr. | 4-T5HO, 6-T8 320W MH, 6-T5HO, 8-T8, 400W MH | 4000K | 120/277V | 18,000-24,000 | 158 | 080083192328 | PKWWO6XP |
| VHB-1824-W-UNV-L850-CD-U | Wide Distr. | 4-T5HO, 6-T8 320W MH, 6-T5HO, 8-T8, 400W MH | 5000K | 120/277V | 18,000-24,000 | 158 | 080083192335 | PMKN6560 |
| VHB-1824-N-UNV-L840-CD-U | Narrow Distr. | 4-T5HO, 6-T8 320W MH, 6-T5HO, 8-T8, 400W MH | 4000K | 120/277V | 18,000-24,000 | 158 | 080083194834 | P3BAS5NV, P9EQ8NS7 |
| VHB-1824-N-UNV-L850-CD-U | Narrow Distr. | 4-T5HO, 6-T8 320W MH, 6-T5HO, 8-T8, 400W MH | 5000K | 120/277V | 18,000-24,000 | 158 | 080083194841 | PHUOFDKN, PHFFBWZM |

Note: DLC Premium items are noted in bold.

LHB Series HIGH BAY

- Economical high bay/low bay LED linear industrial luminaire
- Designed for a wide variety of applications and mounting heights
- Standard diffused lens provides added protection and glare control
- Energy-efficient, one-for-one replacement of linear fluorescent and HID fixtures
- Perfect for industrial, manufacturing, gymnasium and warehouse applications



| Catalog Number | Description | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|----------------------|-----------------------|-----------------------|-------|----------|--------|-------|--------------|---------------------|
| LHB-12-UNV-L840-CD-U | Lensed, Medium Distr. | 4-T8, 3-T5HO, 175W MH | 4000K | 120/277V | 11,455 | 87 | 080083859160 | PLCCRS3FP14Q |
| LHB-12-UNV-L850-CD-U | Lensed, Medium Distr. | 4-T8, 3-T5HO, 175W MH | 5000K | 120/277V | 11,493 | 87 | 080083859184 | PLFXQYAHETOA |
| LHB-18-UNV-L840-CD-U | Lensed, Medium Distr. | 4-T5HO, 6-T8 320W MH | 4000K | 120/277V | 17,075 | 132 | 080083859207 | PLYPCB02RW1Y |
| LHB-18-UNV-L850-CD-U | Lensed, Medium Distr. | 4-T5HO, 6-T8 320W MH | 5000K | 120/277V | 17,129 | 132 | 080083859221 | PLEM5HU7PSWK |
| LHB-24-UNV-L840-CD-U | Lensed, Medium Distr. | 6-T5HO, 8-T8, 400W MH | 4000K | 120/277V | 22,012 | 172 | 080083859245 | PLWL6C907D14 |
| LHB-24-UNV-L850-CD-U | Lensed, Medium Distr. | 6-T5HO, 8-T8, 400W MH | 5000K | 120/277V | 22,050 | 172 | 080083859269 | PLQ5XUSDH4JX |

Note: DLC Premium items are noted in bold.

UHB Series
HIGH BAY

- Designed for a variety of mounting heights and applications
- Traditional round form factor and compact design allow for easy installation
- Specialty designed LED lens provides optimal distribution and reduced high angle glare
- Universal mounting allows for quick retrofit installations



| Catalog Number | Description | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|----------------------|----------------------------|-----------------------|-------|----------|--------|-------|--------------|---------------------|
| UHB-12-UNV-L840-CD-U | Round, Die Cast, MD Distr. | 4-T8, 3-T5HO, 175W MH | 4000K | 120/277V | 13,436 | 99 | 080083885862 | PLSZJNKFXWRM |
| UHB-12-UNV-L850-CD-U | Round, Die Cast, MD Distr. | 4-T8, 3-T5HO, 175W MH | 5000K | 120/277V | 13,672 | 100 | 080083885886 | PL625202A764 |
| UHB-18-UNV-L840-CD-U | Round, Die Cast, MD Distr. | 6-T8, 4-T5HO, 320W MH | 4000K | 120/277V | 19,607 | 147 | 080083885909 | PLIB2FPH8U2B |
| UHB-18-UNV-L850-CD-U | Round, Die Cast, MD Distr. | 6-T8, 4-T5HO, 320W MH | 5000K | 120/277V | 19,654 | 150 | 080083885923 | PLTP5ROQLF89 |
| UHB-24-UNV-L840-CD-U | Round, Die Cast, MD Distr. | 6-T5HO, 8-T8, 400W MH | 4000K | 120/277V | 26,600 | 197 | 080083885947 | PLDTKQOEQCF8 |
| UHB-24-UNV-L850-CD-U | Round, Die Cast, MD Distr. | 6-T5HO, 8-T8, 400W MH | 5000K | 120/277V | 26,664 | 197 | 080083885961 | PLPWY41J5ISI |
| UHB-30-UNV-L840-CD-U | Round, Die Cast, MD Distr. | (6)T5HO 54W, 400W HID | 4000K | 120/277V | 30,000 | 137 | 080083885985 | PLPDU641UFT8 |
| UHB-30-UNV-L850-CD-U | Round, Die Cast, MD Distr. | 6-T5HO, 8-T8, 400W MH | 5000K | 120/277V | 32,725 | 239 | 080083886005 | PLX5IWPVBKD0 |

Note: DLC Premium items are noted in bold.

APVT Series
VAPORTITE

- Compact and durable LED vaportite fixture; Ideal for wet location environments
- Sealed and gasketed polycarbonate housing with a high impact polycarbonate lens
- Rated for -20°C to 30°C
- High-performance efficacy up to 132 lumens per watt
- Ideal applications include canopy, warehouse and light commercial



| Catalog Number | Description | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|----------------|-----------------|----------------|-------|----------|--------|-------|--------------|----------------------------|
| 4APVTLD-40L840 | 4' Fixed Output | 2-T8, 1-T5HO | 4000K | 120/277V | 5,159 | 39 | 080083801305 | PLR6T8MUGK5V, PLZRPNZA9RE |
| 4APVTLD-54L840 | 4' Fixed Output | 2-T8, 1-T5HO | 4000K | 120/277V | 6,209 | 39 | 080083802166 | PLTWAYKH8VFL, PLOQO0RWAUWV |


VT Series
VAPORTITE

- Contemporary surface-mount fixture featuring rugged and durable construction
- Sealed and gasketed, reinforced fiberglass housing with a high impact lens
- Internal fasteners and tethers provide maximum protection and rigidity
- Optical performance for interior and exterior applications; IP65 certified; NSP Listed
- Ideal for parking garages, food processing, canopy, manufacturing and complex environments



| Catalog Number | Description | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|-----------------------------|-----------------|----------------|-------|----------|--------|-------|--------------|--|
| 4VT3-LD5-4-G-UNV-L840-CD1-U | 4' Fixed Output | 2-T8, 1-T5HO | 4000K | 120/277V | 4,428 | 32 | 080083851867 | PA8HYRMS, P2K0S9SX, PMRYYSZ, PJRKZ2U5, PVSGY9IF |
| 4VT3-LD5-6-G-UNV-L840-CD1-U | 4' Fixed Output | 3-T8, 1-T5HO | 4000K | 120/277V | 6,490 | 51 | 080083851447 | P8U3H2QZ, PC8KZKBM, PDEVIYK6, P988IFAC |

Note: DLC Premium items are noted in bold.

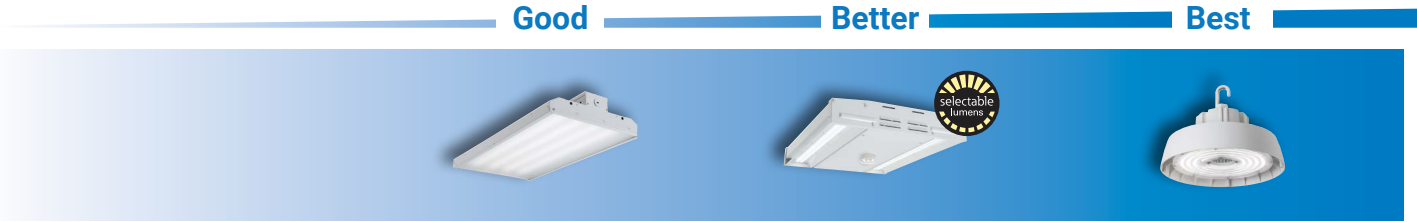

| | | LHB | VHB | UHB |
|----------------------------|----------------------------------|-----------------|------------------------------------|-----------------|
| APPLICABILITY ¹ | Big Box Retail | ★ | ★ | ★★ |
| | Sports / Recreation | ★★ | ★★ | ★★ |
| | Warehouses | ★★★ | ★★★ | ★★ |
| | Manufacturing | ★★ | ★★ | ★★ |
| | Cold Storage | ★ | ★★★ | ★ |
| | Large Indoor | | | |
| | Complex Environments | | ★ | ★★ |
| FEATURES / PERFORMANCE | Lumen Range | 12,000 - 36,000 | 9,000 - 24,000 | 12,000 - 30,000 |
| | Selectable Lumens | N/A | 12,000 - 15,000 or 18,000 - 24,000 | N/A |
| | Efficacy (Max) | 140 lm/W | 147 lm/W | 137 lm/W |
| | CRI | 80 | 70, 80, 90 | 80 |
| | Distribution | M | N, W | M |
| | Sizes | 13" x 2' & 4' | < 2' | 12" Dia |
| | Housing ² | CRS | CRS / Extruded | Diecast |
| | Lensing | Acrylic | Polycarbonate | Polycarbonate |
| | Uplight | None | None | None |
| | Life (@ 60K hrs) | L84 | L83 | L91 |
| | Ambient Range | -20C to 50C | -40C to 40C | -40C to 45C |
| | Emergency | None | Remote | None |
| | Ratings | Damp | Damp | IP65 |
| | DLC | Premium | Standard, Premium | Premium |
| INTEGRATED CONTROLS | Basic Occupancy | | ✓ | |
| | Stand Alone Daylight / Occupancy | | ✓ | |
| | WaveLinx | | ✓ | |
| | LumaWatt Pro ³ | | ✓ | |

Notes: 1. ★★★ = high applicability, ★★ = medium applicability, ★ = low applicability, blank = non-applicable
2. CRS=Cold-rolled Steel, Extruded= Extruded Aluminum, Diecast=Diecast Aluminum.
3. Location data for asset tracking.

For certification information and to download this guide, visit Cooperlighting.com/MarketPro

Compatible Controls

High Bay Fixture Mount Sensor

Warehouse facilities must meet requirements of ASHRAE Standard 90.1 2010. The High Bay Fixture Mount Sensor solves this by meeting and exceeding those requirements.

See page 37



GREENGATE CONTROLS



Wall Switch
p. 37



Sensor
p. 38-39

GREENGATE


Controls Collection

From simple on/off switches to dimmers and sensors, Greengate offers a variety of code compliant controls solutions.

- **Compliant.** Meet energy codes and standards.
- **Easy Install.** Saves on labor costs.
- **Convenience.** Delivers combined functionality.



Scan to browse Greengate Controls videos

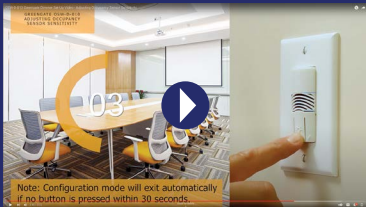

GREENGATE WALL SWITCH

0-10V WBSD Decorator Dimmer WALL SWITCH

- Provides a full-range of linear-slide dimming control of 0-10V compatible light sources
- Allows user to return to previous light level when turning lights ON
- Can be used in single-pole (1 location) and 3-way (multi-location) applications
- Neutral wire is not required for installation of device
- Ideal for light commercial applications; Compatible with decorator style devices and wallplates



| Catalog Number | Description | Finish | Voltage | UPC |
|----------------|------------------------|----------------------------|-----------|--------------|
| WBSD-010DEC-C1 | 0-10V Decorator Dimmer | White, Ivory, Almond | 120V/277V | 080083735266 |
| WBSD-010DEC-C2 | 0-10V Decorator Dimmer | White, Ivory, Light Almond | 120V/277V | 080083735273 |

0-10V WBSD Preset Slide Dimmer WALL SWITCH

- Full-travel slide control; LED ready
- Class 1 or Class 2 wiring capabilities
- Can be used in single-pole (1 location) and 3-way (multi-location) applications
- Works with the SP20-RD4 or directly controls the load
- White face assembled on device, Ivory and Light Almond color change kits included



| Catalog Number | Description | Finish | Voltage | UPC |
|----------------|---------------------------|--------|-------------|--------------|
| WBSD-010M-C1 | 0-10V Preset Slide Dimmer | White | 120/277 VAC | 080083834983 |

0-10V OSW Wallbox Dimmer Sensor WALL SWITCH

- 3-in-1 solution that combines functionality of a switchpack, a sensor and a 0-10V dimmer
- Saves labor costs, reduces installation time and meets energy codes and standards
- 0-10V dimming with passive infrared (PIR) occupancy sensing; Surge protection built-in
- Can be used in single-pole (1 location) as well as 3-way (multi-location) applications
- Compatible with Cooper Lighting Solutions' decorator style devices and wallplates



| Catalog Number | Description | Finish | Voltage | Watts | Detection Type | Coverage | UPC |
|----------------|------------------------------|--------|----------|-------------|----------------|--------------|--------------|
| OSW-P-010-W | 0-10V Wallbox Dimmer, Sensor | White | 120/277V | 1200W/2200W | PIR | 1000 sq. ft. | 080083758661 |

0-10V Dual Tech Occupancy Dimmer
SENSOR

- 3-in-1 solution that combines functionality of a switchpack, a sensor and a 0-10V dimmer
- Saves labor costs, reduces installation time and meets energy codes and standards
- Ultrasonic occupancy (US) and passive infrared (PIR) sensing; Daylight harvesting
- Can be used in single-pole (1 location) as well as 3-way (multi-location) applications
- Compatible with Cooper Lighting Solutions' decorator style devices and wallplates



| Catalog Number | Description | Finish | Voltage | Watts | Detection Type | Coverage | UPC |
|----------------|--------------------------|--------|----------|------------|--------------------|-------------|--------------|
| OSW-D-010-W | 0-10V Dimmer, OCC Sensor | White | 120/277V | 960W/2200W | PIR and Ultrasonic | 1000 sq ft. | 080083816071 |

NeoSwitch ONW Occupancy Wall Switch
SENSOR

- Passive Infrared (PIR) single level occupancy sensing switch for motion sensing control
- Also a conventional wall switch; Designed for energy savings and convenience
- Detects motion from a heat-emitting source (such as a person entering a room) within its field-of-view and automatically switches lights ON
- Neutral and non-neutral wiring options for installation; Ideal for retrofit applications



| Catalog Number | Description | Finish | Voltage | Watts | Detection Type | Coverage | UPC |
|-------------------|---|--------|----------|-------------|--------------------|-------------|--------------|
| ONW-P-1001-MV-W | PIR Wall Sensor | White | 120/277V | 1200W/2200W | PIR | 1000 sq ft. | 080083523863 |
| ONW-D-1001-MV-W | Dual Tech Wall Sensor | White | 120/277V | 1200W/2200W | PIR and Ultrasonic | 1000 sq ft. | 080083524709 |
| ONW-D-1001-MV-N-W | Dual Tech Wall Sensor, Neutral Required | White | 120/277V | 1200W/2200W | PIR and Ultrasonic | 1000 sq ft. | 080083524594 |



OAC MicroSet Dual Tech Ceiling Mount
SENSOR

- Combines ultrasonic and Passive Infrared (PIR) technologies, eliminates false deactivations
- MicroSet self-adjusting technology provides an adaptive and airflow tolerant technology
- Ideal for spaces that have increased airflow due to higher occupant levels
- Drastically simplifies and reduces installation and adjustment time
- Available in line-voltage and low-voltage versions; Compatible with SP20 switchpacks



| Catalog Number | Description | Finish | Voltage | Watts | Detection Type | Coverage | UPC |
|----------------|-----------------------------------|--------|----------|-------------|--------------------|-------------|--------------|
| OAC-DT-2000-MV | DT Ceiling Mount, Line Voltage | White | 120-347V | 1200W-2700W | PIR and Ultrasonic | 2000 sq ft. | 080083579426 |
| OAC-DT-2000 | DT Ceiling Mount, Low Voltage | White | 10-30VDC | N/A | PIR and Ultrasonic | 2000 sq ft. | 080083579266 |
| OAC-DT-2000-R | DT Ceiling Mount, Isolated Relay | White | 10-30VDC | N/A | PIR and Ultrasonic | 2000 sq ft. | 080083702077 |
| OAC-DT-1000 | DT Ceiling Mount, Low Voltage | White | 10-30VDC | N/A | PIR and Ultrasonic | 1000 sq ft. | 080083579242 |
| OAC-DT-1000-R | DT Ceiling Mount, Isolated Relay | White | 10-30VDC | N/A | PIR and Ultrasonic | 1000 sq ft. | 080083702060 |
| OAC-DT-0501 | DT Ceiling Mount, Low Voltage | White | 10-30VDC | N/A | PIR and Ultrasonic | 500 sq ft. | 080083579228 |
| OAC-P-1500-R | PIR Ceiling Mount, Isolated Relay | White | 10-30VDC | N/A | PIR | 1500 sq ft. | 080083579150 |

High Bay Fixture Mount
SENSOR

- Fixture-mount high bay/low bay occupancy sensor with integrated photocell
- Provides 0-10V control and 1-100% continuous dimming
- 2 interchangeable 360° high bay and low bay lenses; specifically designed for LED fixture control
- Easy to program; Quicksnap feature for easy installation
- Suitable for use in standard and cold storage applications




| Catalog Number | Description | Finish | Voltage | Watts | Detection Type | Coverage | UPC |
|----------------|----------------------|--------|----------|-------|----------------|--------------|--------------|
| OEF-P-010V-MV | Fixture Mount Sensor | White | 120/277V | 1200 | PIR | 1,500 sq ft. | 080083758104 |

SURE-LITES | ALL-PRO | ATLITE

EXIT & EMERGENCY



Sure-Lites
p. 41-43



All-Pro
p. 43-44



AtLite
p. 44-45

SURE-LITES | ALL-PRO ATLITE


Exit & Emergency Brands

Sure-Lites, All-Pro and AtLite offer reliable and code compliant solutions for all your exit and emergency needs.

- **Sure-Lites.** Patented value engineering features.
- **All-Pro.** Value focused LED products.
- **Atlite.** Compliant to New York City code.



Scan to browse Exit & Emergency videos

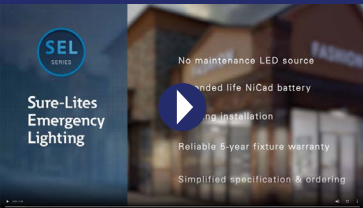

SURE-LITES EMERGENCY LIGHTING

Innovative Design. Dependable. ▶▶▶

Sure-Lites offers emergency lighting fixtures, exit signs and battery packs, including Chicago and New York code compliant solutions ideal for commercial and industrial applications.

SEL Series EMERGENCY LIGHTING

- Designed to reduce egress system cost and maintenance and improve reliability
- Proprietary adjustable AccuLED Optics™ and injection-molded, high-impact thermoplastic
- Long life LED's, no maintenance nickel cadmium battery
- EZ hang feature reduces installation time and cost
- Labor savings self-diagnostics available in SD models



| Catalog Number | Description | Finish | Replaces Up To | Coverage | Voltage | Watts | UPC |
|----------------|---------------------------------|--------|-------------------|----------|----------|------------|--------------|
| SEL17 | 2 Head, NiCad | White | 2-5.4W INC. Heads | 17 ft. | 120-277V | 0.78W | 080083722143 |
| SEL25 | 2 Head, NiCad | White | 2-9W INC. Heads | 25 ft. | 120-277V | 0.6W/0.64W | 080083736669 |
| SEL25SD | 2 Head, NiCad, Self-Diagnostics | White | 2-9W INC. Heads | 25 ft. | 120-277V | 0.67 | 080083723027 |
| SEL50 | 2 Head, NiCad | White | 2-12W INC. Heads | 50 ft. | 120-277V | 1W/1.02W | 080083733347 |
| SEL50SD | 2 Head, NiCad, Self-Diagnostics | White | 2-12W INC. Heads | 50 ft. | 120-277V | 1.19 | 080083733361 |

SELW Outdoor Series EMERGENCY LIGHTING

- Code compliant, wet location for outdoor use; Standard 0°C to 40°C temperature rating
- Designed to reduce egress system cost and maintenance and improve reliability
- Proprietary adjustable AccuLED Optics™; 25 feet of emergency egress coverage
- Injection-molded, high-impact thermoplastic
- Long life LED's, No maintenance nickel cadmium battery



| Catalog Number | Description | Finish | Replaces Up To | Coverage | Voltage | Watts | UPC |
|----------------|--------------------------|--------|----------------|----------|----------|-------|--------------|
| SELW25BZ | 2 Rotatable Heads, NiCad | Bronze | 2-9W INC Heads | 25 ft. | 120-277V | 1.4 | 080083764037 |

XR Series EMERGENCY LIGHTING

- Emergency light with minimum of 90 minutes runtime; Chicago and New York City compliant
- 20-gauge sheet metal housing; Heads are fully adjustable and 300 lumens each
- Designed to reduce egress system cost and maintenance and improve reliability
- Proprietary adjustable AccuLED Optics™, No maintenance nickel cadmium battery
- External battery disconnect and EZ Hang feature reduces installation time and cost



| Catalog Number | Description | Finish | Replaces Up To | Coverage | Voltage | Watts | UPC |
|----------------|--------------|--------|-----------------|----------|----------|-------|--------------|
| XR6C-LED | Steel, NiCad | White | 2-12W INC Heads | 60 ft. | 120-277V | 1.7 | 080083753215 |

CHX Series
EXIT SIGNAGE

- Chicago code compliant exits are ideal for general purpose applications
- Extensive range of field-installed accessories and choice of faces
- Ceiling and end mounting; Lens installs from side of fixture for convenient maintenance
- Durable steel construction and attractive styling
- High-efficiency illumination; Compatible in commercial, institutional and multi-housing applications



| Catalog Number | Description | Finish | Replaces Up To | Coverage | Voltage | Watts | UPC |
|----------------|--------------------------------|--------|------------------|----------|----------|-------|--------------|
| CHX60 | AC Powered, Steel | White | 2-12 W INC Heads | N/A | 120/277V | 3 | 080083573615 |
| CHX61 | AC Powered, Steel | White | 2-12 W INC Heads | N/A | 120/277V | 3 | 080083574629 |
| CHX70 | Self Powered, Steel | White | 2-12 W INC Heads | N/A | 120/277V | 3 | 080083576753 |
| CHX71 | Self Powered, Steel | White | 2-12 W INC Heads | N/A | 120/277V | 3 | 080083567614 |
| CHXC71 | Self Powered Combo Unit, Steel | White | 2-12 W INC Heads | 60 ft. | 120/277V | 3.6 | 080083771271 |

EBP Series
EMERGENCY BATTERY PACKS

- Battery Pack automatically switches to emergency mode when AC power fails
- Maintains illumination of an LED fixture for a minimum of 90 minutes
- UL 924 classified for field retrofit installation
- Guaranteed compatibility with Cooper Lighting Solutions' LED fixtures with accessible LED drivers
- Labor savings self-diagnostics available in SD models



| Catalog Number | Description | Voltage | Watts | UPC |
|----------------|--|----------|-------|--------------|
| EBPLED7W | Emergency Battery Pack | 120/277V | 7 | 080083732265 |
| EBPLED14W | Emergency Battery Pack | 120/277V | 14 | 080083732272 |
| EBPLED-7.5WSD | Emergency Battery Pack, Self-Diagnostics | 120/277V | 7.5 | 080083158621 |
| EBPLEDLP-10WSD | Emergency Battery Pack, Self-Diagnostics | 120/277V | 10 | 080083158645 |
| EBPLED14WSD | Emergency Battery Pack, Self-Diagnostics | 120/277V | 14 | 080083191529 |

EBP Fluorescent Series
EMERGENCY BATTERY PACKS

- Battery Pack automatically switches to emergency mode when AC power fails
- Powers a fluorescent lamp for 90 minutes during a power outage
- UL 924 classified for field retrofit installation
- Compatible with most linear florescent lamps



| Catalog Number | Description | Voltage | Watts | UPC |
|----------------|------------------------|----------|-------|--------------|
| EBP500 | Emergency Battery Pack | 120/277V | 2.7 | 080083906741 |
| EBP1400 | Emergency Battery Pack | 120/277V | 3.8 | 080083912162 |

AP2SQ Series
EMERGENCY LIGHTING

- LED emergency light with a minimum of 90 minutes of run time
- Compact form factor optimizes aesthetics
- Adjustable square heads maximize design flexibility; Each head outputs 80 lumens
- No maintenance nickel cadmium battery
- Universal j-box mounting pattern and snap-fit polycarbonate housing construction reduces installation time



| Catalog Number | Description | Finish | Replaces Up To | Coverage | Voltage | Watts | UPC |
|----------------|---------------|--------|----------------|----------|----------|-----------|--------------|
| AP2SQLED | 2 Head, NiCad | White | 2-5W INC.Heads | 12 ft. | 120/277V | 2 at 277V | 080083824922 |

Compact Design. Value Focused. ▶▶▶

All-Pro offers a broad line of compact and affordable LED emergency lighting fixtures designed last in both commercial and industrial applications.

APEL Series
EMERGENCY LIGHTING

- Emergency light with a minimum of 90 minutes of run time
- No maintenance nickel cadmium battery
- Fully adjustable LED heads maximizes design flexibility
- Compact form factor optimizes aesthetics; Components are injection-molded, high impact thermoplastic
- Universal j-box mounting pattern and snap-fit housing construction reduce installation time



| Catalog Number | Description | Finish | Replaces Up To | Coverage | Voltage | Watts | UPC |
|----------------|--------------------------------|--------|------------------|----------|----------|----------------|--------------|
| APEL | 2 Head, NiCad | White | 2-5.4W INC Heads | 17 ft. | 120/277V | 0.47W at 277V | 080083566501 |
| APELH2 | 2 Head, Nicad, Remote Capacity | White | 4-5.4W INC Heads | 34 ft. | 120/277V | 0.8 W at 277 V | 080083804986 |

APX Series
EMERGENCY LIGHTING

- Economical LED exit sign for general purpose applications
- Durable, injection-molded, thermoplastic material resists discoloration due to UV radiation
- Energy-efficient, low-maintenance LED's provide bright illumination
- Universal configurations (single- and double-face); Universal mounting (ceiling, wall and end)



| Catalog Number | Description | Finish | Voltage | Watts | UPC |
|----------------|--------------------------|--------|----------|---------------|--------------|
| APX7G | Self Powered, Unv. Green | White | 120/277V | 1.05W at 277V | 080083566549 |
| APX7R | Self Powered, Unv. Red | White | 120/277V | 1.14W at 277V | 080083566532 |

APC Combo Series
EMERGENCY LIGHTING

- Economical LED combo unit; Exit and LED emergency lighting heads
- Durable, injection-molded, thermoplastic material resists discoloration due to UV radiation
- Energy-efficient, low-maintenance LED's provide bright illumination
- Universal configurations (single- and double-face); Universal mounting (ceiling, wall and end)
- Low-voltage disconnect, Line-Latched; Brownout circuit



| Catalog Number | Description | Finish | Replaces Up To | Coverage | Voltage | Watts | UPC |
|----------------|---------------------------------|--------|-------------------|----------|----------|---------------|--------------|
| APC7G | 2 Heads, Unv. Green | White | 2-5.4W INC. Heads | 17 ft. | 120/277V | 1.68W at 277V | 080083567164 |
| APC7R | 2 Heads, Unv Red | White | 2-5.4W INC. Heads | 17 ft. | 120/277V | 1.68W at 277V | 080083566556 |
| APCH7G | 2 Heads, Unv Green, Remote Cap. | White | 4-5.4W INC. Heads | 34 ft. | 120/277V | 1.68W at 277V | 080083567188 |
| APCH7R | 2 Heads, Unv. Red, Remote Cap. | White | 4-5.4W INC. Heads | 34 ft. | 120/277V | 1.68W at 277V | 080083567171 |

APWR Series
EMERGENCY LIGHTING

- Emergency lighting remote heads unit; Allows for 17 feet of emergency egress coverage
- Adjustable heads adjust 80° from vertical with 358° rotation
- Wet location listed and can be used indoors or outdoors
- Injection-molded thermoplastic material
- Universal mounting plate; Flame-resistant and impact-resistant




| Catalog Number | Description | Finish | Replaces Up To | Coverage | Voltage | Watts | UPC |
|----------------|---------------------------------|--------|-------------------|----------|---------|-------|--------------|
| APWR2 | Remote Emergency Lamps, 2 Heads | White | 2-5.4W INC. Heads | 17 ft. | 3.6V | 1W | 080083608584 |

Durable Design. Built-to-Last. ▶▶▶

Atlite offers durable and dependable emergency lighting and exits for commercial and industrial applications that are also approved for the New York City market.

RCS Combo Series
EXIT SIGNAGE

- New York City compliant LED combo exit sign
- Heavy-duty, 20-gauge steel housing and face plate provides durability
- Energy-efficient, long-life LED's; illuminated by field-replaceable LED strip
- Single or double face with maximum of three heads for ultimate flexibility



| Catalog Number | Description | Finish | Replaces Up To | Voltage | Watts | UPC |
|----------------|-----------------------------------|--------|------------------|----------|-------|--------------|
| RCS183LED | Steel Combo, 1 face, 3 heads | White | 3 12W INC. Heads | 120/277V | N/A | 080083574308 |
| RCS283LED | Steel Combo, double face, 3 heads | White | 3 12W INC. Heads | 120/277V | N/A | 080083574292 |
| RCS182LED | Steel Combo, 1 face, 2 heads | White | 2 12W INC. Heads | 120/277V | N/A | 080083574322 |
| RCS282LED | Steel Combo, double face, 2 heads | White | 2 12W INC. Heads | 120/277V | N/A | 080083574315 |



Rival RXS Series
EXIT SIGNAGE

- New York City compliant steel LED exit sign
- Heavy-duty, 20-guage steel housing with canopy
- Energy-efficient, long-life LED's; illuminated by field-replaceable LED strip
- Universal configurations (single- and double-face); Universal mounting (ceiling, wall and end)



| Catalog Number | Description | Finish | Voltage | Watts | UPC |
|----------------|--------------------------------------|--------|----------|-------|--------------|
| RXSN8RU | Steel Exit, Self Powered, Univ. Face | White | 120/277V | 5 | 080083634576 |



REL Series
EMERGENCY LIGHTING

- New York City compliant steel LED emergency light
- Heavy-duty, 20-guage steel housing and face plate for maximum durability
- Long-lasting, high-efficiency LED heads; maintenance-free nickel cadmium battery
- Brownout protection; low-voltage disconnect



| Catalog Number | Description | Finish | Replaces Up To | Voltage | Watts | UPC |
|----------------|---|--------|-----------------|----------|-------|--------------|
| 10REL36-LED42 | Steel Emergency Light, 2 heads, 2 remotes | White | 2 9W INC. Heads | 120/277V | 5 | 080083574353 |
| 10REL72-LED83 | Steel Emergency Light, 3 heads, 5 remotes | White | 2 9W INC. Heads | 120/277V | 5 | 080083574339 |



AUX Edge-Lit Exit Series
EXIT SIGNAGE

- Edge-lit Exit allows seamless presence in architecturally significant surroundings
- Labor savings self-diagnostics, New York City compliant
- Universal mounting; Universal Lens (clear, mirror, white and single- and double-sided)
- Ordering and installation simplified as all housing and lens options are included



| Catalog Number | Description | Finish | Voltage | Watts | UPC |
|----------------|--|--------|----------|--------------|--------------|
| AUXSSD | Unv. Self powered, Self-Diag. | Silver | 120/277V | 1.1 at 277 V | 080083703296 |
| AUXSSD6 | Unv. Edge Lit, Self powered | Silver | 120/277V | 0.9/1.1W | 080083718115 |
| AUXSSD-SP PACK | Unv. Self powered, Self-Diag., Single Pack | Silver | 120/277V | 1.1 at 277 V | 080083848669 |



ATLEMINI Series
EMERGENCY LIGHTING


- New York City compliant LED emergency light with 90 minutes of run time
- J-box and conduit knockouts for easy installation; wall or ceiling mount applications
- Long-lasting, energy-efficient LED heads; maintenance-free nickel cadmium battery
- Available with two or three 80 lumen rotatable heads



| Catalog Number | Description | Finish | Replaces Up To | Coverage | Voltage | Watts | UPC |
|----------------|--|--------|----------------|----------|----------|--------|--------------|
| ATLEMINI-2H | Steel Emergency Light, 2 Rotable Heads | White | 5.4 W INC | 18 ft. | 120-277V | 0.78 W | 080083836079 |
| ATLEMINI-3H | Steel Emergency Light, 3 Rotable Heads | White | 5.4 W INC | 27 ft. | 120-277V | 0.78 W | 080083836093 |



LUMARK OUTDOOR



Wall Mount
p. 47-48



Ceiling Mount
p. 49



Floodlight
p. 49



Area/Site
p. 50-51

LUMARK


Outdoor LED Luminaires

Lumark offers a wide selection of high-quality product solutions that provide market-leading ease of installation, superior area safety, and maximum energy savings in commercial and industrial spaces.

- **Easy Installation.** Versatile mounting options.
- **Superior Area Safety.** High-performing illumination.
- **Maximum Durability.** Built-to-last construction.



Scan to browse Lumark
Outdoor videos

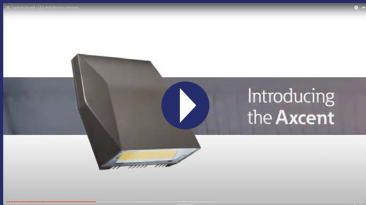

LUMARK WALL MOUNT

AXC Axcet Luminaire WALL MOUNT

- Full cutoff and refractive LED lens models available in small or large
- Hook-N-Lock mechanism for quick, easy installation
- Die-cast aluminum construction with energy-efficient illumination
- Gasketed housing and sealed optical compartment making impervious to contaminants
- Ideal for pathway illumination and floodlighting applications



| Catalog Number | Description | Finish | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|----------------|-----------------------|---------------|----------------|-------|----------|--------|-------|--------------|--------------------|
| AXCS1A | Small Full Cutoff | Carbon Bronze | 70W HID | 4000K | 120-277V | 1,806 | 14 | 080083887965 | PM2QBCKN, P6C9PUNY |
| AXCS2A | Small Full Cutoff | Carbon Bronze | 100W HID | 4000K | 120-277V | 2,561 | 21 | 080083887989 | P7QPNUH6, PSBR7D60 |
| AXCS3A | Small Full Cutoff | Carbon Bronze | 150W HID | 4000K | 120-277V | 3,537 | 27 | 080083888009 | PVRJ2Q9Q, PTFQ0X79 |
| AXCS4A | Small Full Cutoff | Carbon Bronze | 250W HID | 4000K | 120-277V | 5,520 | 44 | 080083888023 | PI16J9U0, POMJ1T2K |
| AXCS4ARL | Small Refractive Lens | Carbon Bronze | 250W HID | 4000K | 120-277V | 5,858 | 44 | 080083888030 | PPXSGJ9K, PCFKRFBV |
| AXCS5A | Small Full Cutoff | Carbon Bronze | 320W HID | 4000K | 120-277V | 6,300 | 52 | 080083888047 | PHKFITX6, PCPDYSZM |
| AXCL6A | Large Full Cutoff | Carbon Bronze | 320W HID | 4000K | 120-277V | 7,594 | 56 | 080083811564 | PFN4XXRX |
| AXCL6ARL | Large Refractive Lens | Carbon Bronze | 320W HID | 4000K | 120-277V | 7,809 | 56 | 080083811649 | PZXNXUOI |
| AXCL8A | Large Full Cutoff | Carbon Bronze | 400W HID | 4000K | 120-277V | 9,696 | 72 | 080083811588 | PG4TJNY3 |
| AXCL8ARL | Large Refractive Lens | Carbon Bronze | 400W HID | 4000K | 120-277V | 9,970 | 72 | 080083811663 | PBA84MB6 |
| AXCL10A | Large Full Cutoff | Carbon Bronze | 400W HID | 4000K | 120-277V | 13,283 | 102 | 080083811601 | PEEEJWAF |
| AXCL12A | Large Full Cutoff | Carbon Bronze | 450W HID | 4000K | 120-277V | 16,823 | 123 | 080083811625 | PD1N4D39 |

Note: DLC Premium items are noted in bold.

AXC Back Box Accessory

| Catalog Number | Description | Finish | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC |
|----------------|----------------------------|---------------|----------------|-----|---------|--------|-------|--------------|
| BB/AXC | Back Box | Carbon Bronze | N/A | N/A | N/A | N/A | N/A | 080083160709 |
| BB/AXC-PC | Back Box with Photocontrol | Carbon Bronze | N/A | N/A | N/A | N/A | N/A | 080083160723 |

Features

Lumen Select pack allows installer to reduce the light output to 75 or 50%

Integrated photocontrol provides maximum energy savings while leveraging

Four 1/2" NPT conduit entry points for surface mounted conduit

Single die-cast aluminum back box to simultaneously accommodate Axcet Small and Large housings



LUMARK WALL MOUNT

XTOR Crosstour Luminaire
WALL MOUNT

- Architectural style with super bright, energy-efficient LEDs
- Low-profile, rugged die-cast aluminum construction and stainless steel hardware
- Universal back box with sealed and gasketed optical compartment
- Wall, surface, post, bollard, low-level, inverted, floodlight mounting
- Ideal for multi-use facilities, pathway illumination and building entrances



| Catalog Number | Description | Finish | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|----------------|-----------------------|---------------|----------------|-------|----------|--------|-------|--------------|-----------------|
| XTOR1B | Small Full Cutoff | Carbon Bronze | 70W HID | 5000K | 120-277V | 1,418 | 12 | 080083777969 | PRVAZAZR |
| XTOR2B | Small Full Cutoff | Carbon Bronze | 100W HID | 5000K | 120-277V | 2,135 | 18 | 080083778225 | PGP4FYV3 |
| XTOR3B | Small Full Cutoff | Carbon Bronze | 150W HID | 5000K | 120-277V | 2,751 | 26 | 080083778041 | PWFZHYJH |
| XTOR4B | Medium Full Cutoff | Carbon Bronze | 250W HID | 5000K | 120-277V | 4,269 | 38 | 080083778003 | PUJ1NXGY |
| XTOR6B | Large Full Cutoff | Carbon Bronze | 320W HID | 5000K | 120-277V | 6,129 | 58 | 080083774807 | PWEKQNMV |
| XTOR6BRL | Large Refractive Lens | Carbon Bronze | 320W HID | 5000K | 120-277V | 6,225 | 58 | 080083774821 | PH59ANRG |
| XTOR8B | Large Full Cutoff | Carbon Bronze | 400W HID | 5000K | 120-277V | 8,502 | 81 | 080083774814 | P5557CRH |
| XTOR8BRL | Large Refractive Lens | Carbon Bronze | 400W HID | 5000K | 120-277V | 8,635 | 81 | 080083774852 | P2F72ZQT |
| XTOR6B-PC1 | Large Full Cutoff | Carbon Bronze | 320W HID | 5000K | 120-277V | 6,129 | 58 | 080083774845 | PWEKQNMV |
| XTOR8B-PC1 | Large Full Cutoff | Carbon Bronze | 400W HID | 5000K | 120-277V | 8,502 | 81 | 080083774869 | P5557CRH |

Note: DLC Premium items are noted in bold.

WPM Wall Pack Luminaire
WALL MOUNT

- LED wall pack available with fixed output or selectable configurations
- Die-cast aluminum housing with hinged, removable die-cast aluminum door
- Heat and impact resistant borosilicate glass lens
- Energy and maintenance savings up to 89%
- Ideal for pathway illumination, building entrances, vehicle ramps, schools, tunnels, stairways and loading docks



| Catalog Number | Description | Finish | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|--|----------------------|--------|----------------|-------------------------|----------|--------------|--------|--------------|----------------|
| WPMLED07B | Medium LED Wall Pack | Bronze | 70W HID | 4000K | 120-277V | 3,518 | 28 | 080083175901 | PLG3JV3NOPXG |
| WPMLED10B | Medium LED Wall Pack | Bronze | 100W HID | 4000K | 120-277V | 4,869 | 38 | 080083175925 | PL15XLAGUKIK |
| WPMLED15B | Medium LED Wall Pack | Bronze | 150W HID | 4000K | 120-277V | 7,456 | 54 | 080083175949 | PL0VMMW6N325 |
| WPMLED20B | Medium LED Wall Pack | Bronze | 200W HID | 4000K | 120-277V | 10,399 | 81 | 080083175963 | PLECHK61X4GS |
| WPMLED25B | Medium LED Wall Pack | Bronze | 250W HID | 4000K | 120-277V | 12,873 | 102 | 080083175987 | PLI25AISGW2W |
| CCT Selectable, Lumen Selectable & Switchable Photocontrol | | | | | | | | | |
| WPMLED15S | Medium LED Wall Pack | Bronze | 150W HID | 3000K 4000K 5000K | 120-347V | 3,977-7,535 | 29-59 | 080083176144 | PLAP4BWH9V52 |
| WPMLED25S | Medium LED Wall Pack | Bronze | 250W HID | 3000K 4000K 5000K | 120-347V | 9,779-12,829 | 72-101 | 080083176168 | PLCDOB65Z8EN |

LUMARK CEILING MOUNT/FLOODLIGHT

CLCS Canopy Luminaire
CEILING MOUNT

- LED canopy available with fixed output or selectable configurations
- 3-color selectable CCT: 3000K, 4000K, 5000K
- High-performance, energy-efficient illumination
- Energy and maintenance savings up to 86% versus HID solutions
- Ideal for new or existing spaces including bank, retail, drive-thru, covered sidewalks and hospital entryways



| Catalog Number | Description | Finish | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|-----------------------------------|------------------|--------|----------------|-------------|----------|---------------|--------|--------------|--------------------|
| CLCS15 | Small LED Canopy | Bronze | 150W HID | 4000K | 120-277V | 5,671 | 39 | 080083161003 | PIXLM44Z, PAVO9EAO |
| CLCS17 | Small LED Canopy | Bronze | 175W HID | 4000K | 120-277V | 7,956 | 56 | 080083161041 | P3KXJQWI, PUARYGUZ |
| CCT Selectable & Lumen Selectable | | | | | | | | | |
| CLCS17S | Small LED Canopy | Bronze | 175W HID | 3000K-5000K | 120-277V | 5,323-7,939 | 39-56 | 080083160006 | P5MUAJIV, P5S4B75K |
| CLCS17S-PC | Small LED Canopy | Bronze | 175W HID | 3000K-5000K | 120-277V | 5,323-7,939 | 39-56 | 080083159727 | P5MUAJIV, P5S4B75K |
| CLCS40S | Large LED Canopy | Bronze | 400W HID | 3000K-5000K | 120-277V | 12,614-17,427 | 91-123 | 080083160020 | PUT80LSK, PPEWK64B |

NFFLD Night Falcon Luminaire
FLOODLIGHT

- Cost-effective LED floodlight available in medium or large sizes
- Precision engineered and high-efficiency optics delivers superior uniformity
- Compact, robust die-cast aluminum housing, driver compartment and door
- 6H x 6V NEMA wide distribution
- Ideal for area lighting for security, building facade and signage



| Catalog Number | Description | Finish | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|---------------------|--------------------|---------------|----------------|-------|----------|--------|-------|--------------|---|
| NFFLD-S-C15-T-UNV | Small, Trunnion | Carbon Bronze | 150W HID | 4000K | 120-277V | 5,797 | 51 | 080083760275 | P07DFEUO |
| NFFLD-S-C15-KNC-UNV | Small, Knuckle | Carbon Bronze | 150W HID | 4000K | 120-277V | 5,797 | 51 | 080083760268 | P07DFEUO |
| NFFLD-C25-S | Medium, Slipfitter | Carbon Bronze | 250W HID | 4000K | 120-277V | 10,530 | 85 | 080083801244 | PFT7DB3V, PY7YCS7P, P688KBF9 |
| NFFLD-C25-T | Medium, Trunnion | Carbon Bronze | 250W HID | 4000K | 120-277V | 10,530 | 85 | 080083801220 | P1KJC5UE, PX8F6VUW, P5VPYGW5 |
| NFFLD-C40-S | Medium, Slipfitter | Carbon Bronze | 400W HID | 4000K | 120-277V | 16,932 | 128 | 080083801206 | P6WY96JR, PSCSJCSY, P9J2MXXC |
| NFFLD-C40-T | Medium, Trunnion | Carbon Bronze | 400W HID | 4000K | 120-277V | 16,932 | 128 | 080083801183 | P1FRZ85N, P5KZZS6U, P2UR5RKV |
| NFFLD-L-C100-S | Large, Slipfitter | Carbon Bronze | 1,000W HID | 4000K | 120-277V | 33,941 | 252 | 080083800889 | PXL241RW, PWCEG57, P15GC6CP |
| NFFLD-L-C100-T | Large, Trunnion | Carbon Bronze | 1,000W HID | 4000K | 120-277V | 33,941 | 252 | 080083800902 | PWOBVSIR, PVK3AY96, PYOWZCFO |

Note: DLC Premium items are noted in bold.

CTKR Caretaker Luminaire
AREA/SITE

- Rugged die-cast housing for durability in security applications
- Uniform distribution with excellent vertical illumination for maximum light coverage
- Wall/pole-mount bracket and integral slipfitter for versatility in mounting
- Versatile universal mounting plate allows quick and easy installation
- Low-cost, low-maintenance solution for residential street lighting, perimeter area lighting, parking areas, loading platforms, boat docks, access drives or pathways



| Catalog Number | Description | Finish | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|----------------|----------------------------------|--------|----------------|-------|----------|--------|-------|--------------|---------------------------|
| CTKRV1B | Area site with PC, UNV Mount Arm | Raw | 150W HID | 4000K | 120-277V | 4,515 | 29 | 080083865390 | P9G7NN3C |
| CTKRV2B | Area site with PC, UNV Mount Arm | Raw | 175W HID | 4000K | 120-277V | 7,110 | 50 | 080083865406 | PRSAJP8E, PKGOJV49 |
| CTKRV3B | Area site with PC, UNV Mount Arm | Raw | 250W HID | 4000K | 120-277V | 9,741 | 71 | 080083865413 | P9E35CQB, P3P0FHML |
| SR-CARETAKER | Small Acrylic Refractor | Clear | N/A | N/A | N/A | N/A | N/A | 080083699087 | N/A |

Note: DLC Premium items are noted in bold.

PRV Prevail Luminaire
AREA/SITE

- Provides a new level of performance, versatility and value
- Low-profile, architectural design with a die-cast aluminum housing
- Versatile mount arm includes multiple drill patterns, round and square poles
- Simple retrofit installation; Reduces installation time and provides labor savings
- Ideal for general area lighting such as parking lots, walkways, roadways and building areas



| Catalog Number | Description | Finish | Replaces Up To | CCT | Voltage | Lumens | Watts | UPC | DLC Product ID |
|-----------------|--------------------------|--------|----------------|-------|----------|--------|-------|--------------|-----------------|
| PRVS-C25-UNV-T3 | T3 Distr., STD Arm Mount | Bronze | 250W HID | 4000K | 120-277V | 13,183 | 96 | 080083897308 | PVJAMD08 |
| PRVS-C25-UNV-T4 | T4 Distr., STD Arm Mount | Bronze | 250W HID | 4000K | 120-277V | 13,140 | 96 | 080083897322 | PC50ML3L |
| PRVS-C40-UNV-T3 | T3 Distr., STD Arm Mount | Bronze | 400W HID | 4000K | 120-277V | 17,144 | 131 | 080083897346 | PFLCEN3P |
| PRVS-C40-UNV-T4 | T4 Distr., STD Arm Mount | Bronze | 400W HID | 4000K | 120-277V | 17,087 | 131 | 080083897360 | P0B3IQ7D |
| PRVS-C60-UNV-T3 | T3 Distr., STD Arm Mount | Bronze | 450W HID | 4000K | 120-277V | 20,050 | 153 | 080083897384 | PG5CZXKH |
| PRVS-C60-UNV-T4 | T4 Distr., STD Arm Mount | Bronze | 450W HID | 4000K | 120-277V | 19,984 | 153 | 080083897421 | PM3XNS4Q |

Note: DLC Premium items are noted in bold.

LAS Luminaire
AREA/SITE

- Automatic dusk-to-dawn area lighting with included twistlock photocontrol
- 10-position, field-selectable lumens across 2 die-cast aluminum housing sizes
- Energy and maintenance savings up to 79% versus HID solutions up to 79%
- Versatile, adjustable slipfitter arm mounts horizontally or vertically for simple installation
- Ideal parking lots, walkways, building areas and other outdoor areas




| Catalog Number | Description | Finish | Replaces Up To | CCT | Voltage | Selectable Lumens | Watts | UPC | DLC Product ID |
|----------------|--------------------------------------|--------|----------------|-------|----------|-------------------|--------|--------------|-----------------|
| LAS45S-T3 | T3 Distr., Adjustable Slipfitter Arm | Bronze | 450W HID | 4000K | 120-277V | 4,900 - 20,000 | 30–153 | 080083155804 | P1T4HG08 |
| LAS45S-T4 | T4 Distr., Adjustable Slipfitter Arm | Bronze | 450W HID | 4000K | 120-277V | 4,900 - 20,000 | 30–153 | 080083155828 | PJZTZ423 |
| LAS45S-T5 | T5 Distr., Adjustable Slipfitter Arm | Bronze | 450W HID | 4000K | 120-277V | 4,900 - 20,000 | 30–153 | 080083155842 | PW39PQB3 |
| LAS100S-T3 | T3 Distr., Adjustable Slipfitter Arm | Bronze | 1,000W HID | 4000K | 120-277V | 8,200 - 34,000 | 48-251 | 080083155866 | PP8AW4F5 |
| LAS100S-T4 | T4 Distr., Adjustable Slipfitter Arm | Bronze | 1,000W HID | 4000K | 120-277V | 8,200 - 34,000 | 48-251 | 080083155880 | P0CHU9AS |
| LAS100S-T5 | T5 Distr., Adjustable Slipfitter Arm | Bronze | 1,000W HID | 4000K | 120-277V | 8,200 - 34,000 | 48-251 | 080083155903 | PMUFIF4F |

Note: DLC Premium items are noted in bold.



Maximize Savings with Utility Rebates

Cooper Lighting Solutions Exclusive Utility Rebate Incentive Finder

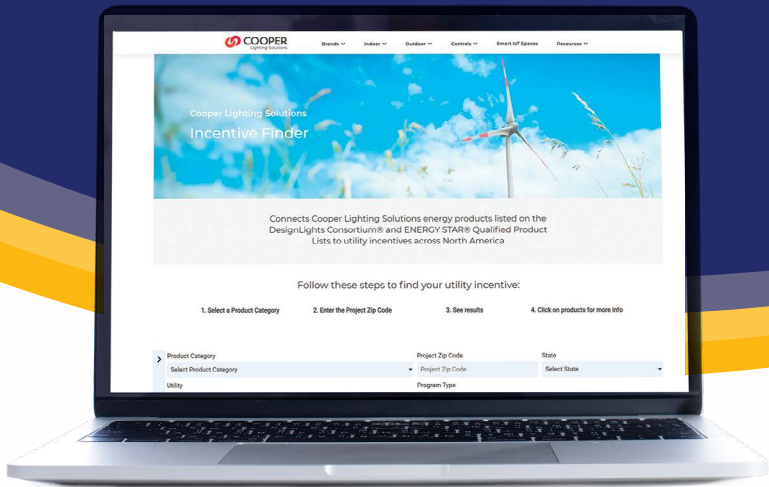

cooperlighting.com/marketpro

By using our online Incentive Finder, you can search by state and zip code to find local rebates that save money and add value for your customers. For your convenience, we've identified and included the ENERGY STAR® and DLC® product ID numbers within the MarketPro catalog.

Cooper Lighting Solutions has the largest portfolio of **ENERGY STAR**®-certified recessed downlights and **DesignLights**® Consortium (DLC) - qualified commercial luminaires, meeting high-quality, energy-efficient standards.

Code Compliance

The largest verified list of high performing LED lighting products.

<http://www.designlights.org/search/>
DLC Premium items are denoted in bold



| UPC | DLC Product ID |
|--------------|-----------------|
| 080083811588 | PG4TJNY3 |

<http://www.energystar.gov/productfinder/>



| UPC | ENERGY STAR Unique ID |
|--------------|-----------------------|
| 080083848164 | 2322242 |

www.energy.ca.gov




Look for the DLC, ENERGY STAR and T20 icons that identifies qualified products.

Resource Center

One-stop shop for all your resource needs.

Cooperlighting.com > Resources

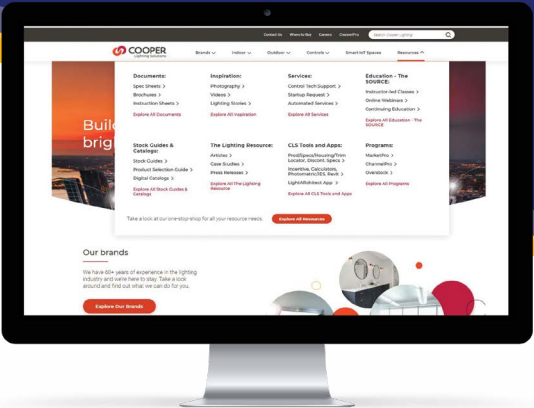

LITERATURE, PRODUCT PHOTOGRAPHY, VIDEOS, CASE STUDIES, LOGOS & MORE!

Visit Cooperlighting.com and click on the Resources tab. The Resource Center is a central location of supportive product selection tools, inspirational images and downloadable digital resources.



Product Resources

- Brochures & Guides
- Spec sheets
- Installation sheets and guides

Inspiration

- Application Photography
- Product Photography & Videos
- Case studies
- Logos

Tools

- Energy Incentive Finder
- Photometric IES
- Revit Models
- Calculators & Audit Tools

Programs

- MarketPro
- Rapid Response
- Quick Ship

Education

- Instructor-led Classes
- Free online courses
- Continuing education

LOOKING FOR MORE EXPANDED SELECTIONS?

Browse Our Stock Product Catalog

Cooper Lighting's stock guide is your solution to have the latest and most popular in-stock lighting and controls products ready to ship.

[Cooperlighting.com > Resources](https://cooperlighting.com/resources)

Our stock catalog includes products from
HALO, Metalux, Greengate, Sure-Lites, Lumark



RAPID RESPONSE & QUICK SHIP PROGRAMS

[Cooperlighting.com > Solutions](https://cooperlighting.com/solutions)

Rapid Response

Rapid Response offers the most popular stocked Metalux ambient products, with customizable options delivered to you when you need them.

- ▶ Customizable Metalux commercial, industrial and specification products
- ▶ Options include: sensors, battery packs, flex, modular wiring, Chicago rated products



Quick Ship is your solution for fast-moving construction projects that require customizable architectural lighting products.

- ▶ Customizable Corelite, Neo-Ray and Shaper products
- ▶ Options include: sensors and battery packs



SOURCE Lighting Education Center

The benchmark for lighting educational facilities and programs for 30 years.

Expand Your Knowledge!

The SOURCE is an excellent resource for training and professional development. As the industry's leading lighting educational facility, the SOURCE offers numerous online and instructor-led courses and workshops for those wanting to expand their lighting and controls knowledge.

cooperlighting.com/source

- ▶ Instructor-led Classes
- ▶ Free Online Courses
- ▶ Continuing Education
- ▶ reSource Articles



LEARN. GROW. VISUALIZE.

Explore our one-stop-shop for Cooper Lighting Solutions digital tools.

Youtube.com > Cooper Lighting Solutions > Videos


► Explore Our Video Library!

Visit Cooper Lighting Solutions' YouTube page to explore our ever-expanding product video library! Everything you need to know about our innovative product offering can be found here. Get the facts on newly introduced solutions, discover product benefits and watch videos on how to install them. Explore our curated playlists to easily find informative videos by industry-leading brand, market and product category.



DREAM. EXPERIMENT. PLAN.


A more powerful way to design.

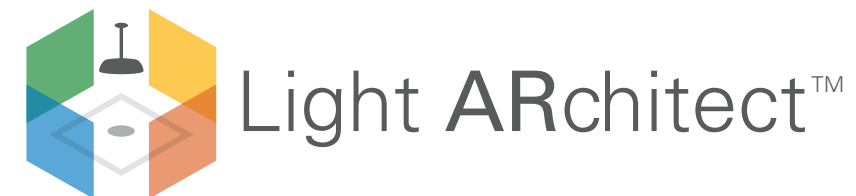

► See your space in a new light with augmented reality

We've taken the guesswork out of lighting design with Light ARchitect, an augmented reality mobile app that lets you instantly visualize light fixtures in your space.

- Browse state-of-the-art light LED fixtures and choose the ones you want to see in your space
- Adjust the fixture's finish, lumen output, mounting height, color temperature and more
- Virtually turn lights on to get the full effect
- Take screenshots to share and email to clients or colleagues

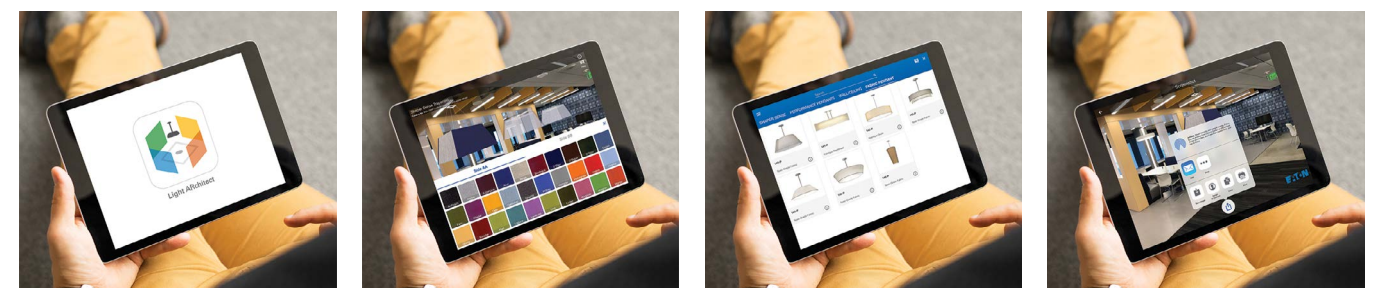

cooperlighting.com/lightarchitect

Light ARchitect is free and available for iOS and Android devices

Download **Light ARchitect**



2022 LIGHTING & CONTROLS

STOCK PRODUCT GUIDE

Lighting Product Lines

Ametrix
AtLite
Corelite
Ephesus
Fail-Safe
Halo
Halo Commercial
Invue
io
Iris
Lumark
Lumière
McGraw-Edison
Metalux
MWS
Neo-Ray
Portfolio
RSA
Shaper
Streetworks
Sure-Lites

Controls Product Lines

Fifth Light Technology
Greengate
iLight (International Only)
iLumin
Zero 88

Connected Lighting Systems

Distributed Low-Voltage Power
HALO Home
iLumin Plus
LumaWatt Pro
WaveLinx
Trellix



Cooper Lighting Solutions
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.cooperlighting.com

Canada Sales
5925 McLaughlin Road
Mississauga, Ontario L5R 1B8
P: 905-501-3000
F: 905-501-3172

© 2022 Cooper Lighting Solutions
All Rights Reserved
Printed in USA
Publication No. CA525649EN
April 2022

Cooper Lighting Solutions is a registered trademark.

All other trademarks are property of their respective owners.

Product availability, specifications, and compliances are subject to change without notice.