

MOVE'O Lite



MOVE'O Lite detects the presence of people and measures the temperature, humidity and brightness of a room. This data is transmitted via a public or private LoRaWAN radio frequency network®.

→ The **MOVE'O Lite** sensor has 4 sensors: passive infrared (PIR), temperature T°C, humidity Hr%, and luminosity for indoor use.

APPLICATIONS

- Monitoring the occupancy of a waiting room
- Occupancy rate of meeting rooms
- Heating control according to the occupancy of a zone
- Classification of the BMS in class A within the framework of the CEE scheme

BENEFITS & FEATURES

- LoRaWAN®, Class A.
- Easy to install and use.
- 5 years of autonomy.
- 4 sensors : Presence, Temperature, Humidity, Brightness

Measuring ranges / accuracies :

- ✓ **Movement:** up to 12m, 102° x 92° detection, 68 zones.
- ✓ **Temperature:** 0°C to +55°C / ± 0.2°C
- ✓ **Hygrometry:** 0% to 100%rH / ± 2%.
- ✓ **Brightness:** 0.01Lux to 83,000Lux / 5%.

CERTIFICATION

- RoHS, RED



In the standard report, the information transmitted corresponds to the status of the current presence detection.

A delay time (seconds) is used to specify after how long without movement the sensor will decide that the room is unoccupied.

In batch reporting, the periodically transmitted information contains the states of the presence detection and the time stamp of the records.

Installation and commissioning is quick and easy.

The sensor is equipped with :

- a magnetic switch allowing association to the network and various interventions (e.g. prolonged standby),
- LEDs to monitor the association on the network and to know the main status of the sensor.

Powered by one 3.6V/2600mAh battery, the sensor has an autonomy of at least 5 years with 1 transmission every 30 minutes in batch mode.

Thanks to its infrared technology (PIR), **MOVE'O Lite** detects presence through movement. Presence detection is achieved by the changes in infrared radiation that occur when a person moves with a different temperature than the environment.

In addition, **Move'O Lite** measures the temperature, humidity and luminosity of a space, ensuring the comfort of the building's occupants.

Move'O Lite responds to questions of energy efficiency. Indeed, this sensor makes it possible to know the activity in a zone, and thus to be able to regulate the heating according to the frequentation of this room.

The measurement data is transmitted individually (standard report) or aggregated and compressed (batch report) before being transmitted over the LoRaWAN network.




WE HAVE THE RIGHT SENSORS FOR YOUR NEEDS

WATTECO is a leading European designer and manufacturer of intelligent radio frequency sensors and actuators as well as multi-protocol remote data collection solutions. WATTECO is a member of the LoRa Alliance®.



MOVE'O Lite

TECHNICAL CHARACTERISTICS

RADIOFREQUENCY				
Frequency	EU: 863-870 MHz			
Emitted power	+14 dBm			
Sensitivity	-140 dBm			
FIRMWARE				
Protocol	LoRaWAN™ , Class A			
Measurement periodicity	10mn to 24h			
Transmission interval	30mn to 48h			
Data compression	Yes by default; can be disabled.			
Activation method	Activation by Personalization (ABP) or Over-The-Air Activation (OTAA)			
Data encryption	AES128			
MEASURES	Movement	Temperature	Hygrometry	Brightness
Range	Detecting distance: 12m, 6m, 3m	+0°C to +55°C	0% to 100% HR	0.01 to 83,000 Lux
Accuracy	105° horizontal, 92° vertical	± 0.2°C between [12°C to +25°C] otherwise ± 0.5°C	± 2% between [+12°C to +25°C].	5%
Resolution	-	0,1°C	1%	-
POWER SUPPLY				
Voltage	3.6 V / 2600 mAh lithium battery (can be replaced after removing the cover) Battery voltage level measured and transmitted regularly (configurable interval)			
Autonomy in SF12 (in the range of +12°C to +25°C)	5 years with 1 report every 30 minutes			
USER INTERFACE				
Magnetic switch + LEDS	Association on the network, sensor status.			
ALARMS				
Detection	On detection of movement, temperature and humidity thresholds			
Alerts	On battery level below 2.7 Volts;			
BOX				
Size / Weight	74x74x35mm / 69 g			
ENVIRONMENT				
Operation	+0°C / +55°C ; +0%rH / +95%rH (non-condensing)			
Storage	+10°C / +30°C; +0%rH / +60%rH			
STANDARDS & REGULATIONS				
RED 2014/53/EU,			  	
PRODUCT NUMBER				
REFERENCE		DESCRIPTION		
50-70-225		LoRaWAN™ MOVE'O LITE		


MOVEMENT TECHNICAL CHARACTERISTICS




The infrared technology (PIR) in the Move'O detects presence with 3 different zone:

- 1st zone: 12m with a radius of 112° horizontally and 13,2° vertically
- 2nd zone: 6m with a radius of 112° horizontally and 32,5° vertically
- 3rd zone: 3m with a radius of 112° horizontally and 9,8° vertically

Below the detection zone, when the device is placed at 1,7m above the floor:

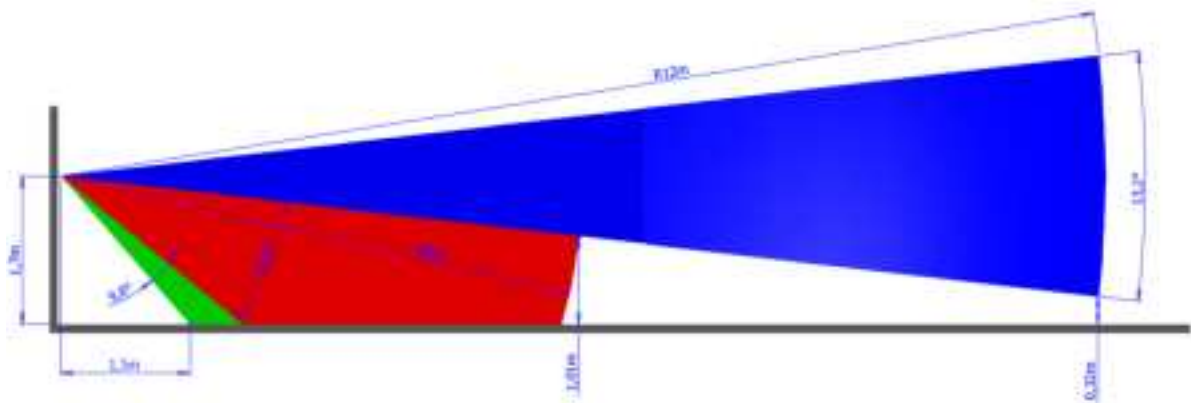

Side view

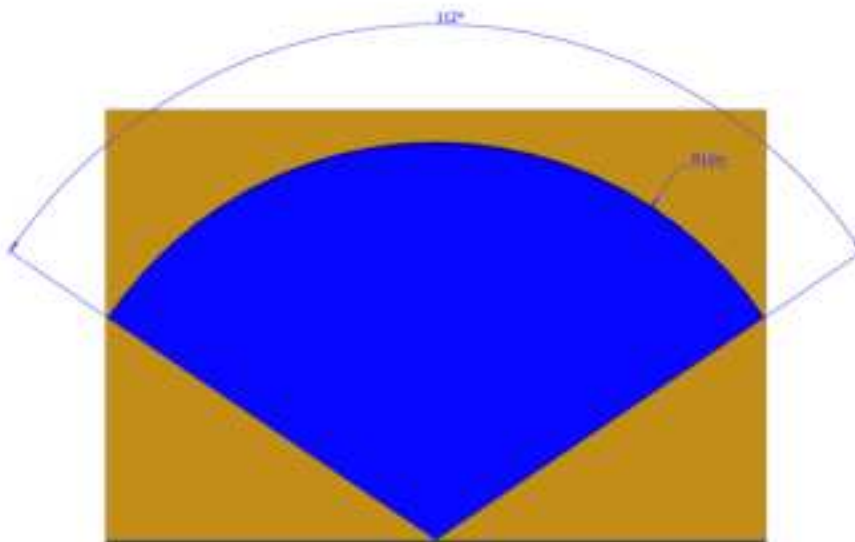

Top view