



## LED WALL SCONCE

► **DESIGN** - LED WALL SCONCE has a modern, multipurpose design and a stylish look with efficient lighting. Durable housing resistant to rust and impact provides many years of service. The acrylic lens with a 120° beam angle grants you even light distribution. It is designed to operate on 120V circuits.

► **COLOR SELECTABLE** - You can choose either a 3,000K warm white, 4,000K cool white or 5,000K daylight color temperature.

► **DIMMING** - Smooth triac dimming capabilities ranging from 10% to 100% with modern LED dimmers allow you to control the look and feel of your space.

► **APPLICATION** - The LED WALL SCONCE provides bright, yet smooth lighting for your family room, bedroom, hallway, corridor, or any other common area in your living space. This fixture is also Damp Locations rated.

► **ADVANTAGES** - With a lifespan of 50,000 hours, these fixtures are made to last decades under normal operation! ASD provides a 5-year limited warranty along with ETL and Energy Star certifications to guarantee top quality products and safety!

|                |  |
|----------------|--|
| Catalog number |  |
| Notes          |  |
| Type           |  |



Finish: Nickel Bronze Black

| Model                     | Size    | Watts | Voltage | Dimmable | Lumens               | CCT                        | Finish            | Dimensions (LxWxH)      |
|---------------------------|---------|-------|---------|----------|----------------------|----------------------------|-------------------|-------------------------|
| ASD-LWS-11-D15CC-NK       | 10 inch | 15W   | 120 V   | TRIAC    | 1,050/1,107/1,080 lm | 3CCT (3,000/4,000/5,000 K) | Nickel            | 7" x 3-5/16" x 9-13/16" |
| ASD-LWS-11-D15CC-NK-2PACK | 10 inch | 15W   | 120 V   | TRIAC    | 1,050/1,107/1,080 lm | 3CCT (3,000/4,000/5,000 K) | Nickel            | 7" x 3-5/16" x 9-13/16" |
| ASD-LWS-11-D15CC-BZ       | 10 inch | 15W   | 120 V   | TRIAC    | 1,050/1,107/1,080 lm | 3CCT (3,000/4,000/5,000 K) | Oil rubbed bronze | 7" x 3-5/16" x 9-13/16" |
| ASD-LWS-11-D15CC-BK       | 10 inch | 15W   | 120 V   | TRIAC    | 1,050/1,107/1,080 lm | 3CCT (3,000/4,000/5,000 K) | Black             | 7" x 3-5/16" x 9-13/16" |

## ORDERING INFORMATION

| Model                     | UPC          | Pcs. per carton | Carton size          | Carton weight | GTIN 14        |
|---------------------------|--------------|-----------------|----------------------|---------------|----------------|
| ASD-LWS-11-D15CC-NK       | 810050732260 | 4               | 18.9" x 10" x 12.4"  | 11.3 lbs      | 30810050732261 |
| ASD-LWS-11-D15CC-NK-2PACK | 810128113687 | 2               | 18.9" x 9.7" x 12.4" | 11.3 lbs      | 10810128113684 |
| ASD-LWS-11-D15CC-BZ       | 810050732277 | 4               | 18.9" x 10" x 12.4"  | 11.3 lbs      | 30810050732278 |
| ASD-LWS-11-D15CC-BK       | 810128112512 | 4               | 18.9" x 10" x 12.4"  | 11.3 lbs      | 10810128112519 |

For most up-to-date spec sheets please refer to [asd-lighting.com](http://asd-lighting.com)

**ASD LIGHTING CORP**

E-mail: [orders@asd-lighting.com](mailto:orders@asd-lighting.com) | Web site: [www.asd-lighting.com](http://www.asd-lighting.com)






# LED WALL SCONCE

## PRODUCT SPECIFICATIONS:

| Construction & Materials             |                                                       |                                 |         |
|--------------------------------------|-------------------------------------------------------|---------------------------------|---------|
| Housing                              | Steel                                                 |                                 |         |
| Lens                                 | Acrylic                                               |                                 |         |
| Finish                               | Nickel, Oil rubbed bronze, Black                      |                                 |         |
| Weight                               | 2.2 lbs (1 kg)                                        | for 2PACK model: 4.4 lbs (2 kg) |         |
| Environmental system                 |                                                       |                                 |         |
| Work environment                     | Suitable for Damp Locations                           |                                 |         |
| Operating temperature                | -4°F to 113°F (-20°C to 45°C)                         |                                 |         |
| L-70 Life                            | > 50,000 hrs                                          |                                 |         |
| Optical system                       |                                                       |                                 |         |
| Luminous flux                        | 1,050/1,107/1,080 lm                                  |                                 |         |
| Color temperature                    | 3CCT switch (3,000/4,000/5,000 K), 3,000 K by default |                                 |         |
| CRI                                  | > 80                                                  |                                 |         |
| Electrical system                    |                                                       |                                 |         |
| Input voltage                        | 120 V                                                 |                                 |         |
| Max input current                    | 0.19 A                                                |                                 |         |
| Inrush current (Action time)         | 0.12 A ( 0.1 S)                                       |                                 |         |
| Off state power                      | 0W                                                    |                                 |         |
| Power consumption                    | 15W                                                   |                                 |         |
| Power factor                         | > 0.9                                                 |                                 |         |
| Surge protection DM/CM               | 1.25 kV / 1.25 kV                                     |                                 |         |
| Dimming range                        |                                                       |                                 |         |
| 10-100%                              |                                                       |                                 |         |
| Dimming compatible controls          |                                                       |                                 |         |
| Brand                                | Lutron                                                |                                 | Leviton |
| Models                               | TGCL-153P                                             | MACL-153MLH                     | DSL06   |
|                                      | CTCL-153P                                             | DVCL-153PR                      | RNL06   |
|                                      | P-PKG1W                                               | STCL-153PH                      |         |
|                                      | PD-6WCL                                               |                                 |         |
| Regular and voluntary certifications |                                                       |                                 |         |
| 5-year limited warranty              |                                                       |                                 |         |
| Energy Star listed                   |                                                       |                                 |         |
| cETLus certified 4001256             |                                                       |                                 |         |

## PACKAGE CONTENTS:

| Description     | Q-ty |
|-----------------|------|
| LED Wall Sconce | 1    |
| Crossbar (A)    | 1    |
| Wire nut (B)    | 3    |
| Screw (C)       | 4    |
| Box             | 1    |



## INSTALLATION GUIDE

### IMPORTANT SAFETY INFORMATION:

Please read all the instructions below before installation.

- Make sure that the supply voltage corresponds to the rated product voltage.
- The product must be installed by a qualified electrician in accordance with the National Electrical Code and corresponding local codes.
- If the product is damaged, do not use it.

### ⚠ WARNING

**RISK OF PERSONAL INJURY – READ and follow all WARNINGS and installation instructions.** Keep or give to the owner for future reference.


**Risk of cuts:** Wear gloves to prevent cuts or abrasions when removing from carton, handling, installing, and maintaining this product.

**Risk of electric shock:** This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

**Risk of Fire:** Minimum 194°F supply conductors. Consult a qualified electrician to ensure correct branch circuit conductor.


ASD® assumes no responsibility for claims arising out of improper or careless installation or handling of this product.

### ELECTRICAL SCHEMATIC DIAGRAM:



### INSTALLATION STEPS:

- Slide the acrylic lens up and remove it. Attach the Crossbar to the Outlet Box with two mounting screws. Thread the other two screws into the appropriate holes of the Crossbar.
- Connect the wires: Black to Black, White to White, Ground to Ground. Secure the connection with wire nuts. Carefully tuck all the wires into the Outlet box.
- Put the fixture back plate to mounting surface allowing mounting screws to protrude through keyhole slots and tighten it securely. Choose preferred color temperature by adjusting the switch. Fix the acrylic lens by sliding it down.

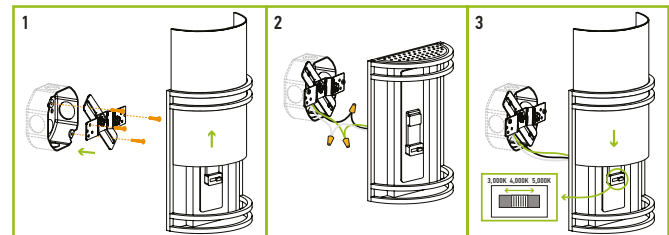

For most up-to-date spec sheets please refer to [asd-lighting.com](http://asd-lighting.com)