


ViewSonic® VIEWBOARD

ViewBoard 7562


Key Features

- Superb 4K UHD display panel with UFT+ technology, and 20-points multi-touch
- One-stop premium conference solution with compatible ViewSonic conference speakerphone and camera
- Comprehensive I/O ports, vCastSender, and myViewBoard display
- Built-in USB Type-C for simultaneous 65W fast charge and visual display
- Centralized IT management and content display by myViewBoard Manager

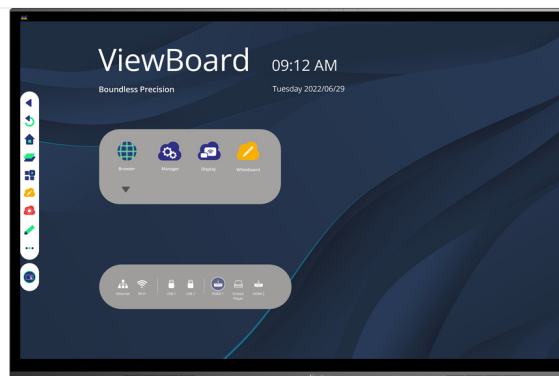

Product Description

ViewSonic ViewBoard 62 is an unparalleled large-format interactive display that propels collaborators to achieve effective and robust results. The bezel-less 4K UHD display panel is a gateway to a visual quality and immersive meeting space. Indulge in the maximized precision of true-to-life handwriting strokes thanks to the UFT+ Technology, 20-points multi-touch with multi-grade pen press. Compatible with ViewSonic conference speakerphone (VB-AUD-201) and all-in-one video conference camera (VB-CAM-201) systems, The ViewBoard 62 boasts pristine audio and a pixel-perfect image making it a powerful one-stop meeting station. Furthermore, it allows multiple connections, including comprehensive I/O ports, vCastSender, and myViewBoard Display, as well as built-in USB type supporting 65W fast charge and top-notch display at the same time. As an undoubted enhancement, the built-in myViewBoard Manager is an intuitive and effortless tool for IT and MIS systems that centralized IT control and multi-media presentation.

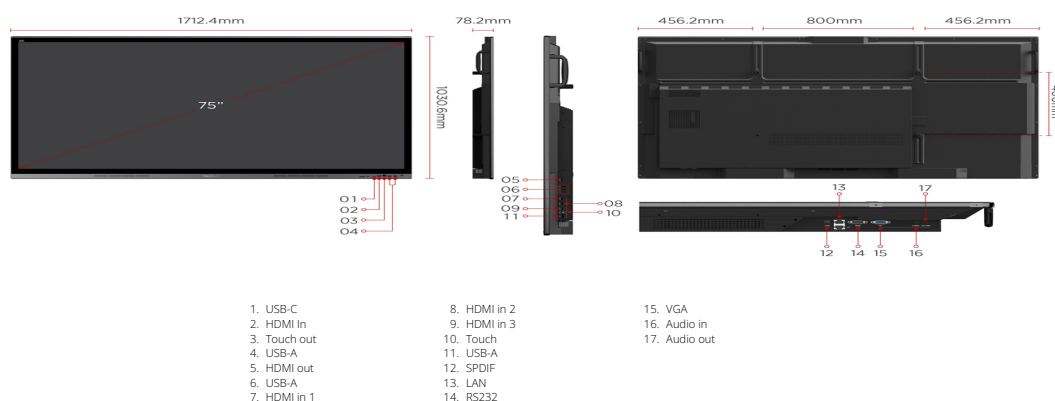

Visit Us www.viewsonic.com

DISPLAY	
Panel Size:	75"
Panel Type:	TFT LCD Module with DLED Backlight
Display Area (mm):	1650.24(H) x 928.26(V)
Aspect Ratio:	16:9
Resolution:	UHD 3840x2160(Pixels)
Colors:	1.07B colors (10bit)
Brightness:	350 nits (typ.), 300 nits (min)
Contrast Ratio:	1200:1 Typ., 5000:1 Max.(DCR enabled)
Response Time:	8.5ms
Viewing Angles:	H = 178, V = 178 typ.
Surface Treatment:	Hardness: 9H pencil
Bezel:	Top: 38.7 mm Bottom: 63.6 mm Left: 31.1 mm Right:31.1 mm
PLATFORM	
Processor:	Dual core A73+Dual core A53
RAM:	3GB DDR4
Storage:	32GB eMMC
TOUCH	
Type/ Tech:	Ultra Fine Touch Plus Technology (Projected Capacitive)
Touch Resolution:	32767 x 32767
Touch Point:	20
INPUT	
HDMI:	2.0 x 4 (3840x2160 @60Hz, HDCP 2.2) (HDMI 1~3 support CEC)
RGB / VGA:	x1
Audio:	1x PC-Audio IN
MIC(Microphone):	Full band 6-element MEMS microphone array
RS232:	x1
OPS:	x1
WiFi:	x1
OUTPUT	
HDMI:	x1 (1080P@60Hz / 3840x2160@60Hz)
Audio:	x1
SPDIF:	x1
LAN	
RJ45:	x2
USB	
Type A:	2.0 x 1, 3.0 x 5
Type B:	x2 (for touch)
Type C:	x1 (DP1.4 ,USB 3.2 ,PD 65W, Ethernet 100M)
SPEAKERS	
12W x 2 + 15W x 1 Subwoofer	

BUNDLE SOFTWARE	
Basic Annotation Software:	myViewBoard WhiteBoard for Android
Pro Annotation Software:	myViewBoard WhiteBoard for Windows (Embedded in Windows : PC)
Wireless Presentation:	ViewBoard Cast & myViewBoard Display
SPECIAL FEATURES	
Simple LAN sharing between IFP and slot-in device:	Yes
POWER	
Voltage:	100-240VAC +/- 10% Wide Range
Consumption:	On:130W(typ.) / Off: <0.5W
OPERATING CONDITIONS	
Temperature (° C):	0°C to 40°C
Humidity:	20% ~ 80% RH non-condensing
DIMENSIONS (W X H X D)	
Physical (inch / mm):	67.4 x 40.6 x 3.1 in / 1712 x 1031 x 78 mm
Packaging (inch / mm):	72.8 x 44.1 x 10.6 in / 1848 x 1121 x 270 mm
WEIGHT	
Net (lb / kg):	110.34 lb / 50.05 kg
Gross (lb / kg):	146.17 lb / 66.3 kg
REGULATIONS	
cTUVus, FCC/ICES003, Energy star 8.0, EPEAT, Mexico NOM, Mexico Energy, EMC/CE, CB/LVD, CB/R / EAC, UkrSEPRO, UKCA, LBL, Green BOM, RoHS, ErP, REACH, SCIP, WEEE, TPCH, CA65, PA	
PACKAGE CONTENTS	
1. Power cable 2. Remote control 3. AAA battery X2 4. USB cable Type C 5. Passive stylus x 2 6. Quick Start Guide 7. Compliance statement 8. RS232 adapter 9. Plate 10. Clamp x 5 11. Screw x 8 12. HDMI cable 13. Touch USB cable	
COMPATIBLE SLOT-IN PC	
VPC12-WPO, VPC2C-O, VPC25-O, VPC27-O series	

