

# BluSkye® Android Quick Start Guide for Celrado

For the most up-to-date app settings and configurations, check [www.cleverdevices.com/products/celrado/](http://www.cleverdevices.com/products/celrado/).




1. Ensure your **BluSkye®** Speaker Microphone (SM) is powered off. Press the power button for 6 seconds. The SM will beep twice at 3 seconds, and twice again at 6 seconds. The LED will begin to alternate between blue and red.



2. For devices equipped with NFC, navigate to **Settings > Connected Devices > Connection Preferences** and toggle **NFC** on. For devices without NFC, skip to step 4.



3. Slowly move your **BluSkye®** across the back of your device until a pairing dialog appears. Follow the prompts and select "Pair" to complete pairing. Skip step 4.

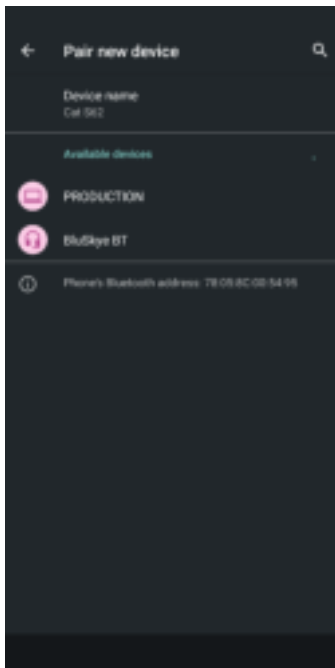

4. For devices without NFC, navigate to **Settings > Connected Devices > Pair New Device**. Select **BluSkye BT**.



5. Once paired the SM will beep twice and the LED will begin to blink blue.



6. Launch **Celrado** and tap the username bar 10 times. Select the **Settings** button that appears in the upper-right corner and save your login credentials.



7. The RSM will automatically connect to the app for PTT. Tap the **Speakerphone** button on the PTT screen to route audio to the RSM.

#### Recommended Settings:

- Set **Missed Heartbeat Threshold** to 3.
- Enable **Talkgroup Announcement** on **device sleep** and **device active**.

#### Instructional Videos:

[Pairing BluSkye](#)

#### ***Innovation... Quality... Passion***

Designed, Assembled, Tested and Supported with Pride in the USA, at Stone Mountain we strive to provide our customers with innovative products of the highest quality, reliability and value. We welcome and appreciate your input - Feel free to contact us.

Stone Mountain, Ltd.  
1597 Eagle Point Road  
Huddleston, VA 24104

23Apr25

Customer Support: 540.297.6434

[www.stonemountainltd.com](http://www.stonemountainltd.com)