

xEffect - Industrial Switchgear Range Residual Current Devices FRCmM














Catalog



Powering Business Worldwide

Residual Current Devices - General Data

Short description of the most important RCD types

Symbol	Description
	Eaton standard. Suitable for outdoor installation (distribution boxes for outdoor installation and building sites) up to -25° C.
	Conditionally surge-current proof (>250 A, 8/20 µs) for general application.
	Type AC: AC current sensitive RCCB
	Type A: AC and pulsating DC current sensitive RCCB, not affected by smooth DC fault currents up to 6 mA
	Type F: AC and pulsating DC current sensitive RCCB, trips also at frequency mixtures (10 Hz, 50 Hz, 1000 Hz), min. 10 ms time-delayed, min. 3 kA surge current proof, higher load capacity with smooth DC fault currents up to 10 mA
	Frequency range up to 20 kHz
	Trips also at frequency mixtures (10 Hz, 50 Hz, 1000 Hz)
	Type B: All-current sensitive RCD switchgear for applications where DC fault currents may occur. Non-selective, non-delayed. Protection against all kinds of fault currents.
	Type B+: All-current sensitive RCD switchgear for applications where DC fault currents may occur. Non-selective, non-delayed. Protection against all kinds of fault currents. Provides enhanced fire safety.
	RCD of type G (min 10 ms time delay) surge current-proof up to 3 kA. For system components where protection against unwanted tripping is needed to avoid personal injury and damage to property. Also for systems involving long lines with high capacitive reactance. Some versions are sensitive to pulsating DC. Some versions are available in all-current sensitive design.
	RCD of type S (selective, min 40 ms time delay) surge current-proof up to 5 kA. Mainly used as main switch, as well as in combination with surge arresters. This is the only RCD suitable for series connection with other types if the rated tripping current of the downstream RCD does not exceed one third of the rated tripping current of the device of type S. Some versions are sensitive to pulsating DC. Some versions are available in all-current sensitive design.
	„X-ray-proof“, for avoiding unwanted tripping caused by x-ray devices.
	„Frequency converter-proof“, for avoiding unwanted tripping caused by frequency converters, speed-controlled drives, etc.

Kind of residual current and correct use of RCD Types

Kind of current	Current profile	Correct use / application field of RCCB types						Tripping current
		AC	A	F	B	/ B+		
				 			 kHz	
Sinusoidal AC residual current		✓	✓	✓	✓			0.5 to 1.0 I _{Δn}
Pulsating DC residual current (positive or negative half-wave)		–	✓	✓	✓			0.35 to 1.4 I _{Δn}
Cut half-wave current		–	✓	✓	✓			Lead angle 90°: 0.25 to 1.4 I _{Δn} Lead angle 135°: 0.11 to 1.4 I _{Δn}
Lead angle 90° el Lead angle 135° el			✓	✓	✓			
Half-wave with smooth DC current of 6 mA		–	✓	✓	✓			max. 1.4 I _{Δn} + 6 mA
Half-wave with smooth DC current of 10 mA		–	–	✓	✓			max. 1.4 I _{Δn} + 10 mA
Smooth DC current		–	–	–	✓			0.5 to 2.0 I _{Δn}

Tripping time

Break time and non-actuating time for alternating residual currents (r.m.s. values) for type AC and A RCCB


Classification	$I_{\Delta n}$ mA		$I_{\Delta n}$	$2 \times I_{\Delta n}$	$5 \times I_{\Delta n}$	$5 \times I_{\Delta n}$ or 0.25A	500A
Standard RCD Conditionally surge current-proof 250 A	≤30	Max. tripping time (s)	0.3	0.15		0.04	0.04
Standard RCD Conditionally surge current-proof 250 A	>30	Max. tripping time (s)	0.3	0.15	0.04		0.04
RCCB Type G (Short-time-delay) Surge current-proof 3 kA	30	Min. non actuating time(s) Max. tripping time (s)	0.01 0.3	0.01 0.15		0.01 0.04	0.01 0.04
RCCB Type G (Short-time-delay) Surge current-proof 3 kA	>30	Min. non actuating time(s) Max. tripping time (s)	0.01 0.3	0.01 0.15	0.01 0.04		0.01 0.04
RCCB Type S (Selective) Surge current-proof 5 kA	>30	Min. non actuating time(s) Max. tripping time (s)	0.13 0.5	0.06 0.2	0.05 0.15		0.04 0.15

Break time for half-wave pulsating residual currents (r.m.s. values) for type A RCCB

Classification	$I_{\Delta n}$ mA		$1.4 \times I_{\Delta n}$	$2 \times I_{\Delta n}$	$2.8 \times I_{\Delta n}$	$4 \times I_{\Delta n}$	$7 \times I_{\Delta n}$	0.35 A	0.5 A	350A
Standard RCD Conditionally surge current-proof 250 A	<30	Max. tripping time (s)		0.3		0.15			0.04	0.04
Standard RCD Conditionally surge current-proof 250 A	30	Max. tripping time (s)	0.3		0.15			0.04		0.04
Standard RCD Conditionally surge current-proof 250 A	>30	Max. tripping time (s)	0.3		0.15		0.04			0.04
RCCB Type G (Short-time-delay) Surge current-proof 3 kA	30	Max. tripping time (s)	0.3		0.15			0.04		0.04
RCCB Type G (Short-time-delay) Surge current-proof 3 kA	>30	Max. tripping time (s)	0.3		0.15		0.04			0.04
RCCB Type S (Selective) Surge current-proof 5 kA	>30	Max. tripping time (s)	0.5		0.2		0.15			0.15

Tripping Characteristics (IEC/EN 61008)

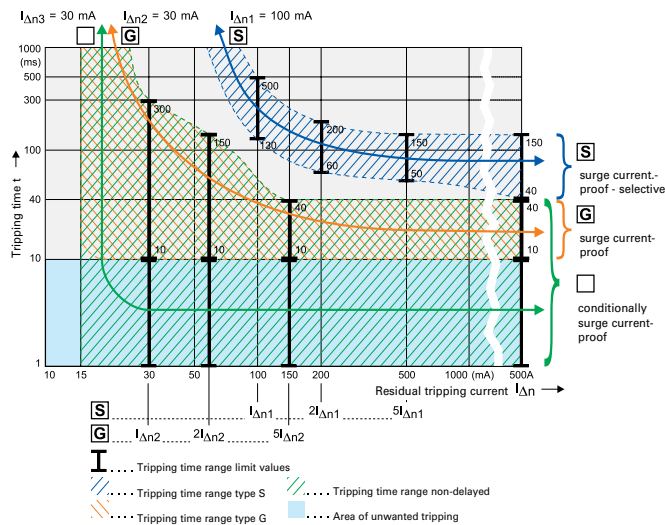Tripping characteristics, tripping time range and selectivity of instantaneous, surge current-proof „G“ and surge current-proof - selective „S“ residual current devices.



IEC 60364-4-41 deals with additional protection: The use of RCDs with a rated residual operating current not exceeding 30 mA, is recognized in a.c. systems as additional protection in the event of failure of the provision for basic protection and/or the provision for fault protection or carelessness by users.

This means when using RCDs for fault current/residual current protection two RCDs must be connected in series.

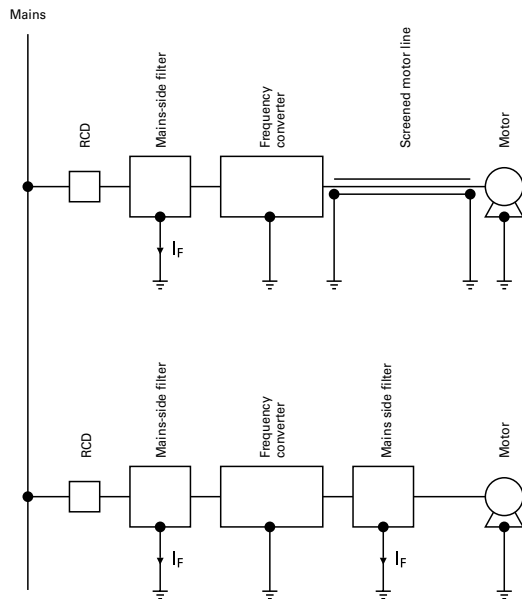
Testing:

RCDs with tripping time delay (Types -G and -S) may be function tested with conventional testing equipment which must be set according to the instructions for operation of the testing device. Due to reasons inherent in the measuring process, the tripping time determined in this way may be longer than expected in accordance with the specifications of the manufacturer of the measuring instrument.


However, the device is ok if the result of measurement is within the time range specified by the manufacturer of the measuring instrument.

Hints for the application of our frequency converter-proof RCDs:

Due to the currents flowing off through the filters (designated I_F), the sum of currents through the RCD is not exactly zero, which causes unwanted tripping.



Tripping characteristic

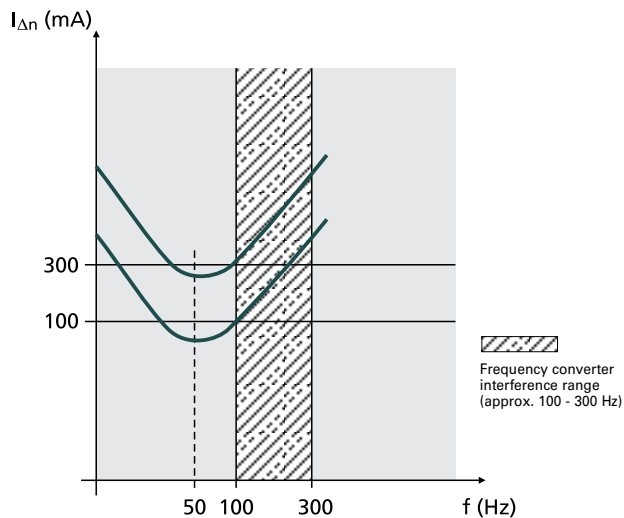

Frequency converters are used in a wide variety of systems and equipment requiring variable speed, such as lifts, escalators, conveyor belts, and large washing machines. Using them for such purposes in circuits with conventional residual current devices causes frequent problems with unwanted tripping.

The technical root cause of this phenomenon is the following: Fast switching operations involving high voltages cause high interference levels which propagate through the lines on the one hand, and in the form of interfering radiation on the other. In order to eliminate this problem, a mains-side filter (also referred to as input filter or EMC-filter) is connected between the RCD and frequency converter. The anti-interference capacitors in the filters produce discharge currents against earth which may cause unwanted tripping of the RCD due to the apparent residual currents. Connecting a filter on the output side between frequency converter and 3-phase AC motor results in the same behaviour.

This sample tripping characteristic of a 100 mA RCD and a 300 mA RCD shows the following: In the frequency range around 50 Hz, the RCDs trip as required (50 - 100 % of the indicated $I_{\Delta n}$).

In the range shown hatched in the diagram, i. e. from approx. 100 to 300 Hz, unwanted tripping occurs frequently due to the use of frequency converters. Frequency converter-proof residual current devices are much less sensitive in this frequency range than in the 50 - 60 Hz range, which leads to an enormous increase in the reliability of systems.

Therefore, we recommend to use RCDs designed for applications with frequency converter!

These special residual current devices can be recognised by an extension of the type designation („F“). They meet the requirements of compatibility between RCDs and frequency converters with respect to unwanted tripping.

These are **NOT AC/DC-sensitive** (IEC 62423) RCDs of type B !!!

Our RCDs of type „F“ are characterised by **SENSITIVITY TO RESIDUAL PULSATING DC** and **SELECTIVITY** or **SHORT-TIME DELAY**

SG02613



Description

- A complete spectrum of compact residual current devices for a wide range of applications
- For fault current/residual current protection and additional protection
- Wide variety of nominal currents
- Comprehensive range of accessories
- Real contact position indicator
- Automatic re-setting possible
- Classified for the use in rail rolling stock

$I_n/I_{\Delta n}$
(A)Operating frequency
(Hz)Type
DesignationArticle No. Units per
package**Type A****Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A** 

SG02713

**2-poles**

16/0.03	50/60	FRCmM-16/2/003-A	170430	1/60
16/0.1	50/60	FRCmM-16/2/01-A	170436	1/60
16/0.3	50/60	FRCmM-16/2/03-A	170278	1/60
16/0.5	50	FRCmM-16/2/05-A	170281	1/60
25/0.03	50/60	FRCmM-25/2/003-A	170431	1/60
25/0.1	50/60	FRCmM-25/2/01-A	170437	1/60
25/0.3	50/60	FRCmM-25/2/03-A	170279	1/60
25/0.5	50	FRCmM-25/2/05-A	170282	1/60
40/0.03	50/60	FRCmM-40/2/003-A	170432	1/60
40/0.1	50/60	FRCmM-40/2/01-A	170274	1/60
40/0.3	50/60	FRCmM-40/2/03-A	170280	1/60
40/0.5	50	FRCmM-40/2/05-A	170283	1/60
63/0.03	50/60	FRCmM-63/2/003-A	170433	1/60
63/0.1	50/60	FRCmM-63/2/01-A	170275	1/60
63/0.3	50/60	FRCmM-63/2/03-A	304063	1/60
63/0.5	50	FRCmM-63/2/05-A	170284	1/60
80/0.03	50/60	FRCmM-80/2/003-A	170434	1/60
80/0.1	50/60	FRCmM-80/2/01-A	170276	1/60
80/0.3	50/60	FRCmM-80/2/03-A	304064	1/60
100/0.03	50/60	FRCmM-100/2/003-A	170435	1/60
100/0.1	50/60	FRCmM-100/2/01-A	170277	1/60
100/0.3	50/60	FRCmM-100/2/03-A	304065	1/60

SG02613

**4-poles**

16/0.03	50/60	FRCmM-16/4/003-A	170285	1/30
16/0.03	50/60	FRCmM-16/4/003-A-400	304101	1/30
16/0.1	50/60	FRCmM-16/4/01-A	170337	1/30
16/0.3	50/60	FRCmM-16/4/03-A	170340	1/30
16/0.5	50	FRCmM-16/4/05-A	170346	1/30
25/0.03	50/60	FRCmM-25/4/003-A	170332	1/30
25/0.03	50/60	FRCmM-25/4/003-A-400	304102	1/30
25/0.1	50/60	FRCmM-25/4/01-A	170338	1/30
25/0.3	50/60	FRCmM-25/4/03-A	170341	1/30
25/0.5	50	FRCmM-25/4/05-A	170347	1/30
40/0.03	50/60	FRCmM-40/4/003-A	170333	1/30
40/0.03	50/60	FRCmM-40/4/003-A-400	304116	1/30
40/0.1	50/60	FRCmM-40/4/01-A	170339	1/30
40/0.3	50/60	FRCmM-40/4/03-A	170342	1/30
40/0.5	50	FRCmM-40/4/05-A	170348	1/30
63/0.03	50/60	FRCmM-63/4/003-A	170334	1/30
63/0.03	50/60	FRCmM-63/4/003-A-400	304167	1/30
63/0.3	50/60	FRCmM-63/4/03-A	170343	1/30
63/0.5	50	FRCmM-63/4/05-A	170349	1/30
80/0.03	50/60	FRCmM-80/4/003-A	170335	1/30
80/0.03	50/60	FRCmM-80/4/003-A-400	304186	1/30
80/0.3	50/60	FRCmM-80/4/03-A	170344	1/30
80/0.5	50	FRCmM-80/4/05-A	170350	1/30
100/0.03	50/60	FRCmM-100/4/003-A	170336	1/30
100/0.03	50/60	FRCmM-100/4/003-A-400	304194	1/30
100/0.3	50/60	FRCmM-100/4/03-A	170345	1/30
100/0.5	50	FRCmM-100/4/05-A	170351	1/30

$I_n/I_{\Delta n}$
(A)Operating frequency
(Hz)Type
DesignationArticle No. Units per
package**Type G/A****Surge current-proof 3 kA, sensitive to residual pulsating DC, Type G/A (ÖVE E 8601)**

SG02713

**2-poles**

16/0.03	50/60	FRCmM-16/2/003-G/A	170382	1/60
16/0.1	50/60	FRCmM-16/2/01-G/A	170388	1/60
16/0.3	50/60	FRCmM-16/2/03-G/A	170290	1/60
25/0.03	50/60	FRCmM-25/2/003-G/A	170383	1/60
25/0.1	50/60	FRCmM-25/2/01-G/A	170389	1/60
25/0.3	50/60	FRCmM-25/2/03-G/A	170291	1/60
40/0.03	50/60	FRCmM-40/2/003-G/A	170384	1/60
40/0.1	50/60	FRCmM-40/2/01-G/A	170286	1/60
40/0.3	50/60	FRCmM-40/2/03-G/A	170292	1/60
63/0.03	50/60	FRCmM-63/2/003-G/A	170385	1/60
63/0.1	50/60	FRCmM-63/2/01-G/A	170287	1/60
80/0.03	50/60	FRCmM-80/2/003-G/A	170386	1/60
80/0.1	50/60	FRCmM-80/2/01-G/A	170288	1/60
100/0.03	50/60	FRCmM-100/2/003-G/A	170387	1/60
100/0.1	50/60	FRCmM-100/2/01-G/A	170289	1/60

SG02613

**4-poles**

16/0.03	50/60	FRCmM-16/4/003-G/A	170293	1/30
16/0.1	50/60	FRCmM-16/4/01-G/A	170299	1/30
16/0.3	50/60	FRCmM-16/4/03-G/A	170302	1/30
25/0.03	50/60	FRCmM-25/4/003-G/A	170294	1/30
25/0.1	50/60	FRCmM-25/4/01-G/A	170300	1/30
25/0.3	50/60	FRCmM-25/4/03-G/A	170303	1/30
40/0.03	50/60	FRCmM-40/4/003-G/A	170295	1/30
40/0.1	50/60	FRCmM-40/4/01-G/A	170301	1/30
40/0.3	50/60	FRCmM-40/4/03-G/A	170304	1/30
63/0.03	50/60	FRCmM-63/4/003-G/A	170296	1/30
63/0.3	50/60	FRCmM-63/4/03-G/A	170305	1/30
80/0.03	50/60	FRCmM-80/4/003-G/A	170297	1/30
80/0.3	50/60	FRCmM-80/4/03-G/A	170306	1/30
100/0.03	50/60	FRCmM-100/4/003-G/A	170298	1/30
100/0.3	50/60	FRCmM-100/4/03-G/A	170307	1/30

$I_n/I_{\Delta n}$
(A)Operating frequency
(Hz)Type
DesignationArticle No. Units per
package**Type S****Selective + surge current-proof 5 kA, Type S**

SG02713

**2-poles**

16/0.1	50/60	FRCmM-16/2/01-S	170314	1/60
25/0.1	50/60	FRCmM-25/2/01-S	170315	1/60
40/0.1	50/60	FRCmM-40/2/01-S	170316	1/60
63/0.1	50/60	FRCmM-63/2/01-S	170317	1/60
80/0.1	50/60	FRCmM-80/2/01-S	170318	1/60
100/0.1	50/60	FRCmM-100/2/01-S	170319	1/60

SG02613

**4-poles**

16/0.1	50/60	FRCmM-16/4/01-S	170320	1/30
16/0.3	50/60	FRCmM-16/4/03-S	170324	1/30
25/0.1	50/60	FRCmM-25/4/01-S	170321	1/30
25/0.3	50/60	FRCmM-25/4/03-S	170325	1/30
40/0.1	50/60	FRCmM-40/4/01-S	170322	1/30
40/0.3	50/60	FRCmM-40/4/03-S	170326	1/30
63/0.1	50/60	FRCmM-63/4/01-S	170323	1/30
63/0.3	50/60	FRCmM-63/4/03-S	170327	1/30
80/0.3	50/60	FRCmM-80/4/03-S	170328	1/30
100/0.3	50/60	FRCmM-100/4/03-S	170329	1/30

Type S/A**Selective + surge current-proof 5 kA, sensitive to residual pulsating DC, Type S/A**

SG02713

**2-poles**

16/0.1	50/60	FRCmM-16/2/01-S/A	170330	1/60
25/0.1	50/60	FRCmM-25/2/01-S/A	170331	1/60
40/0.1	50/60	FRCmM-40/2/01-S/A	170438	1/60
63/0.1	50/60	FRCmM-63/2/01-S/A	170439	1/60
80/0.1	50/60	FRCmM-80/2/01-S/A	170440	1/60
100/0.1	50/60	FRCmM-100/2/01-S/A	170441	1/60

SG02613

**4-poles**

16/0.1	50/60	FRCmM-16/4/01-S/A	170442	1/30
16/0.3	50/60	FRCmM-16/4/03-S/A	170446	1/30
25/0.1	50/60	FRCmM-25/4/01-S/A	170443	1/30
25/0.3	50/60	FRCmM-25/4/03-S/A	170447	1/30
40/0.1	50/60	FRCmM-40/4/01-S/A	170444	1/30
40/0.3	50/60	FRCmM-40/4/03-S/A	170448	1/30
63/0.1	50/60	FRCmM-63/4/01-S/A	170445	1/30
63/0.3	50/60	FRCmM-63/4/03-S/A	170449	1/30
80/0.3	50/60	FRCmM-80/4/03-S/A	170450	1/30
100/0.3	50/60	FRCmM-100/4/03-S/A	170451	1/30

$I_n/I_{\Delta n}$ (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
---------------------------	-----------------------------	---------------------	-------------	----------------------

Type U

Short-time delayed + surge current-proof 3 kA, frequency converter-proof, Type U 

4-poles

16/0.03	50/60	FRCmM-16/4/003-U	170452	1/30
25/0.03	50/60	FRCmM-25/4/003-U	170453	1/30
40/0.03	50/60	FRCmM-40/4/003-U	170454	1/30
63/0.03	50/60	FRCmM-63/4/003-U	170455	1/30
80/0.03	50/60	FRCmM-80/4/003-U	170456	1/30
100/0.03	50/60	FRCmM-100/4/003-U	170457	1/30

SG02613



Type U

Selective + surge current-proof 5 kA, frequency converter-proof, Type U 

4-poles

16/0.1	50/60	FRCmM-16/4/01-U	170458	1/30
16/0.3	50/60	FRCmM-16/4/03-U	170462	1/30
25/0.1	50/60	FRCmM-25/4/01-U	170459	1/30
25/0.3	50/60	FRCmM-25/4/03-U	170463	1/30
40/0.1	50/60	FRCmM-40/4/01-U	170460	1/30
40/0.3	50/60	FRCmM-40/4/03-U	170464	1/30
63/0.1	50/60	FRCmM-63/4/01-U	170461	1/30
63/0.3	50/60	FRCmM-63/4/03-U	170465	1/30
80/0.3	50/60	FRCmM-80/4/03-U	170466	1/30
100/0.3	50/60	FRCmM-100/4/03-U	170467	1/30

SG02613



Type R

Surge current-proof 3 kA, X-ray application, Type R 

4-poles

16/0.03	50/60	FRCmM-16/4/003-R	170308	1/30
25/0.03	50/60	FRCmM-25/4/003-R	170309	1/30
40/0.03	50/60	FRCmM-40/4/003-R	170310	1/30
63/0.03	50/60	FRCmM-63/4/003-R	170311	1/30
80/0.03	50/60	FRCmM-80/4/003-R	170312	1/30
100/0.03	50/60	FRCmM-100/4/003-R	170313	1/30

SG02613



$I_n/I_{\Delta n}$ (A)	Operating frequency (Hz)	Type Designation	Article No.	Units per package
---------------------------	-----------------------------	---------------------	-------------	----------------------

Type A**Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A****2-poles**

16/0.03	50/60	FRCmM-16/4/003-A-RT	305061	1/30
25/0.03	50/60	FRCmM-25/4/003-A-RT	305062	1/30
40/0.03	50/60	FRCmM-40/4/003-A-RT	305063	1/30
63/0.03	50/60	FRCmM-63/4/003-A-RT	305064	1/30
16/0.3	50/60	FRCmM-16/4/03-A-RT	305067	1/30
25/0.3	50/60	FRCmM-25/4/03-A-RT	305068	1/30
40/0.3	50/60	FRCmM-40/4/03-A-RT	305069	1/30
63/0.3	50/60	FRCmM-63/4/03-A-RT	305070	1/30

4-poles

16/0.03	50/60	FRCMM-16/4/003-A-RT	305081	1/30
25/0.03	50/60	FRCMM-25/4/003-A-RT	305082	1/30
40/0.03	50/60	FRCMM-40/4/003-A-RT	305083	1/30
63/0.03	50/60	FRCMM-63/4/003-A-RT	305084	1/30
16/0.3	50/60	FRCMM-16/4/03-A-RT	305088	1/30
25/0.3	50/60	FRCMM-25/4/03-A-RT	305090	1/30
40/0.3	50/60	FRCMM-40/4/03-A-RT	305101	1/30
63/0.3	50/60	FRCMM-63/4/03-A-RT	305102	1/30

Type S**Selective + surge current-proof 5 kA, Type S****2-poles**

16/0.3	50/60	FRCMM-16/2/03-S/A-RT	305071	1/30
25/0.3	50/60	FRCMM-25/2/03-S/A-RT	305073	1/30
40/0.3	50/60	FRCMM-40/2/03-S/A-RT	305076	1/30
63/0.3	50/60	FRCMM-63/2/03-S/A-RT	305077	1/30

4-poles

16/0.3	50/60	FRCMM-16/4/03-S/A-RT	305104	1/30
25/0.3	50/60	FRCMM-25/4/03-S/A-RT	305109	1/30
40/0.3	50/60	FRCMM-40/4/03-S/A-RT	305110	1/30
63/0.3	50/60	FRCMM-63/4/03-S/A-RT	305111	1/30

SG02613



SG02613



SG02613



SG02613



Specifications | Residual Current Devices FRCmM

Description

- Residual current devices
- Shape compatible with and suitable for standard busbar connection to other devices of the xEffect-series
- Twin-purpose terminal (lift/open-mouthed) above and below
- Busbar positioning optionally above or below
- Free terminal space despite installed busbar
- Universal tripping signal switch, also suitable for FAZ, FRBmM-1N can be mounted subsequently
- Auxiliary switch Z-HK can be mounted subsequently
- Contact position indicator red - green
- Delayed types suitable for being used with standard fluorescent tubes with or without electronical ballast (30mA-RCD: 30 units per phase conductor, 100mA-RCD: 90 units per phase conductor).
Notes: Depending of the fluorescent lamp ballast manufacturer partly more possible. Symmetrical allocation of the fluorescent lamp ballasts on all phases favourably. Shifting references of the fluorescent lamp ballast manufacturer consider.
- The device functions irrespective of the position of installation
- Tripping is line voltage-independent. Consequently, the RCD is suitable for "fault current/residual current protection" and "additional protection" within the meaning of the applicable installation rules.
- Mains connection at either side
- The 4-pole device can also be used for 2- or 3-pole connection:
See connection possibilities.
- The test key "T" must be pressed every 6 months. The system operator must be informed of this obligation and his responsibility in a way that can be proven (self-adhesive RCD-label enclosed). Under special conditions (e.g. damply and/or dusty environments, environments with polluting and/or corroding conditions, environments with large temperature fluctuations, installations with a risk of overvoltages due to switching of equipment and/or atmospheric discharges, portable equipment ...), it's recommended to test in monthly intervals.
- Pressing the test key "T" serves the only purpose of function testing the residual current device (RCD). This test does not make earthing resistance measurement (R_E), or proper checking of the earth conductor condition redundant, which must be performed separately.
- **Type -A:** Protects against special forms of residual pulsating DC which have not been smoothed.
- **Type -G:** High reliability against unwanted tripping. Suitable for any circuit where personal injury or damage to property may occur in case of unwanted tripping.
- **Type -G/A:** Additionally protects against special forms of residual pulsating DC which have not been smoothed.
- **Type -R:** To avoid unwanted tripping due to X-ray devices.
- **Type -S:** Selective residual current device sensitive to AC, Type -S. Suitable for systems with surge arresters downstream of the RCD.
- **Type -S/A:** Additionally protects against special forms of residual pulsating DC which have not been smoothed.
- **Type -U:** Suitable for speed-controlled drives with frequency converters in household, trade, and industry. Unwanted tripping is avoided thanks to a tripping characteristic designed particularly for frequency converters.

Accessories:


Auxiliary switch for subsequent installation to the left	Z-HK	248432
Tripping signal contact for subsequent installation to the right	Z-NHK	248434
Automatic restarting device	Z-FW/LP	248296
	Z-FW-LPD	265244
Remote control	Z-FW-MO	284730
Pre-mounted sets	Z-FW-LP/MO	290171
	Z-FW-LPD/MO	290172
Remote testing module	Z-FW/003	248298
	Z-FW/010	248299
	Z-FW/030	248300
	Z-FW/050	248301
Terminal cover 4-poles	Z-RC/AK-4TE	101062

Technical Data




		FRCmM
Electrical		
Design according to		IEC/EN 61008 Type G acc. to ÖVE E 8601 IEC 61373, EN 45545-2
Classified according to		
Current test marks as printed onto the device		
Tripping		instantaneous
Type G , R		10 ms delay @ 50 Hz
Type S		40 ms delay @ 50 Hz - with selective disconnecting function
Type U (only 30 mA)		10 ms delay @ 50 Hz
Type U (except 30 mA)		40 ms delay @ 50 Hz - with selective disconnecting function
Rated voltage	U_n	240/415 V AC 50 Hz and/or 60 Hz – see individual article for operating frequency
Limits operation voltage test circuit		
2-poles		196 - 264 V~
4-poles 30 mA		196 - 264 V~
4-poles 30 mA -400		353 - 456 V~
4-poles 100, 300, 500 mA		196 - 456 V~
Rated tripping current	$I_{\Delta n}$	30, 100, 300, 500 mA
Sensitivity		AC and pulsating DC
Rated insulation voltage	U_i	440 V
Rated impulse withstand voltage	U_{imp}	4 kV (1.2/50µs)
Rated short circuit capacity	I_{cn}	10 kA with back-up fuse
Peak withstand current		
Type AC, A		250 A (8/20 µs) surge current-proof
Type G, G/A		3 kA (8/20 µs) surge current-proof, 10 ms delay
Type S, S/A		5 kA (8/20 µs) surge current-proof, 40 ms delay
Rated breaking capacity	I_m	
or rated fault breaking capacity	$I_{\Delta m}$	
$I_n = 16-40$ A		500 A
$I_n = 63$ A		630 A
$I_n = 80$ A		800 A
$I_n = 100$ A		1,000 A
Endurance		
electrical components		≥ 4,000 operating cycles
mechanical components		≥ 20,000 operating cycles
Mechanical		
Frame size		45 mm
Device height		80 mm
Device width		35 mm (2MU), 70 mm (4MU)
Mounting		quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715
Degree of protection, built-in		IP40
Degree of pretection in moisture-proof enclosure		IP54
Upper and lower terminals		open mouthed/lift terminals
Terminal protection		finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity		1.5 - 35 mm ² single wire 2 x 16 mm ² multi wire
Terminal screw		M5 (with slotted screw acc. to EN ISO 4757-Z2, Pozidriv PZ2)
Terminal torque		2 - 2.4 Nm
Busbar thickness		0.8 - 2 mm
Operation temperature		-25°C to +40°C (for higher values see table on ambient temperature)
Storage- and transport temperature		-35°C to +60°C
Resistance to climatic conditions		acc. to IEC/EN 61008
Contact position indicator		red / green
Tripping indicator		white / blue

Connection diagram


2-poles




4-poles

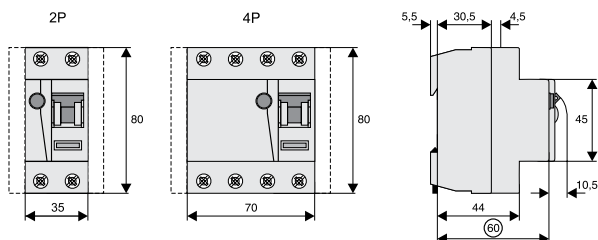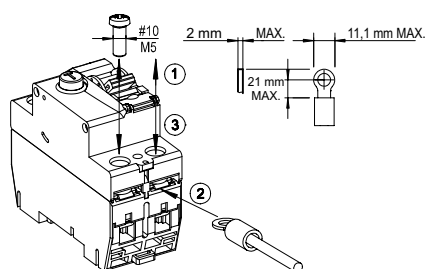**Dimensions (mm)****Connection of ring cable lugs (only FRC...RT)****Correct connection****2-poles**


30, 100, 300, 500mA Types:

**4-poles**


30mA -400 Types:

**4-poles**

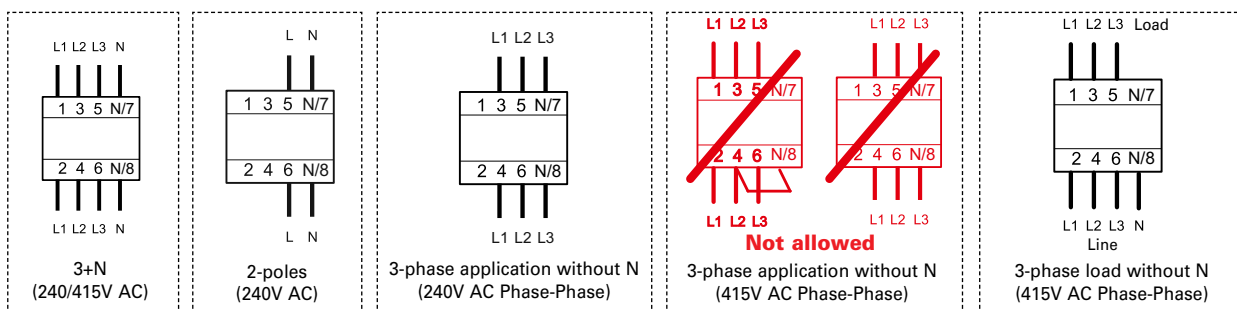30mA Types:



100, 300, 500mA Types:

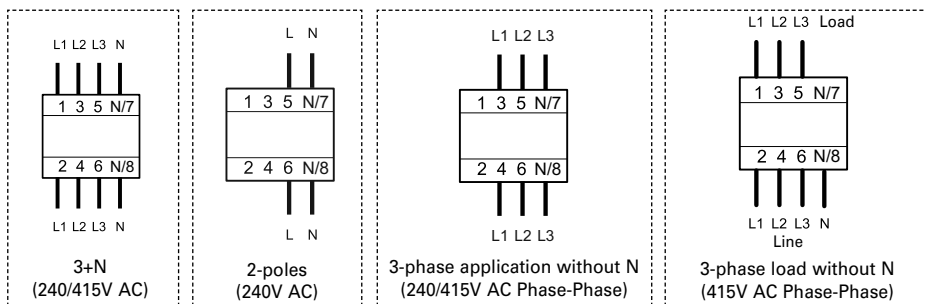

Power Loss at I_n FRCmM

(entire unit)

Tripping: AC

I_n [A]	$I_{\Delta n}$ [mA]	P [W]
2-poles		
16	10	2.9
25	30	2.0
25	100, 300, 500	1.3
40	30	7.8
40	100, 300, 500	5.5
63	30	9.7
63	100, 300, 500	7.2
80	30	13.5
80	100, 300, 500	8.6
100	30, 100, 300	13.6
4-poles		
25	30	3.1
25	100, 300, 500	2.8
40	30	13.1
40	100, 300, 500	8.8
63	30	13.4
63	100, 300, 500	10.5
80	30, 100, 300, 500	11.4
100	30, 100, 300, 500	18.8

Tripping: G, G/A

I_n [A]	$I_{\Delta n}$ [mA]	P [W]
2-poles		
25	30, 100 (G)	2.0
40	30, 100 (G)	7.8
4-poles		
40	30 (G)	13.1
40	100 (G, G/A)	8.8
40	30 (G/A)	13.1
63	30 (G)	13.4
63	100 (G, G/A)	10.5
63	30 (G/A)	13.4
100	30, 300 (G/A)	18.8

Tripping: R, U

I_n [A]	$I_{\Delta n}$ [mA]	P [W]
4-poles		
40	100, 300 (U)	8.4
63	30 (R)	13.4
63	100, 300 (U)	10.5
100	300 (U)	18.8

Tripping: A

I_n [A]	$I_{\Delta n}$ [mA]	P [W]
2-poles		
16	10	2.9
16	30	1.2
25	30	2.0
25	100, 300	1.3
40	30	7.8
40	100, 300, 500	5.5
63	30	9.7
63	100, 300, 500	7.2
100	30, 100, 300	13.6
4-poles		
25	30	3.1
25	100, 300, 500	2.8
40	30	13.1
40	100, 300, 500	8.8
63	30, 100, 300, 500	10.5
80	30, 300	11.4
100	30, 100, 300, 500	18.8

Tripping: S, S/A

I_n [A]	$I_{\Delta n}$ [mA]	P [W]
2-poles		
40	100 (S, S/A)	7.8
40	300 (S)	5.5
4-poles		
25	100, 300 (S)	2.8
25	100 (S/A)	2.8
40	100, 300 (S, S/A)	8.8
63	100, 300 (S)	10.5
63	100, 300 (S/A)	10.5
80	100, 300 (S)	11.4
80	300 (S/A)	11.4
100	300 (S/A)	18.8

Impact of ambient temperature on the maximum permanent current allowed (A) FRCmM

Ambient temperature	25A		40A		63A		80A		100A	
	2p	4p	2p	4p	2p	4p	2p	4p	2p	4p
40°	25	25	40	40	63	63	80	80	100	100
45°	21	22	37	37	59	59	76	76	95	95
50°	18	19	33	34	55	55	72	72	90	90
55°	14	16	30	31	50	50	68	68	85	85
60°	—	—	26	27	45	45	64	64	80	80
65°	—	—	20	24	40	41	60	60	75	75
70°	—	—	14	19	34	37	56	56	70	70
75°	—	—	8	15	28	32	52	52	65	65

Note: Please make sure that these values are not exceeded and that any upstream thermal overload protection switches off in time.

Max. back-up fuse FRCmM

Rating In [A]	Fuses		MCB's (Characteristic B/C)	
	Short Circuit [A]	Overload [A]	Short Circuit [A]	Overload [A]
25	63 gG/gI	25 gG/gI	FAZ-C40	FAZ-C25
40	63 gG/gI	40 gG/gI	FAZ-C40	FAZ-C40
63	63 gG/gI	63 gG/gI	FAZ-C40	FAZ-C40
80	80 gG/gI	80 gG/gI	-	-
100	100 gG/gI	80 gG/gI	-	-

Important:

In the case that the maximal possible operating current of the electrical installation don't exceed the rated current of the RCD only short circuit protection must be implemented. Overload protection must be implemented in the case if the maximal possible operating current of the electrical installation can exceed the rated current of the RCD.

$I_n/I_{\Delta n}$
(A)Type
Designation

Article No.

Units per
package**Type AC****Conditionally surge current-proof 250 A, Type AC** **2-poles**

25/0.03	FRCmM-25/2/003-110	180585	1/60
25/0.3	FRCmM-25/2/03-110	180586	1/60
40/0.03	FRCmM-40/2/003-110	180587	1/60
40/0.3	FRCmM-40/2/03-110	180588	1/60
63/0.03	FRCmM-63/2/003-110	180589	1/60
63/0.3	FRCmM-63/2/03-110	180590	1/60
80/0.03	FRCmM-80/2/003-110	180591	1/60
80/0.3	FRCmM-80/2/03-110	180592	1/60
100/0.03	FRCmM-100/2/003-110	180593	1/60
100/0.3	FRCmM-100/2/03-110	180594	1/60

4-poles

25/0.03	FRCmM-25/4/003-110	180595	1/30
25/0.3	FRCmM-25/4/03-110	180596	1/30
40/0.03	FRCmM-40/4/003-110	180597	1/30
40/0.3	FRCmM-40/4/03-110	180598	1/30
63/0.03	FRCmM-63/4/003-110	180599	1/30
63/0.3	FRCmM-63/4/03-110	180600	1/30
80/0.03	FRCmM-80/4/003-110	180601	1/30
80/0.3	FRCmM-80/4/03-110	180602	1/30
100/0.03	FRCmM-100/4/003-110	180603	1/30
100/0.3	FRCmM-100/4/03-110	180604	1/30

Type A**Conditionally surge current-proof 250 A, sensitive to residual pulsating DC, Type A** **2-poles**

25/0.03	FRCmM-25/2/003-A-110	180605	1/60
25/0.3	FRCmM-25/2/03-A-110	180606	1/60
40/0.03	FRCmM-40/2/003-A-110	180607	1/60
40/0.3	FRCmM-40/2/03-A-110	180608	1/60
63/0.03	FRCmM-63/2/003-A-110	180609	1/60
80/0.03	FRCmM-80/2/003-A-110	180610	1/60
100/0.03	FRCmM-100/2/003-A-110	180611	1/60

4-poles

25/0.03	FRCmM-25/4/003-A-110	180612	1/30
25/0.3	FRCmM-25/4/03-A-110	180613	1/30
40/0.03	FRCmM-40/4/003-A-110	180614	1/30
40/0.3	FRCmM-40/4/03-A-110	180615	1/30
63/0.03	FRCmM-63/4/003-A-110	180616	1/30
63/0.3	FRCmM-63/4/03-A-110	180617	1/30
80/0.03	FRCmM-80/4/003-A-110	180618	1/30
80/0.3	FRCmM-80/4/03-A-110	180619	1/30
100/0.03	FRCmM-100/4/003-A-110	180620	1/30
100/0.3	FRCmM-100/4/03-A-110	180621	1/30

SG02713



SG02613



SG02713




SG02613




Technical Data

FRCmM-110	
Electrical	
Design according to	IEC/EN 61008
Classified according to	IEC 61373, EN 45545-2
Current test marks as printed onto the device	
Tripping	instantaneous
Rated voltage	U_n 110/190V AC, Type AC: 50 Hz, Type A: 50/60 Hz
Limits operation voltage test circuit	2-poles 94 - 121 V~ 4-poles 30 mA 94 - 121 V~ 4-poles 300 mA 94 - 210 V~
Rated tripping current	$I_{\Delta n}$ 30, 300 mA
Sensitivity	AC and pulsating DC
Rated insulation voltage	U_i 440 V
Rated impulse withstand voltage	U_{imp} 4 kV (1.2/50µs)
Rated short circuit capacity	I_{cn} 10 kA with back-up fuse
Peak withstand current	
Type AC, A	250 A (8/20 µs) surge current-proof
Rated breaking capacity	I_m
or rated fault breaking capacity	$I_{\Delta m}$
$I_n = 16-40$ A	500 A
$I_n = 63$ A	630 A
$I_n = 80$ A	800 A
$I_n = 100$ A	1,000 A
Endurance	
electrical components	≥ 4,000 operating cycles
mechanical components	≥ 20,000 operating cycles
Mechanical	
Frame size	45 mm
Device height	80 mm
Device width	35 mm (2MU), 70 mm (4MU)
Mounting	quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715
Degree of protection, built-in	IP40
Degree of pretection in moisture-proof enclosure	IP54
Upper and lower terminals	open mouthed/lift terminals
Terminal protection	finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity	1.5 - 35 mm ² single wire 2 x 16 mm ² multi wire
Terminal screw	M5 (with slotted screw acc. to EN ISO 4757-Z2, Pozidriv PZ2)
Terminal torque	2 - 2.4 Nm
Busbar thickness	0.8 - 2 mm
Operation temperature	-25°C to +40°C (for higher values see table on ambient temperature)
Storage- and transport temperature	-35°C to +60°C
Resistance to climatic conditions	acc. to IEC/EN 61008
Contact position indicator	red / green
Tripping indicator	white / blue

Connection diagram



Dimensions (mm)

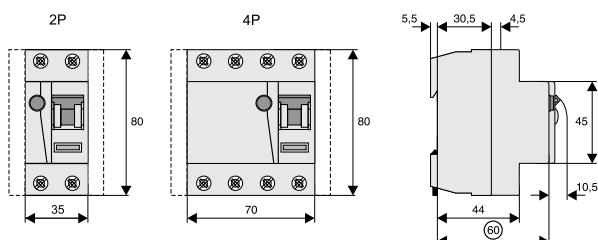

Power Loss at I_n FRCmM-110

(entire unit)

Tripping: AC

I_n [A]	$I_{\Delta n}$ [mA]	P [W]
2-poles		
25	30	2.0
25	100, 300, 500	1.3
40	30	7.8
40	100, 300, 500	5.5
63	30	9.7
63	100, 300, 500	7.2
80	30	13.5
80	100, 300, 500	8.6
100	30, 100, 300	13.6
4-poles		
25	30	3.1
25	100, 300, 500	2.8
40	30	13.1
40	100, 300, 500	8.8
63	30	13.4
63	100, 300, 500	10.5
80	30, 100, 300, 500	11.4
100	30, 100, 300, 500	18.8

Tripping: A

I_n [A]	$I_{\Delta n}$ [mA]	P [W]
2-poles		
16	30	1.2
25	30	2.0
25	100, 300	1.3
40	30	7.8
40	100, 300, 500	5.5
63	30	9.7
63	100, 300, 500	7.2
100	30, 100, 300	13.6
4-poles		
25	30	3.1
25	100, 300, 500	2.8
40	30	13.1
40	100, 300, 500	8.8
63	30, 100, 300, 500	10.5
80	30, 300	11.4
100	30, 100, 300, 500	18.8

sg01616



Description

- Increased protection in applications with 1-phase frequency converter due to the detection of mixed frequencies
- Reduction of nuisance tripping thanks to
 - time delayed tripping
 - increased current withstand capability > 3kA
- Higher load rating with DC residual currents up to 10 mA
- For fault current/residual current protection and additional protection
- Wide variety of nominal currents
- Comprehensive range of accessories
- Real contact position indicator
- Fault current tripping indicator
- Transparent designation plate
- Classified for the use in rail rolling stock

$I_n/I_{\Delta n}$
(A)Type
Designation

Article No.

Units per
package**Type G/F****Surge current-proof 3 kA, sensitive to residual pulsating DC, Type G/F (ÖVE E 8601)**  

sg01516


**2-poles**

16/0.03	FRCMM-16/2/003-G/F	187365	1/60
16/0.1	FRCMM-16/2/01-G/F	187371	1/60
16/0.3	FRCMM-16/2/03-G/F	187377	1/60
25/0.03	FRCMM-25/2/003-G/F	187366	1/60
25/0.1	FRCMM-25/2/01-G/F	187372	1/60
25/0.3	FRCMM-25/2/03-G/F	187378	1/60
40/0.03	FRCMM-40/2/003-G/F	187367	1/60
40/0.1	FRCMM-40/2/01-G/F	187373	1/60
40/0.3	FRCMM-40/2/03-G/F	187379	1/60
63/0.03	FRCMM-63/2/003-G/F	187368	1/60
63/0.1	FRCMM-63/2/01-G/F	187374	1/60
63/0.3	FRCMM-63/2/03-G/F	187380	1/60
80/0.03	FRCMM-80/2/003-G/F	187369	1/60
80/0.1	FRCMM-80/2/01-G/F	187375	1/60
80/0.3	FRCMM-80/2/03-G/F	187381	1/60
100/0.03	FRCMM-100/2/003-G/F	187370	1/60
100/0.1	FRCMM-100/2/01-G/F	187376	1/60
100/0.3	FRCMM-100/2/03-G/F	187382	1/60

sg01616

**4-poles**

16/0.03	FRCMM-16/4/003-G/F	187407	1/30
16/0.1	FRCMM-16/4/01-G/F	187413	1/30
16/0.3	FRCMM-16/4/03-G/F	187419	1/30
25/0.03	FRCMM-25/4/003-G/F	187408	1/30
25/0.1	FRCMM-25/4/01-G/F	187414	1/30
25/0.3	FRCMM-25/4/03-G/F	187420	1/30
40/0.03	FRCMM-40/4/003-G/F	187409	1/30
40/0.1	FRCMM-40/4/01-G/F	187415	1/30
40/0.3	FRCMM-40/4/03-G/F	187421	1/30
63/0.03	FRCMM-63/4/003-G/F	187410	1/30
63/0.1	FRCMM-63/4/01-G/F	187416	1/30
63/0.3	FRCMM-63/4/03-G/F	187422	1/30
80/0.03	FRCMM-80/4/003-G/F	187411	1/30
80/0.1	FRCMM-80/4/01-G/F	187417	1/30
80/0.3	FRCMM-80/4/03-G/F	187423	1/30
100/0.03	FRCMM-100/4/003-G/F	187412	1/30
100/0.1	FRCMM-100/4/01-G/F	187418	1/30
100/0.3	FRCMM-100/4/03-G/F	187424	1/30

$I_n/I_{\Delta n}$
(A)Type
DesignationArticle No. Units per
package**Type S/F****Selective + surge current-proof 5 kA, sensitive to residual pulsating DC, Type S/F**

sg01516

**2-poles**

16/0.1	FRCMM-16/2/01-S/F	187389	1/60
16/0.3	FRCMM-16/2/03-S/F	187395	1/60
25/0.1	FRCMM-25/2/01-S/F	187390	1/60
25/0.3	FRCMM-25/2/03-S/F	187396	1/60
40/0.1	FRCMM-40/2/01-S/F	187391	1/60
40/0.3	FRCMM-40/2/03-S/F	187397	1/60
63/0.1	FRCMM-63/2/01-S/F	187392	1/60
63/0.3	FRCMM-63/2/03-S/F	187398	1/60
80/0.1	FRCMM-80/2/01-S/F	187393	1/60
80/0.3	FRCMM-80/2/03-S/F	187399	1/60
100/0.1	FRCMM-100/2/01-S/F	187394	1/60
100/0.3	FRCMM-100/2/03-S/F	187400	1/60

sg01616

**4-poles**

16/0.1	FRCMM-16/4/01-S/F	187431	1/30
16/0.3	FRCMM-16/4/03-S/F	187437	1/30
25/0.1	FRCMM-25/4/01-S/F	187432	1/30
25/0.3	FRCMM-25/4/03-S/F	187438	1/30
40/0.1	FRCMM-40/4/01-S/F	187433	1/30
40/0.3	FRCMM-40/4/03-S/F	187439	1/30
63/0.1	FRCMM-63/4/01-S/F	187434	1/30
63/0.3	FRCMM-63/4/03-S/F	187440	1/30
80/0.1	FRCMM-80/4/01-S/F	187435	1/30
80/0.3	FRCMM-80/4/03-S/F	187441	1/30
100/0.1	FRCMM-100/4/01-S/F	187436	1/30
100/0.3	FRCMM-100/4/03-S/F	187442	1/30

Specifications | Residual Current Devices FRCmM, Type F

Description

- Residual current devices
 - Shape compatible with and suitable for standard busbar connection to other devices of the xEffect-series
 - Twin-purpose terminal (lift/open-mouthed) above and below
 - Busbar positioning optionally above or below
 - Free terminal space despite installed busbar
 - Universal tripping signal switch, also suitable for FAZ, FRBmM-1N can be mounted subsequently
 - Auxiliary switch Z-HK can be mounted subsequently
 - Contact position indicator red - green
 - Delayed types suitable for being used with standard fluorescent tubes with or without electronical ballast (30mA-RCD: 30 units per phase conductor, 100mA-RCD: 90 units per phase conductor).
- Notes: Depending of the fluorescent lamp ballast manufacturer partly more possible. Symmetrical allocation of the fluorescent lamp ballasts on all phases favourably. Shifting references of the fluorescent lamp ballast manufacturer consider.
- The device functions irrespective of the position of installation
 - Tripping is line voltage-independent. Consequently, the RCD is suitable for "fault current/residual current protection" and "additional protection" within the meaning of the applicable installation rules.
 - Mains connection at either side
 - The 4-pole device can also be used for 2- or 3-pole connection: See connection possibilities.
 - The test key "T" must be pressed every 6 months. The system operator must be informed of this obligation and his responsibility in a way that can be proven (self-adhesive RCD-label enclosed). Under special conditions (e.g. damply and/or dusty environments, environments with polluting and/or corroding conditions, environments with large temperature fluctuations, installations with a risk of overvoltages due to switching of equipment and/or atmospheric discharges, portable equipment ...), it's recommended to test in monthly intervals.
 - Pressing the test key "T" serves the only purpose of function testing the residual current device (RCD). This test does not make earthing resistance measurement (R_E), or proper checking of the earth conductor condition redundant, which must be performed separately.
- **Type -F:** Increased protection in applications with 1-phase frequency, higher load rating with DC residual currents up to 10 mA.

Accessories:


Auxiliary switch for subsequent installation to the left	Z-HK	248432
Tripping signal contact for subsequent installation to the right	Z-NHK	248434
Automatic restarting device	Z-FW/LP	248296
	Z-FW-LPD	265244
	Z-FW-MO	284730
	Z-FW-LP/MO	290171
	Z-FW-LPD/MO	290172
	Z-FW/003	248298
	Z-FW/010	248299
	Z-FW/030	248300
	Z-FW/050	248301
Terminal cover 2-poles	Z-RC/AK-2TE	285385
Terminal cover 4-poles	Z-RC/AK-4TE	101062

Technical Data


FRCmM, Type F	
Electrical	
Design according to	IEC/EN 62423
Classified according to	Type G acc. to ÖVE E 8601
Current test marks as printed onto the device	IEC 61373, EN 45545-2
Tripping	
Type G	10 ms delay
Type S	40 ms delay - with selective disconnecting function
Rated voltage	U_n 240/415 V AC, 50/60 Hz
Limits operation voltage test circuit	
2-poles	196 - 264 V~
4-poles 30 mA	196 - 264 V~
4-poles 100, 300 mA	196 - 456 V~
Rated tripping current	$I_{\Delta n}$ 30, 100, 300 mA
Sensitivity	AC and pulsating DC
Rated insulation voltage	U_i 440 V
Rated impulse withstand voltage	U_{imp} 4 kV (1.2/50µs)
Rated short circuit capacity	I_{cn} 10 kA with back-up fuse
Peak withstand current	
Type G/F	3 kA (8/20 µs) surge current-proof, 10 ms delay
Type S/F	5 kA (8/20 µs) surge current-proof, 40 ms delay
Rated breaking capacity	I_m
or rated fault breaking capacity	$I_{\Delta m}$
$I_n = 16-40$ A	500 A
$I_n = 63$ A	630 A
$I_n = 80$ A	800 A
$I_n = 100$ A	1,000 A
Endurance	
electrical components	≥ 4,000 operating cycles
mechanical components	≥ 20,000 operating cycles
Mechanical	
Frame size	45 mm
Device height	80 mm
Device width	35 mm (2MU), 70 mm (4MU)
Mounting	quick fastening with 2 lock-in positions on DIN rail IEC/EN 60715
Degree of protection, built-in	IP40
Degree of protection in moisture-proof enclosure	IP54
Upper and lower terminals	open mouthed/lift terminals
Terminal protection	finger and hand touch safe, DGUV VS3, EN 50274
Terminal capacity	1.5 - 35 mm ² single wire 2 x 16 mm ² multi wire
Terminal screw	M5 (with slotted screw acc. to EN ISO 4757-Z2, Pozidriv PZ2)
Terminal torque	2 - 2.4 Nm
Busbar thickness	0.8 - 2 mm
Operation temperature	-25°C to +40°C (for higher values see table on ambient temperature)
Storage- and transport temperature	-35°C to +60°C
Resistance to climatic conditions	acc. to IEC/EN 62423
Contact position indicator	red / green
Tripping indicator	white / blue

Connection diagram


2-poles



4-poles




Dimensions (mm)

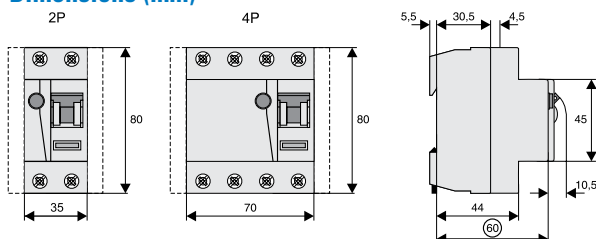


Correct connection**2-poles**


30, 100, 300mA Types:

**4-poles**

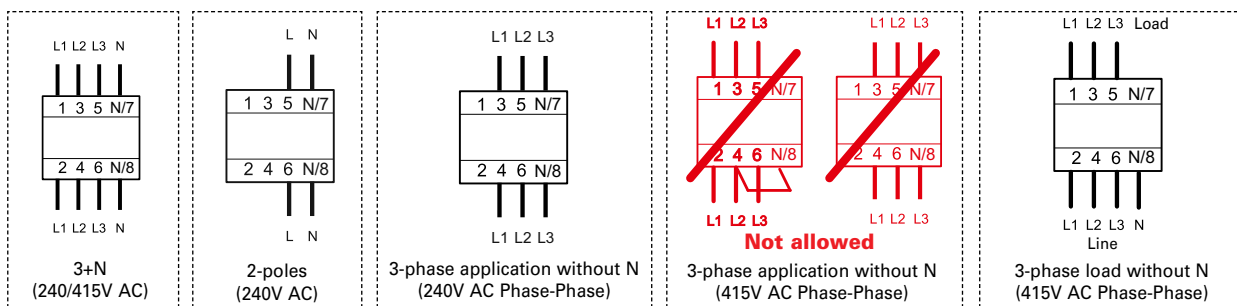30mA Types:



100, 300mA Types:

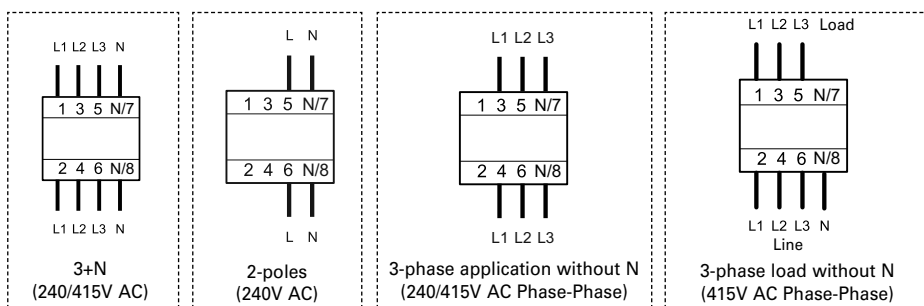**Impact of ambient temperature on the maximum permanent current allowed (A) FRCmM, Type F**

Ambient temperature	25A		40A		63A		80A		100A	
	2p	4p	2p	4p	2p	4p	2p	4p	2p	4p
40°	25	25	40	40	63	63	80	80	100	100
45°	21	22	37	37	59	59	76	76	95	95
50°	18	19	33	34	55	55	72	72	90	90
55°	14	16	30	31	50	50	68	68	85	85
60°	—	—	26	27	45	45	64	64	80	80
65°	—	—	20	24	40	41	60	60	75	75
70°	—	—	14	19	34	37	56	56	70	70
75°	—	—	8	15	28	32	52	52	65	65

Note: Please make sure that these values are not exceeded and that any upstream thermal overload protection switches off in time.

Max. back-up fuse FRCmM, Type F

Rating In [A]	Fuses		MCB's (Characteristic B/C)	
	Short Circuit [A]	Overload [A]	Short Circuit [A]	Overload [A]
25	63 gG/gI	25 gG/gI	FAZ-C40	FAZ-C25
40	63 gG/gI	40 gG/gI	FAZ-C40	FAZ-C40
63	63 gG/gI	63 gG/gI	FAZ-C40	FAZ-C40
80	80 gG/gI	80 gG/gI	-	-
100	100 gG/gI	80 gG/gI	-	-

Important:

In the case that the maximal possible operating current of the electrical installation don't exceed the rated current of the RCD only short circuit protection must be implemented. Overload protection must be implemented in the case if the maximal possible operating current of the electrical installation can exceed the rated current of the RCD.

Eaton's electrical business is a global leader with deep regional application expertise in power distribution and circuit protection; power quality, backup power and energy storage; control and automation; life safety and security; structural solutions; and harsh and hazardous environment solutions. Through end-to-end services, channel and an integrated digital platform & insights Eaton is powering what matters across industries and around the world, helping customers solve their most critical electrical power management challenges.

For more information, visit [Eaton.com](https://www.eaton.com).



Eaton Industries (Austria) GmbH
Scheydgasse 42
1210 Vienna
Austria

Eaton
EMEA Headquarters
Route de la Longeraie 7
1110 Morges, Switzerland

© 2021 Eaton
All Rights Reserved
Printed in Austria
Publication No. CA003018EN
Article number 302003-MK
April 2021
Graphics: SRA, Schrems

Changes to the products, to the information contained in this document, and to prices are reserved; as are errors and omissions. Only order confirmations and technical documentation by Eaton is binding. Photos and pictures also do not warrant a specific layout or functionality. Their use in whatever form is subject to prior approval by Eaton. The same applies to trademarks (especially Eaton, Moeller, and Cutler-Hammer). The Terms and Conditions of Eaton apply, as referenced on Eaton Internet pages and Eaton order confirmations.

Eaton is a registered trademark.

All other trademarks are property of their respective owners.

Follow us on social media to get the latest product and support information.

