

NAV-TV

INTERFACING THE FUTURE

3950 NW 120th Ave, Coral Springs, FL 33065 TEL 561-955-9770 FAX 561-955-9760

NNG-Honda 8

Navigation interface for select Honda vehicles

NTV-KIT582



Honda Odyssey Dash Removal



Remove side panel



Remove AC Vent Panel



Remove 3 screws



Take out Screen



**Remove 4 screws
Take out LCD Panel**

Get ready to place
1. video board
2. touch screen panel

Honda Pilot Dash Removal



Remove AC Vent



Remove 4 Screws



Remove top panel
(pulling out with tools)



Remove 4 screws
Take out LCD Panel



Get ready to place
1. video board
2. touch screen panel

Install Touch Screen Panel Board



Remove Front Bezel



Use pick tools to
remove LCD Casing



Remove Video Board screw
and 2 ribbon cable



unscrew factory video board
and get ready to take off
LCD panel



Place Touch Screen Panel
on in from the LCD Panel

Install Touch Screen Panel Board (II)



Install touch panel

Look at the provided Label to define front/back side



Restore LCD Panel



Restore 3 Ribbon cable connections



#1 Small Ribbon for LCD panel Power



#2 Video Ribbon

#3) Touch Screen Ribbon



Restore factory LCD Board
Get ready for install
daughter video board



Installation Guide

Navigation Honda 8"

Install Video Board



Place the provided 3 Studs into these location

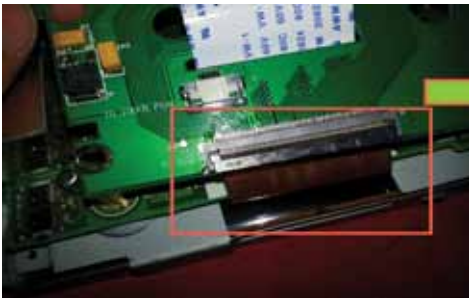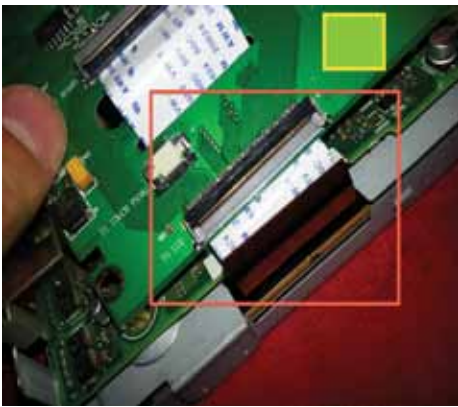

- 1) Place Y-Connection on the Ribbon Cable
 - Factory Brown Ribbon go to daughter Board
 - Daughter board ribbon go to factory board
 - 2) Place Touch Screen Ribbon into daughter board
- MAKE SURE SOCKET ARE ALIGNED and CLOSED**

Installation Guide

Navigation Honda 8"

Install Video Board II



Restore 3 factory screws into daughter board



Get the Panel casing



Peel off Metal Tape



Go thru video cable
from interface module to
the daughter board



Secure video connection

Installation Guide

Navigation Honda 8"

Install Video Board III



Close LCD panel casing,
get ready to install interface/GPS module

Remove Protection Plastic Bezel

Remove protection plastic by pick tools




*picture shown as odyssey, for pilot, remain the same procedure

Installation Guide

Navigation Honda 8"

Overall Wiring Connection Figure

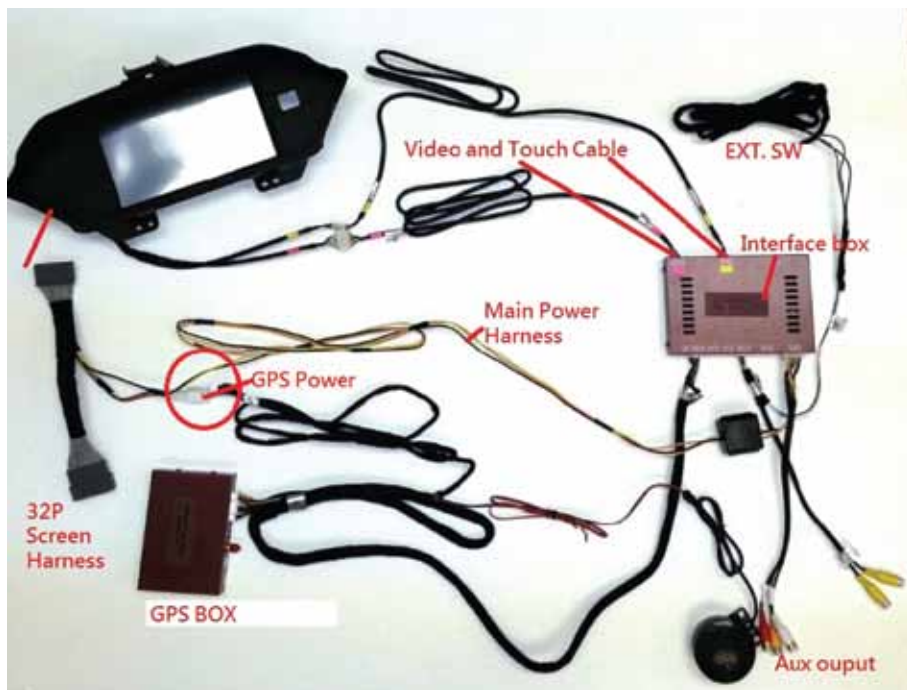

Main Harness:

32P Screen Harness = To Screen and Car Side

8P Power Connector = To GPS box Harness

Interface box:

LCD (PINK) = To Interface box

TP IN (Yellow) = To Interface box

12P Main Harness = To Screen and Car Side,

GPS Harness = Interface box NAVI_IN, GPS Box 20P

GPS Harness = GPS power to 12P Main Harness

External Switch = Manual Switch for Radio/GPS Mode

External Speaker and GPS Antenna

DIP SW SETTING



DIP SW Setting

1 ON --OEM CAMERA or No Camera

1 OFF- AFTER MARKET CAMERA

2-5 OFF

6 OFF

7 OFF

8 OFF

RGB ONLY



RGB ONLY

Connect Reverse Wire To connect OEM Camera

#1) DIP SW #1 ON

#2) Connect reverse wire

Honda Odyssey



Honda Odyssey with OEM camera

- 1) Under driver side fuse box
- 2) Left green connector
- 3) Brown wire (reverse wire)
- 4) Tab the brown wire into Reverse wire (orange)

Honda Pilot



Honda Pilot with OEM camera

- 1) At the passenger side open Kick panel and find blue connector.
- 2) Tab the orange wire into interface box Reverse wire (orange)

Please note that reverse wire might locate differently, above information is for reference only.

You may find reverse wire at other location and connect it to the interface box reverse wire (orange)

To connect Aftermarket Camera

- #1) DIP SW #1 OFF (reset power everytime change dip sw)
- #2) Connect reverse trigger to interface box orange reverse wire
- #3) Connect RCA Camera input to the interface box

WEAK /NO GPS SIGNAL?


Tips to Improve GPS Antenna Signal if vehicle equipped Metallized Windshield*

"GPS MONITOR Tools"



Exit IGO MAP by press SHUT DOWN BUTTON



Console> SETUP


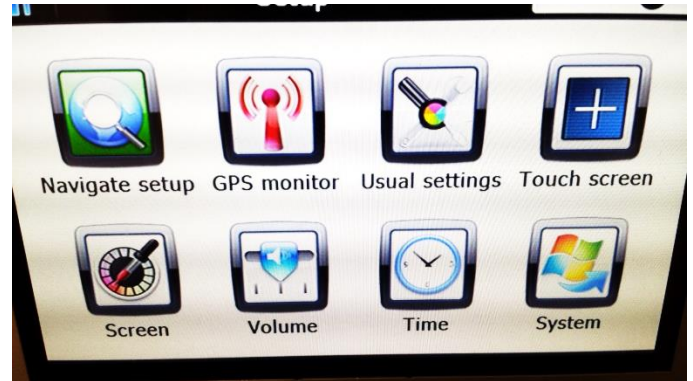


GPS MONITOR

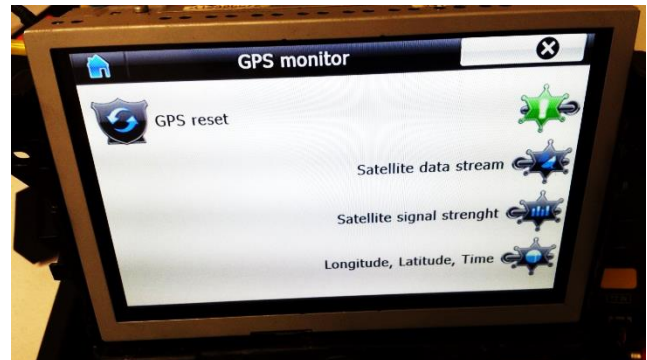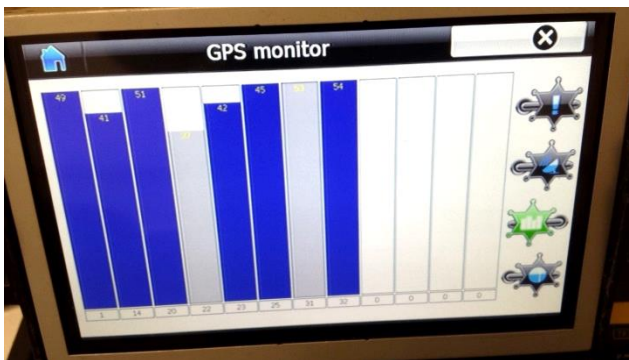

Locate the Antenna with minimum 5 bars in dark blue or Gray bar


(Always suggest mounting the GPS antenna on the roof)

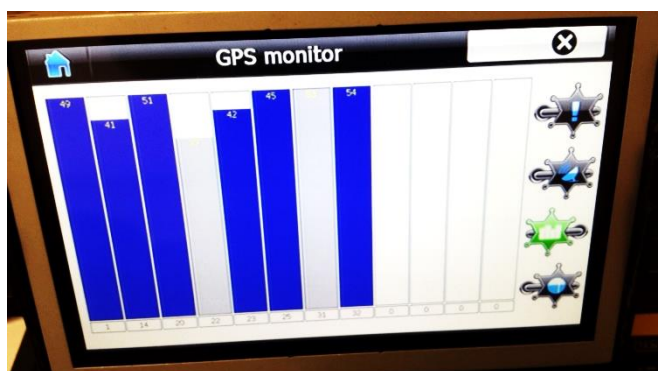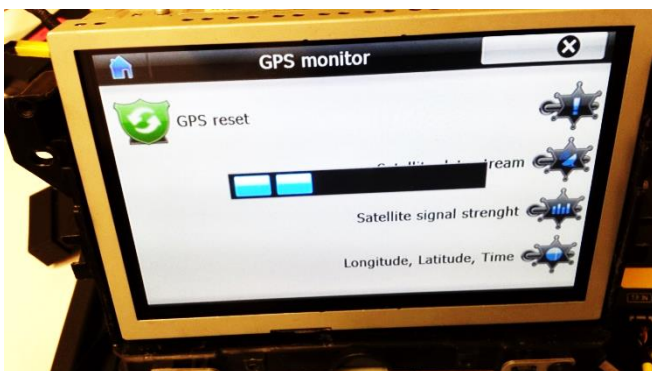


Press "!" icon to reset GPS signal and change the Antenna position

PROPER GPS ANTENNA POSITION

if vehicle equipped *Metallized Windshield

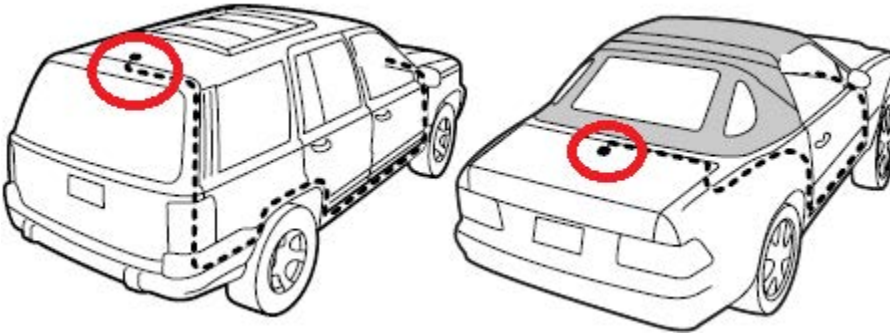

SUV/Coupe

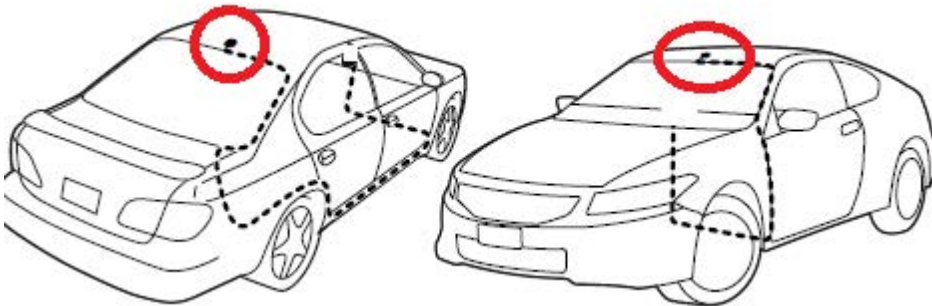

Sedan



TRUCK (Shown as Tundra)

Alternatively, installer might choose to mount Antenna inside the headliner or inside vehicle using GPS monitor tools (see instruction). However, stay away from the windshield.

* Windshields with metal particles can interfere with radio waves, dash-mount satellite radio receivers, and GPS receivers may be affected external transmitters and receivers may be required.



IGO PRIMO MAP PATH SETTING

1. Press Setup -> Navigate Setup
2. Press on the Folder Icon
3. Select the following path in Storage Card -> cyb_navi.exe
4. Press HOME button on the top left corner and press
NAVIGATION
5. System should be able to run into "IGO PRIMO"