



5087

三模键盘用户手册

Multi-modes Mechanical Keyboard
User Manual


快速开始指南 ►
Quick Start Guide

感谢您购买及使用本产品



为了给您带来更好的使用体验，在使用产品前请仔细阅读本说明书，并请妥善保管，以便日后参观。

包装内容

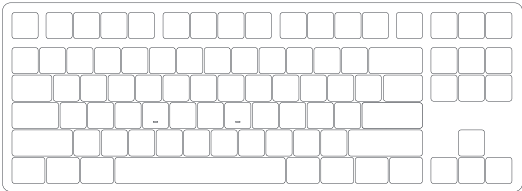

系统需求

Windows®XP / Vista / 7 / 8 / 10或更高版本


安装步骤

将键盘USB连接线插入电脑的USB接口即可开始使用。

独立指示灯

状态	指示灯位置	回连	配对	连接成功
BT1	按键E灯	蓝色慢闪	蓝色快闪	蓝灯常亮2s熄灭
BT2	按键R灯	蓝色慢闪	蓝色快闪	蓝灯常亮2s熄灭
BT3	按键T灯	蓝色慢闪	蓝色快闪	蓝灯常亮2s熄灭
2.4G	按键Y灯	绿色慢闪	绿色快闪	绿灯常亮2s熄灭
有线	按键U灯	无	无	红灯常亮2s熄灭
状态	指示灯位置	指示方式		
低电	独立指示灯2	白灯慢闪		
充电	独立指示灯2	白灯常亮		
充满	独立指示灯2	灯灭		
Caps	独立指示灯1	白光常亮		
锁Win	独立指示灯3	白光常亮		

5087B V2 组合键功能

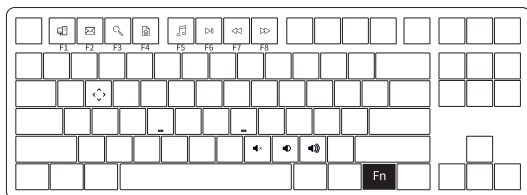


Fn+	F1		我的电脑
	F2		电子邮件
	F3	=	Windows搜索
	F4		浏览器主页
	F5		多媒体播放器

Fn+	F6		播放 / 暂停
	F7		上一首
	F8		下一首
	<		音量减小
	>		音量增加

Fn+	M		静音
	W	=	将WASD与 ↑ ↓ ← → 键对调

5087B V2 系统功能 (Windows)

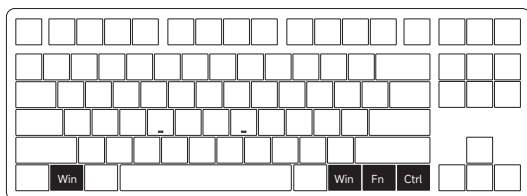


锁Win键
Fn + 左Win

恢复出厂设置
长按 左Win + 右Win 5秒

切换菜单键
长按 Fn + 右Ctrl 3秒

5087B V2 系统功能 (Mac)

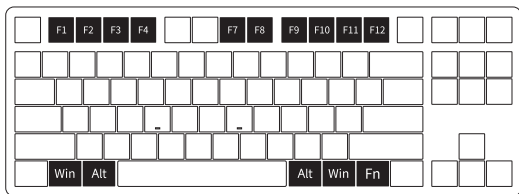

F1 降低显示屏亮度

F2 增加显示屏亮度

F3 开放任务控制

F4 呼出Siri

F7 上一曲

F8 播放/暂停

F9 下一曲

F10 静音

F11 音量-

F12 音量+

左Win Option


左Alt Command

右Alt Command

右Win Option

Fn + (F1~12) F1 ~ F12

5087B V2 灯光调节

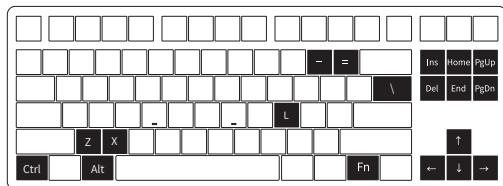

Fn+- 灯光速度变慢

Fn+= 灯光速度变快

Fn+↑ 灯光变亮

Fn+↓ 灯光变暗

Fn+← 灯光方向向左

Fn+→ 灯光方向向右

Fn+L 灯光关闭/开启

Fn+Z 侧边灯光亮度切换, 5档, 循环

Fn+X 侧边灯光速度切换, 5档, 循环

Fn+Ins 常亮(默认)、流星、呼吸

Fn+Home 涟漪、如影随形、川流不息

Fn+PgUp 繁星点点、霓虹、光波、层出不穷

Fn+Del 彩泉涌动、峰回路转、百花争艳

Fn+End 极光、正弦波、雨滴


Fn+PgDn 斜风细雨、踏雪无痕、聚合、一石二鸟

Fn+\ 切换背光致7种单色+RGB循环

Fn+左Ctrl 侧边灯光模式切换, 包括关闭 共6种

Fn+左Alt 在侧边灯光模式, 调节灯光颜色致7色单色+RGB循环

5087B V2 连接使用指南

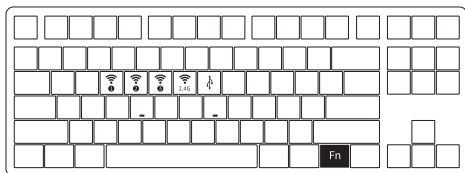

Fn+	E	=	蓝牙设备1	短按回连蓝灯慢闪; 长按配对蓝灯快闪
	R		蓝牙设备2	
	T		蓝牙设备3	短按回连绿灯慢闪; 完成匹配后恢复灯效
	Y		2.4G无线设备	
	U		有线模式	

 背面开关示意
左: Windows(内置电源开)
中: 默认Windows(内置电源关)
右: Mac (内置电源开)

蓝牙配对

键盘开机后,按下Fn+E/R/T进入蓝牙模式,长按Fn+E/R/T组合键3S,键盘进入对码状态,蓝色指示灯快闪,连上后指示灯常亮2S,如果没有连上设备指示灯熄灭,键盘进入睡眠。配对成功后静置2分钟进入浅睡状态,进入浅睡状态起算15分钟后键盘进入深度睡眠模式。

2.4G配对

键盘开机后,按下Fn+Y进入2.4G模式,再按下Fn+Y组合键3S进入配对模式后,插入接收器,绿色指示灯快闪,配对成功后退出对码,模式灯常亮2S,找不到配对设备30s后,退出对码模式灯熄灭,键盘进入睡眠。配对成功后静置2分钟进入浅睡状态,进入浅睡状态起算10分钟后键盘进入深度睡眠模式。

电量查询

在无线模式下,按Fn+空格组合键可检查电池电量。如果电池电量低于30%,数字1-2键将显示红灯。如果电池电量低于100%,数字1-9键将显示绿灯,电池电量充满数字1-0键显示绿灯。

1	2	3	4	5	6	7	8	9	0
低于30%	低于40%	低于50%	低于60%	低于70%	低于80%	低于90%	低于100%	充满	
亮红灯					亮绿灯				

按键/灯光自定义说明和调用说明

1. 键盘三种工作模式下均可连接驱动并进行灯光和按键自定义
2. 键盘三种工作模式下可搭配驱动实现音乐律动
3. 请在我司官网下载“Akko Cloud”驱动
4. 驱动下载地址www.akkogear.com

Akko保修和服务声明

1. Akko为中国大陆的客户提供一个保修。对于其他地区，请联系您的卖家（Akko分销商）以了解具体的保修政策。
2. 如果保修期到期，客户需要支付维修费用。如果用户喜欢自己修理键盘，Akko也会提供说明。用户应对自行修复过程中发生的任何损失承担全部责任。
3. 由于私自拆卸产品、使用不当和安装不当而导致的缺陷不在保修范围内。
4. 官方售后服务时间为每周一至周五上午10:00至下午18:00
节假日以国家法定节日休息为准。
5. 退货和保修政策在不同的平台上可能有所不同，并在购买时取决于具体的经销商。

公司：深圳银宸科技有限公司

地址：深圳市宝安区松岗街道碧头第一工业区朗碧路33号

电话：0755-23216420

网址：www.akkogear.com

产地：中国·深圳

Company: Shenzhen Yinchen Technology Co., Ltd

Address: 33 Langbi Rd, Bitou First Industrial Zone, Bao'an District, Shenzhen, China



WARNING:
Water and Beverages can't be
poured into the Keyboard.




中国制造/Made in China

注意 事项

人为损坏不局限于键盘进水、高处坠落、过度用力拉扯线材等，键盘为电子产品
请按照电子产品保护方式爱惜使用。

To provide you with a better user experience, please read this manual carefully before using the product.

Packing List

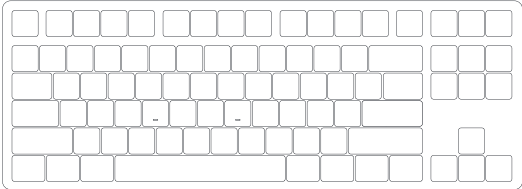

System Requirement

Windows®XP / Vista / 7 / 8 / 10 or higher version


Connectivity Method

Connect the keyboard to your computer by plugging in the USB cable into an available USB port to start using it.

LED Indicators

State	Indicator	Re-Connecting	Pairing	Connected
Bluetooth device 1	LED for Key E	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then goes out
Bluetooth device 2	LED for Key R	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then goes out
Bluetooth device 3	LED for Key T	Blue light blinks slowly	Blue light blinks fast	Blue light stays on for 2 seconds and then goes out
2.4G wireless device	LED for Key Y	Green light blinks slowly	Green light blinks fast	Green light stays on for 2 seconds and then goes out
Wired mode	LED for Key U	N/A	N/A	Red light stays on for 2 seconds and then goes out
Status	Indicator	Indicating mode		
Low Battery	Side LED Indicator 2	White light blinks slowly		
Charge	Side LED Indicator 2	Steady white		
Fully Charged	Side LED Indicator 2	LED OFF		
Caps	Side LED Indicator 1	Steady white		
Lock Win	Side LED Indicator 3	Steady white		

5087B V2 Plus HotKeys

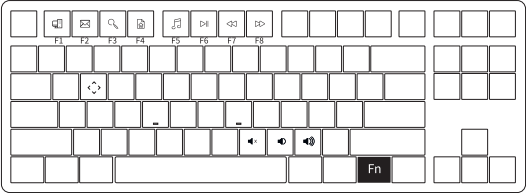


Fn+	F1	=	File Explorer
	F2		E-mail
	F3		Windows Search
	F4		Browser Homepage
	F5		Media

Fn+	F6	=	Pause/Playback
	F7		Previous Song
	F8		Next Song
	<		Decrease Volume
	>		Increase Volume

Fn+	M	=	Mute
	w		Swap WASD with ↑ ↓ ← →

5087B V2 System Commands (Windows)

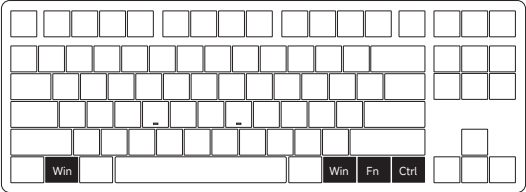


Lock Windows Key
Press Fn and Left Win Key

Restore Factory Settings
Hold down Left Win and press Right Win Key for 5s


Revert Ctrl into Menu Key
Hold down Fn and press right Ctrl for 3s

5087B V2 System Commands (Mac)

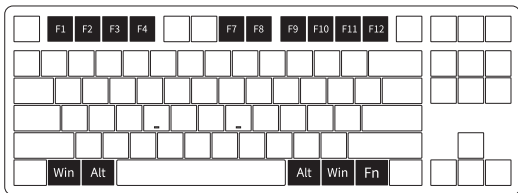


F1	Decrease display brightness	F7	Skip back (Audio)	F11	Decrease Volume
F2	Increase display brightness	F8	Pause/Play (Audio)	F12	Increase Volume
F3	Open mission control	F9	Skip forward (Audio)	Left Win	Option
F4	Activate Siri	F10	Mute	Left Alt	Command
Right Alt	Command	Fn + (F1~12) F1 ~ F12			
Right Win	Option				

5087B V2 Backlight Settings

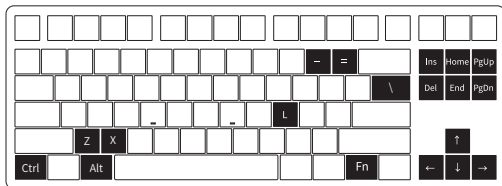

Fn+-	Slower Animation	Fn+Ins	Effect 1、Effect 2、Effect 3
Fn+=	Faster Animation	Fn+Home	Effect 4、Effect 5、Effect 6
Fn+↑	Bright	Fn+PgUp	Effect 7、Effect 8、Effect 9、Effect 10
Fn+↓	Dim	Fn+Del	Effect 11、Effect 12、Effect 13
Fn+←	Set animation direction to left	Fn+End	Effect 14、Effect 15、Effect 16
Fn+→	Set animation direction to right	Fn+PgDn	Effect 17、Effect 18、Effect 19、Effect 20
Fn+L	Light Off/On	Fn+\	This shortcut allows you to set the backlight color to 7 single color with RGB loop effect
Fn+Z	Side light brightness cyclically adjustable in 5 levels	Fn+Left Ctrl	Side light brightness 6-level cyclic switching (with OFF option)
Fn+X	Side light animation speed cyclically adjustable in 5 levels	Fn+Left Alt	In side light mode, adjust the light color to 7-color monochrome+RGB loop

5087B V2 Connection Guide

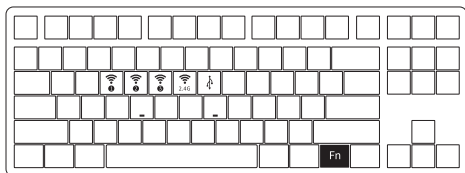

Fn+	E	Bluetooth device 1
	R	Bluetooth Device 2
	T	Bluetooth Device 3
	Y	2.4G wireless device
	U	Wired mode

Short press to reconnect with blue light blinks slowly;
Long press to pair with blue light blinks quickly.

Short press to reconnect with green light blinks slowly;
Restore lighting effects after pairing completes.



Back Switch Indicator

Left: Windows(built-in power on)

Medium: Default Windows (built-in power off)

Right: Mac (built-in power on)

Bluetooth Pairing

After turning on the keyboard, press Fn+E/R/T to enter Bluetooth mode. Press and hold the Fn+E/R/T combination key for 3 seconds to put the keyboard in pairing mode, with the blue indicator light flashing quickly.

After successful pairing, the keyboard will enter a low-power sleep mode after being idle for 2 minutes.

It will enter the hibernate state 15 minutes after entering the low-power sleep mode.

2.4G Pairing

After turning on the keyboard, press Fn+Y to enter the 2.4G mode. Then press Fn+Y for 3 seconds to enter the pairing mode. Insert the receiver, and the green indicator light will blink quickly. After a successful pairing, the mode light will stay on for 2 seconds. If no paired device is found after 30 seconds, the device will exit the pairing mode, and the mode light will turn off, putting the keyboard into sleep mode.

After successful pairing, the keyboard will enter a low-power sleep mode after being idle for 2 minutes. It will enter the hibernate state 10 minutes after entering the low-power sleep mode.

Battery Level Check

Press the Fn + Space combination keys to check the battery level in wireless mode. If the battery level is below 30%,

the LED for number keys 1-2 will show a red light. If it's between 30-100%, the LED for number keys 1-9 will show a green light.

And when the battery is fully charged, the LED for number keys 1-0 will show a green light.

1	2	3	4	5	6	7	8	9	0
Less than 30%	Less than 40%	Less than 50%	Less than 60%	Less than 70%	Less than 80%	Less than 90%	Less than 100%	Full charged	

Red light

Green light

Key/Lighting Effects Customization Instruction

1. The driver can be connected and lighting and key can be customized under the three working modes of the keyboard.
2. The three working modes of the keyboard can be matched to drive the music rhythm
3. Please download the Akko Cloud driver on our website
4. Users can download the driver via en.akkogear.com

AKKO Warranty and Service Statement

1. Akko provides One-Year warranty for customers in mainland China. For other regions, please contact your seller (Akko distributor) for specific warranty policy.
2. If the warranty window expires, customers need to pay for repairs. Akko will also provide instructions if users prefer to repair the keyboard by themselves. However, users shall take full responsibility for any loss happened during self-repair.
3. Defects resulting from disassembly of our product, improper usage and incorrect installation are not covered by warranty.
4. The return and warranty policy may vary in different platforms and are subject to the specific distributor at the time of purchase.

Company: Shenzhen Yinchen Technology Co., Ltd

Address: 33 Langbi Rd, Bitou Community 1st Industrial Zone, Bao'an District, Shenzhen, China

Tel: 0755-23216420

Website: www.akkogear.com

Origin: Shenzhen, China



WARNING:

Water and Beverages can't be poured into the Keyboard.



中国制造/Made in China

Precautions

Man-made damage is not limited to immersion, falling off, and pulling off the wires with excessive forces, etc.



www.akkogear.com

