

# Wireless Audio Adapter Transmitter & Receiver




Model:GT82

## Packing list

- 1.Wireless receiver&transmitter 1pcs
- 2.Type-C charging cable 1pcs
- 3.3.5mm audio cable 1pcs
- 4.User manual 1pcs

## Product Overview

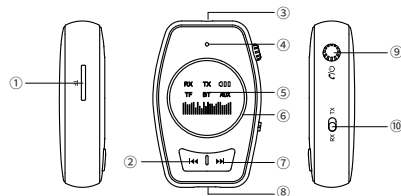

- ① TF Card-slot
- ② Volue Down/Previous Track
- ③ 3.5mm Audio
- ④ MIC
- ⑤ LED Display
- ⑥ Ambient Lighting
- ⑦ Volue Up/Next Track
- ⑧ USB-C Power Supply
- ⑨ Multi-function button
- ⑩ Mode switch

## Operating Instruction

### Charge the device:

Please fully charge the product before first use.Plug the provided USB C charging cable into the charging port, then connect the other end to a 5V rated USB adapter (your phone charger or similar should work) or PC USB port.

A flashing Battery Icon on the display that charging is in progress; and stop flashing when fully charged.

### Get it ready for playing:

#### TX (Transmitter mode)

- 1.Connect the adapter to the computer, TV or other device you need to use with the audio cable,Turn the switch on the side to TX
- 2.Power on,when display "TX" and flash continuously, and the adapter is in transmitting mode at this time.
- 3.Turn on your Wireless headphones or Wireless speakers to make sure they are in Wireless pairing mode. Wait for the adapter to automatically pair with the Wireless headset or Wireless speaker. After successful pairing, the "TX" display stops flashing and stays on, and then you can play music on your computer or TV, and the sound will be transmitted to the Wireless headset or Wireless speaker.

Button	Function	Operation
TX RX	TX mode	toggle up
	Power on/Power off	Press and hold for 3s
	Play/Pause	Short press once
	Connect next device	Quickly press twice
	Volume down	Press and hold for 2s
	Volume up	Press and hold for 2s

### Notice

if pairing fails, please confirm that the device to be paired is not occupied by other devices, and you can try pressing it a few more times. If it fails multiple times, please restart the adapter and Wireless headset or Wireless speaker and repeat the above steps.

#### RX(Receiver mode)

- 1.Connect the adapter to the speaker with an audio cable,Turn the switch on the side to RX
- 2.power on, The display will show "RX" and flash. At this time, the adapter is in receiving mode.
- 3.Turn on Wireless, search for "GT82" and connect. After successful pairing, "RX" on the display stops flashing and stays on,and then you can play music .

Button	Function	Operation
TX RX	RX mode	toggle down
	Power on/Power off	Press and hold for 3s
	Play/Pause	Short press once
	Take a call	Short press once
	End a call	Press once
	Reject a call	Press and hold for 2s
	Recall last incoming/outgoing call	Quickly press twice
	Volume down	Press and hold for 2s
	Previous track	Short press once
	Volume up	Press and hold for 2s
	Next track	Short press once

### Note:

If the Wireless connection fails, follow these steps:  
Make sure that the adapter and mobile phone are not connected to other Wireless devices; if it fails multiple times, please restart the adapter.

### Play music from TF card drive

Plug TF card drive into the TF card solt on the side,The screen shows TF,adapter will start playing automatically.

	Power on/Power off	Press and hold for 3s
	Play/Pause	Short press once
	Volume down	Press and hold for 2s
	Previous track	Short press once
	Volume up	Press and hold for 2s
	Next track	Short press once

### Switch playback mode

In RX receiving mode: Quickly press three the " " button to switch between TF card/Wireless modes.

In TX transmitting mode:Quickly press three the " " button to switch between TF card/AUX modes.

### Battery Level and charging

- 1.Battery level: It will show status on the screen
- 2.low battery prompt: the battery icon flashes, indicating that the battery power is less than 10%,please charge in time.

### Automatic shutdown and forced restart

The adapter will automatically shut down after 5 minutes if there is no Wireless connection or other playback operations.

### Specifications

Wireless Protocol: AVRCp, A2DP, HFP  
Output: 3.5mm Audio  
Charging Port: USB-C  
Input voltage/current:DC5V/500Ma  
Support TF card capacity: ≤64G  
Support TF card format: MP3,FLAC,WMA,WAV,APE  
Frequency Range:2.402GHz-2.480GHz  
Frequency Response:10Hz-20kHz  
SNR:>90dB  
Codecs:SBC  
Battery: Lithium Polymer Battery  
Battery Capacity: 300mAh 3.7V(1.11Wh)  
Charging Limited Voltage:5.25V  
Charging Time: About 1 Hours  
Runtime: TX Mode:About 6 Hours  
RX Mode:About 7 Hours  
Transmission Distance: 10m/32ft (No Blocking)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

**Note:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

#### FCC Radiation Exposure statement

The device has been evaluatec to meel general RF exposure requirement. The device can be used in portable exposure condition without restriction.