



DOMUS LINE
L I G H T S T Y L E

EN



DIY LED PROFILES



DIY LED PROFILES

The DIY LED profile collection for custom, professional and flexible lighting solution

Light you build, combine and customize. The DIY LED PROFILES collection by Domus Line is designed to offer carpenters, installers, and designers a technical yet creative solution: modular profile housings, easy to cut and assemble, for creating professional LED fixtures perfectly integrated into any interior design project.

Each model is designed to be freely configured—from the choice of profile to the finish, from the installation type to the compatible LED strip. An intuitive system that allows you to create linear lighting solutions tailored to any space, with millimetric precision and maximum design freedom.



DIY profiles are available in a wide range of sizes, materials and light emission directions—symmetric, asymmetric, diffused, or shielded—and support sensors and switches for power on/off, dimming, and color temperature control. All components are supplied as separate parts, ready to be assembled according to the project's specifications.

With a technical and essential design, Domus Line's DIY LED profiles are ideal for kitchens, living rooms, wardrobes and custom-made furniture. More than just lighting accessories, they become real design tools: flexible, reliable, and ready to become whatever you need.



INDEX

| | |
|----------------|----|
| ANDY DIY | 20 |
| APEX 79 DIY | 26 |
| APEX 84 DIY | 28 |
| APEX 84 FL DIY | 30 |
| APEX DIY | 24 |
| APEX H7 DIY | 32 |
| BLADE DIY | 51 |
| BLADE-IN DIY | 54 |
| DEA DIY | 18 |
| DIVA DIY | 56 |
| FYNN DIY | 34 |
| GOCCIA DIY | 62 |
| ICY DIY | 64 |
| KISY DIY | 43 |
| KOBI DIY | 49 |
| LAB DIY | 60 |
| LEDYE DIY | 66 |
| MICY DIY | 36 |
| MISS DIY | 58 |
| NEXUS DIY | 6 |
| NUBO DIY | 45 |
| SUNUP DIY | 47 |
| THEA DIY | 38 |
| TUBY DIY | 15 |
| TWIG DIY | 68 |
| TWIG XA DIY | 72 |
| TWIG XO DIY | 74 |
| TYNN DIY | 40 |


1.
CHOOSE THE
INSTALLATION
TYPE

2.
CHOOSE THE
FINISH

3.
CHOOSE
THE CONTROL
SYSTEM

4.
COMPLETE
THE PROFILE


5.
CHOOSE THE
LIGHT
SOURCE

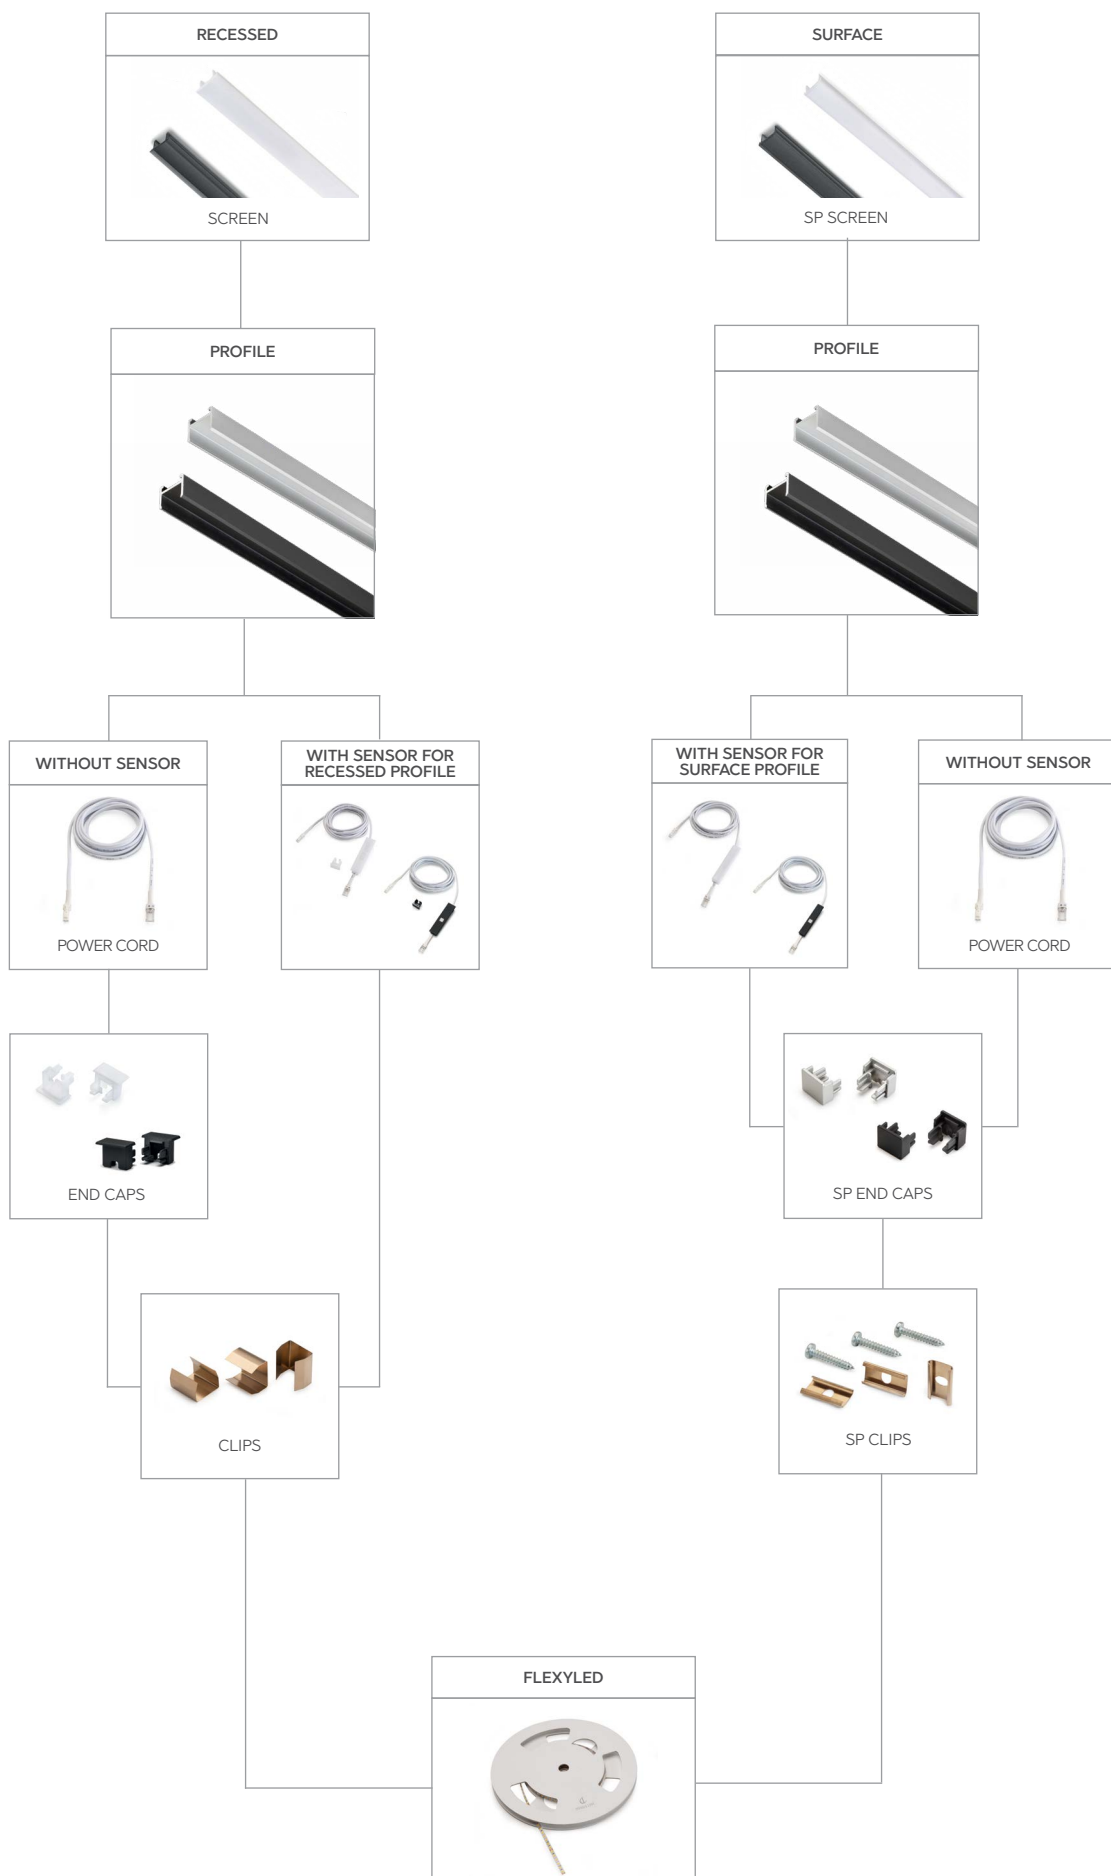

CONFIGURATION EXAMPLES


| | |
|---------------------|--|
| screen | NEXUS DIFFUSER SP 3000mm (F0005000033) |
| profile | NEXUS PROFILE 3000mm F32 (F0006000018) |
| sensor | SENSOR SP SD (F0126000020) |
| power cord | X |
| end caps | ENDS SP F46 (F0007000012) |
| fixing clips | CLIPS SP (F0007000010) |
| LED strip | FLEXYLED UHE6B ES (F0218000004) |

NEXUS in matt black finish for surface installation with SD sensor and FLEXYLED UHE6B ES.

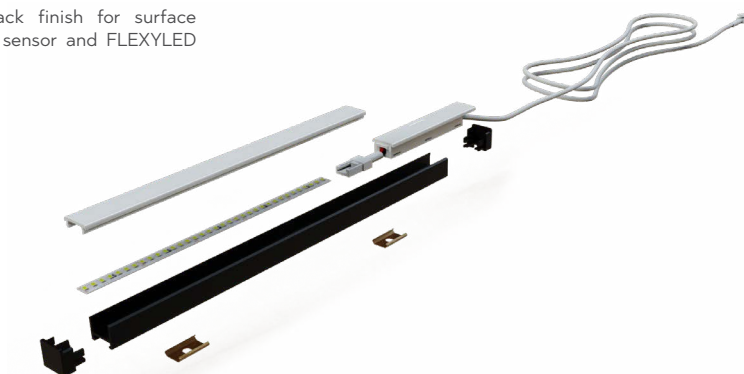


| | |
|---------------------|--|
| screen | NEXUS DIFFUSER SP 3000mm (F0005000033) |
| profile | NEXUS PROFILE 3000mm F05 (F0006000017) |
| sensor | X |
| power cord | POWER CORD (F0001000001) |
| end caps | END CAPS SP F10 (F0007000009) |
| fixing clips | CLIPS SP (F0007000010) |
| LED strip | FLEXYLED HE6B EVO (1586601B1/HE/1000) |

NEXUS in aluminium finish for surface installation with FLEXYLED HE6B EVO.

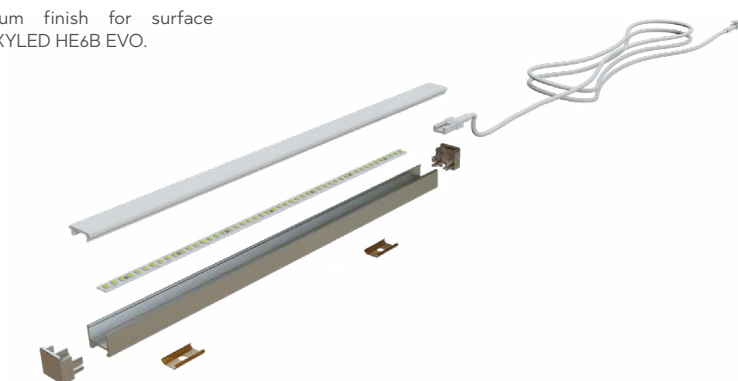


| | |
|---------------------|--|
| screen | NEXUS DIFFUSER 3000mm (F0005000032) |
| profile | NEXUS PROFILE 3000mm F05 (F0006000017) |
| sensor | SENSOR SD D-M (F0126000032) |
| power cord | X |
| end caps | X |
| fixing clips | CLIPS (F0007000011) |
| LED strip | FLEXYLED SHEP6B D-M (F0206000001) |

NEXUS for recessed installation with SD D-M sensor and FLEXYLED SHEP6B D-Motion.

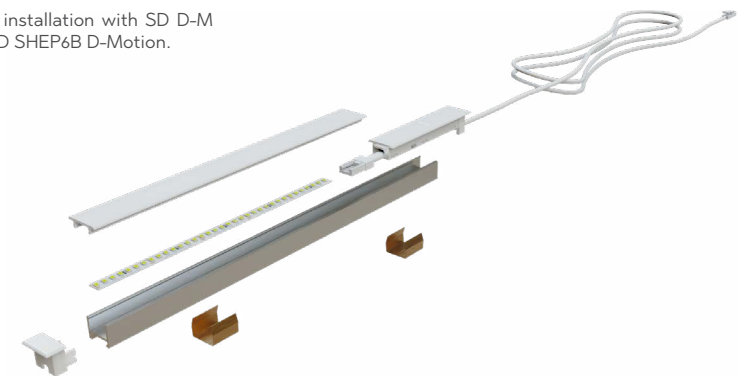

| | |
|---------------------|--|
| screen | NEXUS DIFFUSER 3000mm (F0005000032) |
| profile | NEXUS PROFILE 3000mm F05 (F0006000017) |
| sensor | SENSOR IFR (F0126000019) |
| power cord | X |
| end caps | X |
| fixing clips | CLIPS (F0007000011) |
| LED strip | FLEXYLED SHEP6B EVO (F0298000003) |

NEXUS for recessed installation with IFR motion sensor and FLEXYLED SHEP6B EVO.

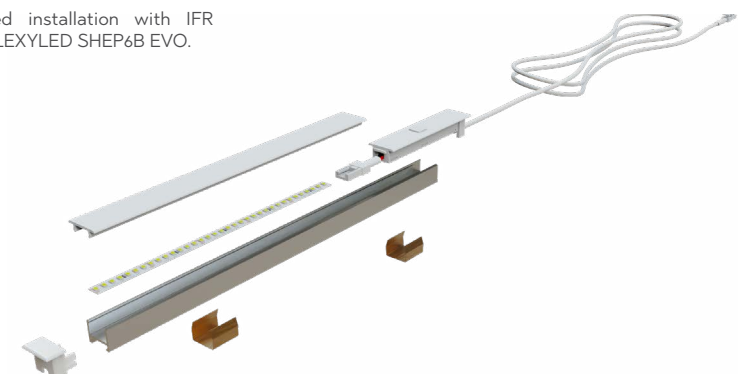




NEXUS DIY PROFILE

extruded aluminium

| Code | Lenght | Finish |
|-------------|--------|------------|
| F0006000042 | 2000mm | alluminium |
| F0006000017 | 3000mm | alluminium |
| F0006000043 | 2000mm | black matt |
| F0006000018 | 3000mm | black matt |



NEXUS DIY DIFFUSER

for recessed installation

| Code | Lenght | Finish |
|-------------|--------|--------|
| F0005000039 | 2000mm | white |
| F0005000032 | 3000mm | white |
| F0005000082 | 2000mm | black |
| F0005000080 | 3000mm | black |



NEXUS SP DIY DIFFUSER

for surface installation


| Code | Lenght | Finish |
|-------------|--------|--------|
| F0005000040 | 2000mm | white |
| F0005000033 | 3000mm | white |
| F0005000083 | 2000mm | black |
| F0005000079 | 3000mm | black |



NEXUS DIY ENDS

for recessed installation without sensor

| Code | Model | Finish |
|-------------|-------|--------|
| F0007000008 | NEXUS | white |
| F0007000037 | NEXUS | black |

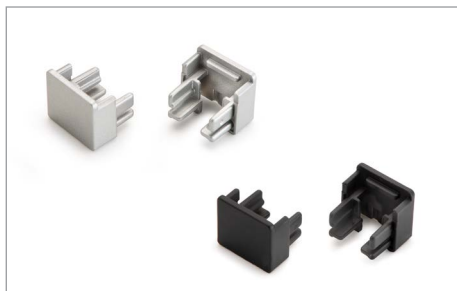

SP END CAPS

for surface installation

| Code | Finish |
|-------------|------------|
| F0007000009 | aluminium |
| F0007000012 | black matt |



CLIPS

for recessed installation

| Code | F0007000011 |
|------|-------------|
|------|-------------|



NEXUS SP DIY CLIPS

for surface installation

| Code | F0007000010 |
|------|-------------|
|------|-------------|



POWER CORD

with CH6 and Micro24 for configuration of NEXUS without sensor

| Code | Lenght |
|-------------|--------|
| F0001000001 | 2000mm |



INTERCONNECTION CABLE

with CH6 for continuous connection of FLEXYLED in the NEXUS collection


| Code | Lenght |
|-------------|--------|
| F0001000002 | 60mm |
| F0001000004 | 100mm |
| F0001000007 | 2000mm |



NEXUS SD

sensor-dimmer for recessed installation


| | |
|-------------------|----------------|
| Code | F0126000018 |
| Input | 24VDC |
| Output | 24VDC |
| Power | 72W |
| Wiring IN | 2000mm Micro24 |
| Wiring OUT | 30mm CH6 |



NEXUS SD D-M

sensor-dimmer D-M for recessed installation

| | |
|-------------------|----------------|
| Code | F0126000032 |
| Input | 24VDC |
| Output | 24VDC |
| Power | 72W |
| Wiring IN | 2000mm Micro24 |
| Wiring OUT | 30mm CH6 |



NEXUS SD (sensor-dimmer) allows switching on, switching off, and adjusting the brightness (10-100%) of the individual profile. NEXUS SD D-M (sensor-dimmer D-Motion) allows switching on, switching off, adjusting the brightness (5-100%) and selecting of colour temperature in WHC (White Changeable) mode.



NEXUS SD and NEXUS SD D-M enable instant switching on of the device, while switching off occurs in soft-off mode with a fade of up to 1". Both sensor dimmers feature an indicator light that turns on when the device is off, and can be deactivated with six quick taps. When on, the indicator light is set to 40% of its maximum brightness. This level automatically increases up to 60% in bright ambient light conditions, or decreases down to 10% in low or no ambient light. The indicator light has a fixed intermediate color temperature that cannot be adjusted. The sensors include an automatic switch-off function that activates after approximately 18 hours of continuous operation. For more details, refer to the instruction manual.

NEXUS SD | NEXUS SD D-M

sensor-dimmer switches




NEXUS SD and NEXUS SD D-M are sensor-dimmer switches designed for configuring the NEXUS profile for recessed installation. NEXUS SD allows switching on, switching off, and adjusting the brightness (10-100%) of the individual profile. NEXUS SD D-M allows switching on, switching off, adjusting the brightness (5-100%) and selecting of colour temperature in WHC (White Changeable) mode. The sensors are supplied with end caps that allow the profile to be installed flush in either blind-milling or through-milling, with a 2000mm power cable featuring a Micro24 male connector, and a 30mm cable with CH6 connector for connection to the FLEXYLED.



NEXUS IFR

PIR motion sensor for recessed installation

| | | |
|------------|----------------|----------------|
| Code | F0126000019 | F0126000089 |
| Finish | white | black |
| Input | 24VDC | 24VDC |
| Output | 24VDC | 24VDC |
| Power | 72W | 72W |
| Wiring IN | 2000mm Micro24 | 2000mm Micro24 |
| Wiring OUT | 30mm CH6 | 30mm CH6 |



The PIR (Passive InfraRed) sensor automatically activates the instant-on and delayed-off (approximately 30 seconds) of the luminaire with the opening and closing of the door of the cabinet where it is installed, as well as with movement within the detection range. For more details, refer to the instruction manual.

NEXUS IFR
motion sensors




NEXUS IFR is a motion sensor designed for configuring the NEXUS profile for recessed installation. NEXUS IFR automatically activates switching on (instant) and switching off (with a delay of approx. 30 seconds) of single-colour or dual-colour D-Motion light sources integrated in the profile by the opening and closing of the door of the cabinet in which it is installed, or by movement within the detection area. NEXUS IFR is supplied with end caps that allow the profile to be installed flush in either blind-milling or through-milling, with a 2000mm power cable featuring a Micro24 male connector, and a 30mm cable with CH6 connector for connection to the light source.



NEXUS SP SD

sensor-dimmer for surface installation


| | |
|-------------------|------------------------------|
| Code | F0126000020 |
| Input | 24VDC |
| Output | 24VDC |
| Power | max 72W |
| Wiring IN | 2000mm and Micro24 connector |
| Wiring OUT | 30mm and CH6 connector |



NEXUS SP SD D-M

sensor-dimmer D-M for surface installation

| | |
|-------------------|------------------------------|
| Code | F0126000033 |
| Input | 24VDC |
| Output | 24VDC |
| Power | max 72W |
| Wiring IN | 2000mm and Micro24 connector |
| Wiring OUT | 30mm and CH6 connector |



NEXUS SP SD (sensor-dimmer) allows switching on, switching off, and adjusting the brightness (10-100%) of the individual profile. NEXUS SP SD D-M (sensor-dimmer D-Motion) allows switching on, switching off, adjusting the brightness (5-100%) and selecting of colour temperature in WHC (White Changeable) mode.



NEXUS SP SD and NEXUS SP SD D-M enable instant switching on of the device, while switching off occurs in soft-off mode with a fade of up to 1". Both sensor dimmers feature an indicator light that turns on when the device is off, and can be deactivated with six quick taps. When on, the indicator light is set to 40% of its maximum brightness. This level automatically increases up to 60% in bright ambient light conditions, or decreases down to 10% in low or no ambient light. The indicator light has a fixed intermediate color temperature that cannot be adjusted. The sensors include an automatic switch-off function that activates after approximately 18 hours of continuous operation. For more details, refer to the instruction manual.

NEXUS SP SD | NEXUS SP SD D-M



sensor-dimmer switches


NEXUS SP SD and NEXUS SP SD D-M are sensor-dimmer switches designed for configuring the NEXUS profile for surface installation. NEXUS SP SD allows switching on, switching off, and adjusting the brightness (10-100%) of the individual profile. NEXUS SP SD D-M switching on, switching off, adjusting the brightness (5-100%) and selecting of colour temperature in WHC (White Changeable) mode. The sensors are supplied with end caps, 2000mm power cable featuring a Micro24 male connector, and a 30mm cable with CH6 connector for connection to the light source.



NEXU SP IFR

PIR motion sensor for surface installation

| | | |
|-------------------|----------------|----------------|
| Code | F0126000021 | F0126000090 |
| Finish | white | black |
| Input | 24VDC | 24VDC |
| Output | 24VDC | 24VDC |
| Power | 72W | 72W |
| Wiring IN | 2000mm Micro24 | 2000mm Micro24 |
| Wiring OUT | 30mm CH6 | 30mm CH6 |



The PIR (Passive InfraRed) sensor automatically activates the instant-on and delayed-off (approximately 30 seconds) of the luminaire with the opening and closing of the door of the cabinet where it is installed, as well as with movement within the detection range. For more details, refer to the instruction manual.

NEXUS SP IFR

motion sensors



NEXUS SP IFR is a motion sensor designed for configuring the NEXUS profile for surface installation. NEXUS SP IFR automatically activates switching on (instant) and switching off (with a delay of approx. 30 seconds) of single-colour or dual-colour D-Motion light sources integrated in the profile by the opening and closing of the door of the cabinet in which it is installed, or by movement within the detection area. NEXUS SP IFR is supplied with end caps, 2000mm power cable featuring a Micro24 male connector, and a 30mm cable with CH6 connector for connection to the light source.

NEXUS DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------------|------------|--------|-----------|----------------|----------------|------------------|--------|------|------|-------|-----|
| F0029000002 | HE6B PRO | 10m | 120 LED/m | 50mm (6 LED) | 9,6W/m @24VDC | super warm white | 2700 K | 1020 | 106 | Ra 80 | F |
| F0029000001 | HE6B PRO | 10m | 120 LED/m | 50mm (6 LED) | 9,6W/m @24VDC | warm white | 3000 K | 1020 | 106 | Ra 80 | F |
| F0029000003 | HE6B PRO | 10m | 120 LED/m | 50mm (6 LED) | 9,6W/m @24VDC | natural white | 4000 K | 1020 | 106 | Ra 80 | F |
| 1590701B1/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | super warm white | 2700 K | 1420 | 99 | Ra 80 | F |
| 1590701B/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | warm white | 3000 K | 1420 | 99 | Ra 80 | F |
| 1590701N/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | natural white | 4000 K | 1420 | 99 | Ra 80 | F |
| F0298000001 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | super warm white | 2700 K | 1040 | 186 | Ra 85 | C |
| F0298000002 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | warm white | 3000 K | 1040 | 186 | Ra 85 | C |
| F0298000003 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | natural white | 4000 K | 1100 | 196 | Ra 85 | B |
| 1394101B1/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | super warm white | 2700 K | 910 | 91 | Ra 90 | G |
| 1394101B/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | warm white | 3100 K | 940 | 94 | Ra 90 | F |
| 1394101N/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | natural white | 4200 K | 980 | 98 | Ra 90 | F |
| F0218000003 | UHE6B ES | 20m | 280 LED/m | 25mm (7 LED) | 5,8W/m @24VDC | super warm white | 2700 K | 640 | 110 | Ra 93 | F |
| F0218000002 | UHE6B ES | 20m | 280 LED/m | 25mm (7 LED) | 5,8W/m @24VDC | warm white | 3000 K | 640 | 110 | Ra 93 | E |
| F0218000004 | UHE6B ES | 20m | 280 LED/m | 25mm (7 LED) | 5,8W/m @24VDC | natural white | 4000 K | 700 | 121 | Ra 93 | E |

FLEXYLED D-M

dual colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------|------------|--------|---------------|------------------|--------------|----------------|-------------|------|------|-------|-----|
| 1552701/2000 | SHE6B D-M | 20m | 168+168 LED/m | 41,7mm (7+7 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 780 | 78 | Ra 90 | G |
| F0206000001 | SHEP6B D-M | 20m | 204+204 LED/m | 25mm (7 LED) | 10W/m @24VDC | white D-Motion | 3000-4000 K | 780 | 78 | Ra 90 | G |

FLEXYLED D-MWA

dual colour wave



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|-------------|------------|--------|----------------|----------------|---------------|---------------------|-------------|------|------|-------|-----|
| F0091000001 | HE6B D-MWA | 10m | 50mm (6+6 LED) | 42mm (7+7 LED) | 9,6W/m @24VDC | white D-Motion Wave | 2700-4000 K | 1054 | 110 | Ra 81 | F |



FLEXYLED D-MWA is not compatible with the CH6 connection system and can therefore be integrated into NEXUS DIY profiles only if equipped with a pre-wired light source (for example, FLEXYLED HE D-MWA PW). This light source must be connected to a D-MWA (D-Motion Wave) control system by Domus Line.




<https://www.domusline.com/warning-dyi-profiles/>



TUBY DIY PROFILE

extruded aluminium

| Code | Lenght | Finish |
|-------------|--------|------------|
| 4144605/200 | 2000mm | aluminium |
| 4144605/300 | 3000mm | aluminium |
| 4144632/200 | 2000mm | black matt |
| 4144632/300 | 3000mm | black matt |
| 4144649/200 | 2000mm | champagne |
| 4144649/300 | 3000mm | champagne |



TUBY DIY DIFFUSER

extruded polycarbonate

| Code | Lenght | Finish |
|-------------|--------|--------|
| 3080401/200 | 2000mm | white |
| 3080401/300 | 3000mm | white |



TUBY DIY ENDS

| Code | Model | Finish |
|-----------|----------|------------|
| 4017610/S | TUBY L+R | aluminium |
| 4017603/S | TUBY L+R | black matt |
| 4017649/S | TUBY L+R | champagne |



TUBY DIY SUPPORTS

| Code | Modell | Finish |
|-----------|--------|--------|
| 4017703/S | TUBY | 3+3 |

TUBY DIY

surface-mounted profile


TUBY is a profile with symmetrical light projection, designed for surface installation, recommended for under-cabinet application adjacent to the wall or backsplash. The shape of the profile, with anti-glare shield, masks the focal point of the light source on the front side of the shelf. The SD (sensor-dimmer) and SD D-M (sensor-dimmer D-Motion) sensors are designed to be integrated into the profiles and allows switching on and off, dimming, and colour temperature selection. TUBY integrates a 6mm wide LED module with adhesive base.



TUBY SD DIY

sensor-dimmer to be integrated


| | |
|-------------------|----------------|
| Code | 1795701 |
| Input | 24VDC |
| Output | 24VDC |
| Power | 72W |
| Wiring IN | 2000mm Micro24 |
| Wiring OUT | 30mm CH6 |



TUBY SD D-M DIY

D-M sensor-dimmer to be integrated

| | |
|-------------------|----------------|
| Code | 1795801 |
| Input | 24VDC |
| Output | 24VDC |
| Power | 72W |
| Wiring IN | 2000mm Micro24 |
| Wiring OUT | 30mm CH6 |



TUBY SD (sensor-dimmer) allows switching on, switching off, and adjusting the brightness (10-100%) of the individual luminaire. TUBY SD D-M (sensor-dimmer D-Motion) switch allows switching on, switching off, adjusting the brightness (10-100%) and selecting of colour temperature in WHC (White Changeable) mode.



TUBY SD and TUBY SD D-M enable the luminaire to switch on instantly, while switch-off occurs in soft-off mode with a fade-out effect in a maximum of 1 second. Both sensor dimmers integrate a status indicator light that activates when the luminaire is off. This light can be deactivated by tapping the sensor six times in quick succession. When active, the indicator light is set at 40% of its maximum brightness. This level automatically increases up to 60% in bright ambient light conditions, or decreases to as low as 10% in low or no ambient light. The colour temperature of the indicator light is intermediate and cannot be adjusted. The sensors also feature an automatic switch-off function, which activates after approximately 18 hours of continuous operation. For more details, refer to the instruction manual.

TUBY SD DIY | TUBY SD D-M DIY

sensor-dimmer switches



TUBY SD and TUBY SD D-M are sensor-dimmer switches designed for integration in the TUBY profile. TUBY SD allows switching on/off and dimming (10–100%) of single-colour light sources. TUBY SD D-M allows switching on/off, dimming (10–100%), and colour temperature selection in WHC (White Changeable) mode for dual-colour D-Motion light sources. Both sensors are supplied with a 2000mm power cable with Micro24 male connector, and a 30mm cable with CH6 connector for connection to the light source.

TUBY DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------------|------------|--------|-----------|----------------|----------------|------------------|--------|------|------|-------|-----|
| 1590701B1/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | super warm white | 2700 K | 1420 | 99 | Ra 80 | F |
| 1590701B1/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | warm white | 3000 K | 1420 | 99 | Ra 80 | F |
| 1590701B1/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | natural white | 4000 K | 1420 | 99 | Ra 80 | F |
| F0298000001 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | super warm white | 2700 K | 1040 | 186 | Ra 85 | C |
| F0298000002 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | warm white | 3000 K | 1040 | 186 | Ra 85 | C |
| F0298000003 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | natural white | 4000 K | 1100 | 196 | Ra 85 | B |
| 1394101B1/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | super warm white | 2700 K | 910 | 91 | Ra 90 | G |
| 1394101B/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | warm white | 3100 K | 940 | 94 | Ra 90 | F |
| 1394101N/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | natural white | 4200 K | 980 | 98 | Ra 90 | F |

FLEXYLED D-M

dual colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------|---------------|--------|---------------|------------------|--------------|----------------|-------------|------|------|-------|-----|
| 1552701/2000 | SHE6B D-M | 20m | 168+168 LED/m | 41,7mm (7+7 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 780 | 78 | Ra 90 | G |
| F0218000007 | UHE6B CSP D-M | 20m | 304+304 LED/m | 26,3mm (8+8 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 968 | 97 | Ra 92 | F |

FLEXYLED D-MWA

dual colour wave



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|-------------|------------|--------|---------------|----------------|---------------|---------------------|-------------|------|------|-------|-----|
| F0091000001 | HE6B D-MWA | 10m | 120+120 LED/m | 50mm (6+6 LED) | 9,6W/m @24VDC | white D-Motion Wave | 2700-4000 K | 1054 | 110 | Ra 81 | F |



FLEXYLED D-MWA must be connected to a D-MWA (D-Motion Wave) control system by Domus Line.




<https://www.domusline.com/warning-dyi-profiles/>



DEA DIY DIFFUSER

extruded polycarbonate

| Code | Lenght | Finish |
|--------------|--------|--------|
| 3078501/2000 | 2000mm | white |
| 3078501/3000 | 3000mm | white |



DEA DIY SUPPORT

for light source


| Code | Lenght | Finish |
|--------------|--------|--------|
| 3078401/2000 | 2000mm | white |
| 3078401/3000 | 3000mm | white |



DEA ENDS

for blind-milling

| Code | Model | Finish |
|-------------|-------|--------|
| F0007000045 | DEA | white |

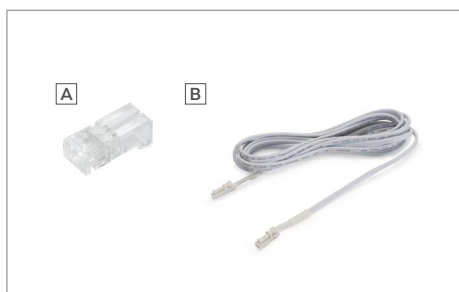

CC6

connection system

| Type | Code | Model | Lenght |
|--------|---------------|--------------|--------|
| Type A | 3076900 | CC6-M24F | |
| Type B | 1183701/200/S | Cavo M24 M/F | 2000mm |

DEA DIY

recessed micro profile

DEA is a micro profile with symmetrical light projection, designed for recessed installation in a blind-milling or through-milling with a width of 10mm and a depth of min. 7mm, recommended for use on shelves and on the side panels of cabinets. DEA combines a light source holder profile and a diffuser screen. The light source holder profile is made of co-extruded material with two lateral pressure microp protrusions, allowing for installation in a groove without the need for adhesives and for easy removal when needed. The white opalescent polycarbonate diffuser shield hides any irregularities in the edges (mouse-bites) and allows for installation flush against the surface without any constraints with the light source holder profile. DEA is configured with a (patented) CC6-M24F connector and a 2000mm Plug&Play power cable or with a 2000mm, and integrates CSP (Chip Scale Package) LED module with adhesive base, 6mm wide.

Patented

DEA DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|-------------|-----------|--------|-----------|----------------|--------------|---------------|--------|------|------|-------|-----|
| F0218000030 | UHE6B CSP | 20m | 304 LED/m | 26,3mm (8 LED) | 10W/m @24VDC | warm white | 3000 K | 800 | 80 | Ra 90 | F |
| F0218000031 | UHE6B CSP | 20m | 304 LED/m | 26,3mm (8 LED) | 10W/m @24VDC | natural white | 4000 K | 800 | 80 | Ra 90 | F |

FLEXYLED

dual colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|-------------|---------------|--------|---------------|------------------|--------------|----------------|-------------|------|------|-------|-----|
| F0218000007 | UHE6B CSP D-M | 20m | 304+304 LED/m | 26,3mm (8+8 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 968 | 97 | Ra 92 | F |




<https://www.domusline.com/warning-dyi-profiles/>




Example of ANDY installed under a kitchen island worktop with gola profile clips.



Example of ANDY installed under a wall-backed kitchen worktop with gola profile clips.

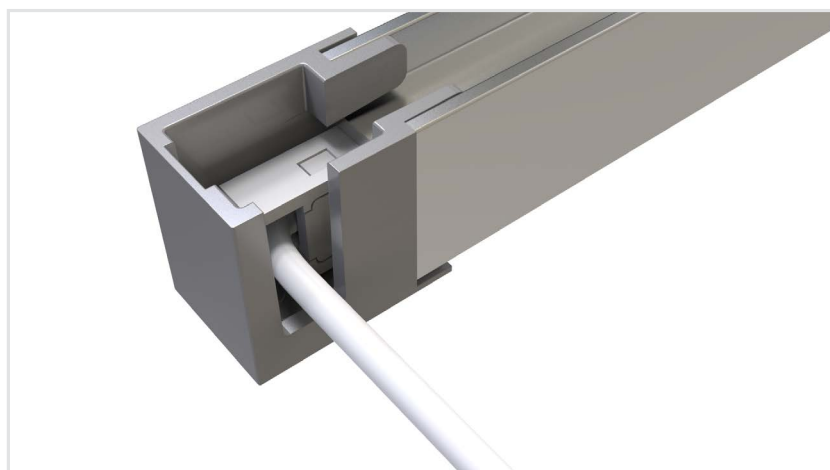


Detail of the end cap and power cable.

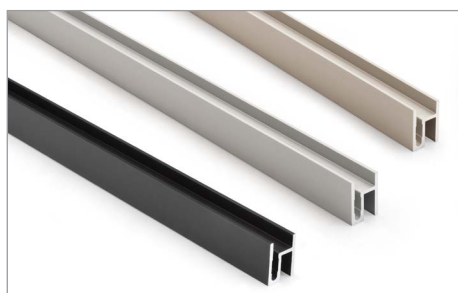

PROFILE

extruded aluminium


| Code | Lenght | Finish |
|-------------|--------|------------|
| F0006000109 | 2000mm | champagne |
| F0006000001 | 2000mm | alluminium |
| F0006000003 | 2000mm | black matt |
| F0006000110 | 3000mm | champagne |
| F0006000002 | 3000mm | alluminium |
| F0006000004 | 3000mm | black matt |



CORNER ELEMENT

for installation on kitchen islands



| Code | Finish |
|-------------|------------|
| F0007000042 | champagne |
| F0007000003 | alluminium |
| F0007000005 | black matt |



CORNER ELEMENT


for installations on kitchen corners

| Code | Finish |
|-------------|------------|
| F0007000043 | champagne |
| F0007000015 | alluminium |
| F0007000016 | black matt |

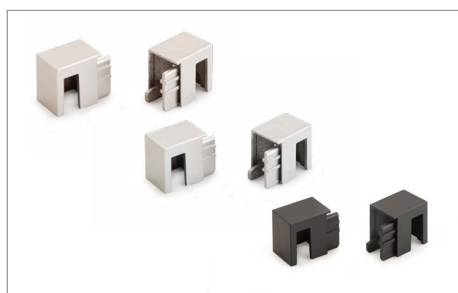

END CAPS

| Code | Model | Finish |
|-------------|--------------|------------|
| F0007000044 | left + right | champagne |
| F0007000017 | left + right | alluminium |
| F0007000018 | left + right | black matt |



CLIPS

for attachment to gola profiles*

| Code | F0007000004 |
|------|-------------|
|------|-------------|

* compatibility must be verified



SE H4-24 PRO

| Lenght | Watt | Volt |
|--------|------|-------|
| 1000mm | 10W | 24VDC |
| 2000mm | 20W | 24VDC |
| 3000mm | 30W | 24VDC |
| 6000mm | 60W | 24VDC |



SE H4-24 PRO integrates a FREE-CUT light source that allows the module to be cut to the desired length at any point of the profile.





The luminaire is protected from water splashes from all directions, preventing these from penetrating in damaging quantities (IP44).



The indicated CCT (Correlated Colour Temperatures) refer to the light sources integrated into the profile. The milky-effect diffusing silicone coating guarantees the colour temperatures in a range of 2900-3250K (WW) and 4000-4500K (NW).



The end caps of SE H4-24 PRO are the same size as the profile allowing the entire profile to be flush panel recessed into the groove. The power cord may exit axially or radially to the installation surface.



values referred to
SE H4-24 PRO 5000 K 1000mm

| | | |
|----------------------------|------------|---------------|
| Colour appearance | warm white | natural white |
| Colour temperature | 3400 K | 5000 K |
| Luminous flux | 800 lm/m | 1040 lm/m |
| Luminous efficiency | 80 lm/W | 104 lm/W |
| CRI | Ra 90 | Ra 90 |

SE H4-24 PRO

siliconic LED micro profile



SE H4-24 PRO is a micro profile with symmetrical light projection, designed for flush panel recessed installation in a through-milling with a width of 4mm and a depth of 8mm, recommended for use on any furnishing element. The luminaire is protected from water splashes from all directions, preventing these from penetrating in damaging quantities (IP44). Developed with milky-effect diffusing silicone coating technology, it integrates a single-colour FREE-CUT LED module with 180 LEDs/m that allows it to be cut to the desired length at any point on the profile. Upon request, SE H4-24 PRO is also available in custom lengths of up to 6000mm (IP20), complete with a 2000mm power cord that can exit radially or axially to the installation surface from end caps the same size as the profile. Power supply not included, to be ordered separately.





SE H4-24 PRO D-M

| Lenght | Watt | Volt |
|--------|------|-------|
| 1000mm | 10W | 24VDC |
| 2000mm | 20W | 24VDC |
| 3000mm | 30W | 24VDC |
| 6000mm | 60W | 24VDC |



SE H4-24 PRO D-M integrates a FREE-CUT light source that allows it to be cut to the desired length at any point on the profile.





The luminaire is protected from water splashes from all directions, preventing these from penetrating in damaging quantities (IP44).



The indicated CCT (Correlated Colour Temperature) refers to the light source integrated into the profile. The milky-effect diffusing silicone coating guarantees the colour temperatures in a range of 2500-2800K (WW) and 3800-4400K (NW).



The end caps of SE H4-24 PRO D-M are the same size as the profile allowing the entire profile to be flush panel recessed into the groove. The power cord may exit axially or radially to the installation surface.



values referred to
SE H4-24 PRO D-M 1000mm


| | |
|---------------------|-------------------|
| Colour appearance | white D-Motion |
| Colour temperature | 3000 - 5000 K |
| Luminous flux | 1100 lm/m |
| Luminous efficiency | 110 lm/W |
| CRI | Ra 90 |

SE H4-24 PRO D-M



siliconic dual colour LED micro profile

SE H4-24 PRO D-Motion is a micro profile with symmetrical light projection, designed for flush panel recessed installation in a through-milling with a width of 4mm and a depth of 8mm, recommended for use on any furnishing element. The luminaire is protected from water splashes from all directions, preventing these from penetrating in damaging quantities (IP44). Developed with milky-effect diffusing silicone coating technology, it integrates a dual-colour FREE-CUT LED module with 156+156 LEDs/m that allows it to be cut to the desired length at any point on the profile. Upon request, SE H4-24 PRO D-M is also available in custom lengths of up to 6000mm (IP20), complete with a 2000mm power cord that can exit radially or axially to the installation surface from end caps the same size as the profile. Power supply not included, to be ordered separately.






APEX DIY PROFILE

extruded polycarbonate

| Type | Code | Length | Finish |
|--------|-------------|--------|-----------|
| Type A | 3055301/200 | 2000mm | white |
| Type A | 3055301/300 | 3000mm | white |
| Type B | 3055360/200 | 2000mm | grey fumé |
| Type B | 3055360/300 | 3000mm | grey fumé |
| Type C | 3055364/200 | 2000mm | black |
| Type C | 3055364/300 | 3000mm | black |

*polymethylmethacrylate

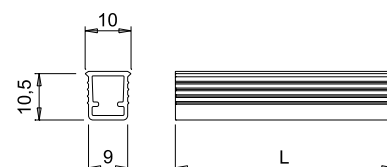

APEX ENDS

for blind-milling

| Type | Code | Model | Finish |
|--------|---------|-------|-----------|
| Type A | 4014501 | APEX | white |
| Type B | 4014560 | APEX | grey fumé |
| Type C | 4014546 | APEX | black |



APEX HI END CAPS

for through-milling

| Type | Code | Model | Finish |
|--------|---------|---------|-----------|
| Type A | 4016501 | APEX HI | white |
| Type B | 4016560 | APEX HI | grey fumé |
| Type C | 4016546 | APEX HI | black |

APEX DIY

recessed micro profile

APEX is a recessed micro profile with symmetrical light projection, designed for installation in a blind-milling or through-milling with a width of 9mm and a depth of 11mm. The shape profile, with two micro protrusions, hides any irregularities in the groove edges (mouse-bite); with a 0,7mm chamfer at 45° it is also possible to reduce the protrusion from the groove (from 0,8-1mm to 0,4 -0,6mm). APEX is available in a white opal finish, in multi-layer co-extrusion that ensures a grey fumé finish when the device is off and a “no dots” effect when the device is on, and black with Night&Day effect (black when the light is off and white when the light is on). APEX can incorporate 6mm wide “sliding” LED modules.

APEX DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------------|-----------|--------|-----------|----------------|----------------|------------------|--------|------|------|-------|-----|
| 1308301B1/SHE | SHE6 PRO | 10m | 180 LED/m | 33mm (6 LED) | 14,4W/m @24VDC | super warm white | 2700 K | 1420 | 99 | Ra 80 | F |
| 1308301B/SHE | SHE6 PRO | 10m | 180 LED/m | 33mm (6 LED) | 14.4W/m @24VDC | warm white | 3000 K | 1420 | 99 | Ra 80 | F |
| 1308301N/SHE | SHE6 PRO | 10m | 180 LED/m | 33mm (6 LED) | 14.4W/m @24VDC | natural white | 4000 K | 1420 | 99 | Ra 80 | F |
| F0298000014 | SHEP6 EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | super warm white | 2700 K | 1040 | 186 | Ra 85 | C |
| F0298000015 | SHEP6 EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | warm white | 3000 K | 1040 | 186 | Ra 85 | C |
| F0298000016 | SHEP6 EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | natural white | 4000 K | 1100 | 196 | Ra 85 | B |
| 1575501B1/UHE/2000 | UHE6 | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | super warm white | 2700 K | 910 | 91 | Ra 90 | G |
| 1575501B/UHE/2000 | UHE6 | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | warm white | 3100 K | 940 | 94 | Ra 90 | F |
| 1575501N/UHE/2000 | UHE6 | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | natural white | 4000 K | 980 | 98 | Ra 90 | F |

FLEXYLED D-M

dual colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|---------------|--------------|--------|---------------|----------------|---------------|----------------|-------------|------|------|-------|-----|
| 16556001/2000 | SHE6 D-M | 20m | 168+168 LED/m | 42mm (7+7 LED) | 10W/m @24VDC | D-Motion white | 2700-4000 K | 780 | 78 | Ra 90 | G |
| 1656001/2000 | UHE6 CSP D-M | 20m | 304+304 LED/m | 26mm (8+8 LED) | 9.4W/m @24VDC | D-Motion white | 2700-4000 K | 968 | 103 | Ra 92 | F |

FLEXYLED D-MWA

dual colour wave



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------|------------|--------|------------------|----------------|---------------|---------------------|-------------|------|------|-------|-----|
| 1655301/1000 | HE6 D-MWA | 10m | 50mm (6+6 LED) | 42mm (7+7 LED) | 9.6W/m @24VDC | D-Motion Wave white | 2700-4000 K | 1054 | 110 | Ra 81 | F |
| F0218000033 | UHE6 D-MWA | 10m | 50mm (12+12 LED) | 26mm (8+8 LED) | 9.6W/m @24VDC | D-Motion Wave white | 2700-4000 K | 1060 | 110 | Ra 80 | F |




<https://www.domusline.com/warning-dyi-profiles/>



APEX 79 DIY PROFILE

extruded polycarbonate


| Code | Length | Finish |
|-------------|--------|--------|
| 3073301/200 | 2000mm | white |
| 3073301/300 | 3000mm | white |



APEX 79 ENDS

for blind-milling

| Code | Length | Finish |
|---------|---------|--------|
| 4012801 | APEX 79 | bianco |

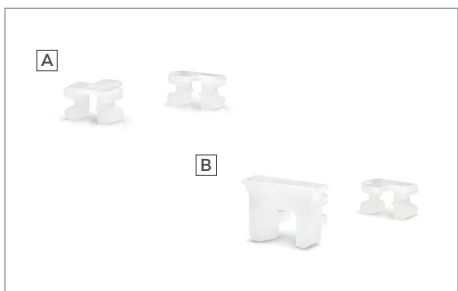

APEX 79 HI END CAPS | APEX 79 HI AX END CAPS

for through-milling

| Type | Code | Length | Finish |
|--------|---------|---------------|--------|
| Type A | 4016701 | APEX 79 HI | bianco |
| Type B | 4017301 | APEX 79 HI AX | bianco |



CLIPS

| Code | Length | Qty |
|---------|--------------|-----|
| 4012900 | APEX 79 (HI) | 3 |

APEX 79 DIY

recessed micro profile

APEX 79 is a recessed micro profile with symmetrical light projection, designed for recessed installation in a blind or trough-milling with a width of 9mm and a depth of 7mm, recommended for use under shelves. The shape of the profile, with two micro protrusions, hides any irregularities in the groove edges (mouse-bite). The fitting system, using side-pressure steel clips, allows the profile to be removed from the installation surface. APEX 79 integrates sliding LED modules without adhesive base, 6mm wide.

APEX 79 DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------------|-----------|--------|-----------|----------------|---------------|------------------|--------|------|------|-------|-----|
| 1575501B1/UHE/2000 | UHE6 | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | super warm white | 2700 K | 910 | 91 | Ra 90 | G |
| 1575501B/UHE/2000 | UHE6 | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | warm white | 3100 K | 940 | 94 | Ra 90 | F |
| 1575501N/UHE/2000 | UHE6 | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | natural white | 4200 K | 980 | 98 | Ra 90 | F |
| F0298000014 | SHEP6 EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | super warm white | 2700 K | 1040 | 186 | Ra 85 | C |
| F0298000015 | SHEP6 EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | warm white | 3000 K | 1040 | 186 | Ra 85 | C |
| F0298000016 | SHEP6 EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | natural white | 4000 K | 1100 | 196 | Ra 85 | B |

FLEXYLED D-M

dual colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------|--------------|--------|---------------|------------------|--------------|----------------|-------------|------|------|-------|-----|
| 1656001/2000 | UHE6 CSP D-M | 20m | 304+304 LED/m | 26,3mm (8+8 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 968 | 97 | Ra 92 | F |

FLEXYLED D-MWA

dual colour wave



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|-------------|------------|--------|---------------|----------------|---------------|---------------------|-------------|------|------|-------|-----|
| F0218000033 | UHE6 D-MWA | 10m | 240+240 LED/m | 25mm (6+6 LED) | 9,6W/m @24VDC | white D-Motion Wave | 2700-4000 K | 1100 | 115 | Ra 83 | F |

THEA D-MWA must be connected to a D-MWA (D-Motion Wave) control system by Domus Line.




<https://www.domusline.com/warning-dyi-profiles/>



APEX 84 DIY PROFILE

extruded polycarbonate

| Code | Length | Finish |
|-------------|--------|--------|
| 3078601/200 | 2000mm | white |
| 3078601/300 | 3000mm | white |



APEX 84 DIY

recessed micro profile

APEX 84 is a recessed micro profile with symmetrical light projection, designed for installation in a through-milling with a width of 4mm and a depth of 8mm, recommended for use on wardrobe sides. The shape of the profile, with two micro protrusions, hides any irregularities in the groove edges (mouse-bite). APEX 84 integrates a 6mm wide side-emitting single-colour LED module (SE) without adhesive base.

APEX 84 DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|----------------|---------|--------|-----------|----------------|--------------|------------------|--------|------|------|-------|-----|
| 1639301B1/2000 | SHE6 SE | 20m | 180 LED/m | 33,3mm (6 LED) | 10W/m @24VDC | super warm white | 2900 K | 1000 | 100 | Ra 83 | F |
| 1639301B/2000 | SHE6 SE | 20m | 180 LED/m | 33,3mm (6 LED) | 10W/m @24VDC | warm white | 3200 K | 1000 | 100 | Ra 80 | F |
| 1639301N/2000 | SHE6 SE | 20m | 180 LED/m | 33,3mm (6 LED) | 10W/m @24VDC | natural white | 4300 K | 1000 | 100 | Ra 80 | F |




<https://www.domusline.com/warning-dyi-profiles/>



APEX 84 FL DIY PROFILE

extruded polycarbonate

| Code | Length | Finish |
|--------------|--------|--------|
| 3079801/2000 | 2000mm | white |
| 3079801/3000 | 3000mm | white |



APEX 84 FL DIY

recessed micro profile

APEX 84 FL is a recessed micro profile with symmetrical light projection, designed for recessed installation in a through-milling with a width of 4mm and a depth of 8mm, recommended for application on wardrobe sides. APEX 84 FL integrates a 6mm wide side-emitting single-colour LED module (SE) without adhesive base.

APEX 84 FL DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|----------------|---------|--------|-----------|----------------|--------------|------------------|--------|------|------|-------|-----|
| 1639301B1/2000 | SHE6 SE | 20m | 180 LED/m | 33,3mm (6 LED) | 10W/m @24VDC | super warm white | 2900 K | 1000 | 100 | Ra 83 | F |
| 1639301B/2000 | SHE6 SE | 20m | 180 LED/m | 33,3mm (6 LED) | 10W/m @24VDC | warm white | 3200 K | 1000 | 100 | Ra 80 | F |
| 1639301N/2000 | SHE6 SE | 20m | 180 LED/m | 33,3mm (6 LED) | 10W/m @24VDC | natural white | 4300 K | 1000 | 100 | Ra 80 | F |



<https://www.domusline.com/warning-dyi-profiles/>



APEX H7 DIY PROFILE

extruded polycarbonate

| Code | Lenght | Finish |
|-------------|--------|--------|
| 3063701/200 | 2000mm | white |
| 3063701/300 | 3000mm | white |



APEX H7 HI END CAPS

for through-milling

| Code | Model | Finish |
|---------|------------|--------|
| 4010101 | APEX H7 HI | white |

APEX H7 DIY

recessed micro profile

APEX H7 HI is a recessed micro profile with symmetrical light projection, designed for recessed installation in a through-milling with a width of 9mm and a depth of 7mm, recommended for use under shelves. APEX 79 integrates sliding LED modules without adhesive base, 6mm wide.

APEX H7 DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------------|-----------|--------|-----------|----------------|---------------|------------------|--------|------|------|-------|-----|
| F0298000014 | SHEP6 EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | super warm white | 2700 K | 1040 | 186 | Ra 85 | C |
| F0298000015 | SHEP6 EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | warm white | 3000 K | 1040 | 186 | Ra 85 | C |
| F0298000016 | SHEP6 EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | natural white | 4000 K | 1100 | 196 | Ra 85 | B |
| 1575501B1/UHE/2000 | UHE6 | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | super warm white | 2700 K | 910 | 91 | Ra 90 | G |
| 1575501B/UHE/2000 | UHE6 | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | warm white | 3100 K | 940 | 94 | Ra 90 | F |
| 1575501N/UHE/2000 | UHE6 | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | natural white | 4000 K | 980 | 98 | Ra 90 | F |

FLEXYLED D-M

dual colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------|--------------|--------|---------------|------------------|---------------|----------------|-------------|------|------|-------|-----|
| 1656001/2000 | UHE6 CSP D-M | 20m | 304+304 LED/m | 26,3mm (8+8 LED) | 9,4W/m @24VDC | white D-Motion | 2700-4000 K | 968 | 103 | Ra 92 | F |




<https://www.domusline.com/warning-dyi-profiles/>



FYNN DIY PROFILE

extruded polycarbonate

| Code | Length | Finish |
|-------------|--------|--------|
| F0005000084 | 2000mm | black |
| F0005000028 | 3000mm | black |



FYNN DIY ENDS

for blind-milling

| Code | Model | Finish |
|-------------|----------|--------|
| F0007000007 | FYNN L+R | black |



FYNN HI DIY ENDS

for through-milling

| Code | Model | Finish |
|-------------|-------------|--------|
| F0007000006 | FYNN HI L+R | black |

FYNN DIY

recessed micro profile

FYNN is a micro profile with asymmetrical light projection, designed for flush panel recessed installation in a through-milling or blind-milling with a width of 6,5mm and a depth of 8mm, recommended for use under shelves. The shape of the profile, with two micro protrusions, hides any irregularities in the groove edges (mouse-bite) and recess the focal point, reducing the dazzle effect. FYNN can be configured for horizontal installation with rear light projection and power cord on the right side (FYNN DX-OR), alternatively with front light projection and power cord on the left side. Or with rear light projection and power cord on the left side (FYNN SX-OR), alternatively with front light projection and power cord on the right side. FYNN integrates "sliding" LED modules without adhesive base, 4mm wide.

FYNN DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------------|-------|--------|-----------|----------------|---------------|------------------|--------|------|------|-------|-----|
| F0212000002 | UHE4 | 20m | 238 LED/m | 29,4mm (7 LED) | 9,6W/m @24VDC | super warm white | 2700 K | 1100 | 115 | Ra 90 | E |
| F0212000001 | UHE4 | 20m | 238 LED/m | 29,4mm (7 LED) | 9,6W/m @24VDC | warm white | 3000 K | 1100 | 115 | Ra 90 | E |
| F0212000003 | UHE4 | 20m | 238 LED/m | 29,4mm (7 LED) | 9,6W/m @24VDC | natural white | 4200 K | 1200 | 125 | Ra 90 | E |
| 1631701B1/SHE/2000 | SHE4 | 20m | 168 LED/m | 41,7mm (7 LED) | 10W/m @24VDC | super warm white | 2700 K | 780 | 78 | Ra 90 | G |
| 1631701B/SHE/2000 | SHE4 | 20m | 168 LED/m | 41,7mm (7 LED) | 10W/m @24VDC | warm white | 3000 K | 780 | 78 | Ra 90 | G |
| 1631701N/SHE/2000 | SHE4 | 20m | 168 LED/m | 41,7mm (7 LED) | 10W/m @24VDC | natural white | 4500 K | 780 | 78 | Ra 90 | G |




<https://www.domusline.com/warning-dyi-profiles/>



MICY DIY PROFILE

extruded aluminium

| Code | Lenght | Finish |
|-------------|--------|------------|
| 4128305/200 | 2000mm | alluminium |
| 4128305/300 | 3000mm | alluminium |



MICY DIY DIFFUSER

extruded polycarbonate

| Code | Lenght | Finish |
|-------------|--------|--------|
| 3063601/200 | 2000mm | white |
| 3063601/300 | 3000mm | white |
| 3063664/200 | 2000mm | black |
| 3063664/300 | 3000mm | black |



MICY DIY ENDS

for through-milling

| Code | Lenght | Finish |
|---------|--------|--------|
| 4010001 | MICY | white |
| 4010046 | MICY | black |



MICY DIY CLIPS

| Code | Model | QTY |
|---------|-------|-----|
| 4009500 | MICY | 2 |

MICY DIY

recessed profile

MICY is a profile with symmetrical light projection, designed for recessed installation in a blind-milling or through-milling with a width of 14,5mm and a depth of 11mm, recommended for use under shelves. The shape of the profile, with two micro protrusions, hides any irregularities in the groove edges (mouse-bite). MICY is supplied with lateral pressure steel clips, allowing the profile to be installed without adhesives and easily removed if necessary. MICY integrates LED module with adhesive base, 6mm wide.

MICY DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------------|------------|--------|-----------|----------------|----------------|------------------|--------|------|------|-------|-----|
| F0298000001 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | super warm white | 2700 K | 1040 | 186 | Ra 85 | C |
| F0298000002 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | warm white | 3000 K | 1040 | 186 | Ra 85 | C |
| F0298000003 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | natural white | 4000 K | 1100 | 196 | Ra 85 | B |
| 1590701B1/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | super warm white | 2700 K | 1420 | 99 | Ra 80 | F |
| 1590701B/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | warm white | 3000 K | 1420 | 99 | Ra 80 | F |
| 1590701N/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | natural white | 4000 K | 1420 | 99 | Ra 80 | F |
| 1394101B1/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | super warm white | 2700 K | 910 | 91 | Ra 90 | G |
| 1394101B/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | warm white | 3100 K | 940 | 94 | Ra 90 | F |
| 1394101N/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | natural white | 4200 K | 980 | 98 | Ra 90 | F |

FLEXYLED D-M

dual colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|-------------|---------------|--------|---------------|------------------|--------------|----------------|-------------|------|------|-------|-----|
| F0206000001 | SHEP6B D-M | 20m | 204+204 LED/m | 25mm (7 LED) | 10W/m @24VDC | white D-Motion | 3000-4000 K | 780 | 78 | Ra 90 | G |
| F0218000007 | UHE6B CSP D-M | 20m | 304+304 LED/m | 26,3mm (8+8 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 968 | 97 | Ra 92 | F |

FLEXYLED D-MWA

dual colour wave



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|-------------|------------|--------|---------------|----------------|---------------|---------------------|-------------|------|------|-------|-----|
| F0091000001 | HE6B D-MWA | 10m | 120+120 LED/m | 50mm (6+6 LED) | 9,6W/m @24VDC | white D-Motion Wave | 2700-4000 K | 1054 | 110 | Ra 81 | F |



FLEXYLED D-MWA must be connected to a D-MWA (D-Motion Wave) control system by Domus Line.




<https://www.domusline.com/warning-dyi-profiles/>



THEA DIY PROFILE

extruded aluminium


| Type | Code | Lenght | Finish |
|--------|-------------|--------|------------|
| Type A | 4128205/200 | 2000mm | alluminium |
| Type A | 4128205/300 | 3000mm | alluminium |
| Type B | 4128232/200 | 2000mm | black matt |
| Type B | 4128232/300 | 3000mm | black matt |
| Type C | 4128250/200 | 2000mm | dark inox |
| Type C | 4128250/300 | 3000mm | dark inox |



THEA DIY DIFFUSER

extruded polycarbonate

| Code | Lenght | Finish |
|-------------|--------|--------|
| 3063501/200 | 2000mm | white |
| 3063501/300 | 3000mm | white |

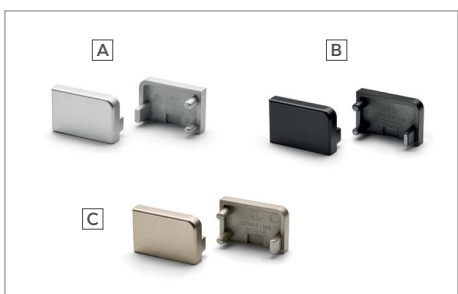

THEA DIY ENDS

| Type | Code | Model | Finish |
|--------|---------|-----------|------------|
| Type A | 4009810 | THEA IP20 | alluminium |
| Type B | 4009832 | THEA IP20 | black matt |
| Type C | 4009850 | THEA IP20 | dark inox |



THEA XO DIY CLIPS

| Code | Model | QTY |
|---------|-------|-----|
| 4009900 | THEA | 2+2 |

THEA DIY

surface-mounted profile

THEA is an asymmetrical light projection profile, designed for surface installation, recommended for kitchen under-cabinet adjacent to the wall or backsplash. THEA integrates LED module with adhesive base 6mm wide.

THEA DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------------|------------|--------|-----------|----------------|----------------|------------------|--------|------|------|-------|-----|
| 1590701B1/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | super warm white | 2700 K | 1420 | 99 | Ra 80 | F |
| 1590701B/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | warm white | 3000 K | 1420 | 99 | Ra 80 | F |
| 1590701N/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | natural white | 4000 K | 1420 | 99 | Ra 80 | F |
| F0298000001 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | super warm white | 2700 K | 1040 | 186 | Ra 85 | C |
| F0298000002 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | warm white | 3000 K | 1040 | 186 | Ra 85 | C |
| F0298000003 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | natural white | 4000 K | 1100 | 196 | Ra 85 | B |
| 1394101B1/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | super warm white | 2700 K | 910 | 91 | Ra 90 | G |
| 1394101B/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | warm white | 3100 K | 940 | 94 | Ra 90 | F |
| 1394101N/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | natural white | 4200 K | 980 | 98 | Ra 90 | F |

FLEXYLED D-M

dual colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------|---------------|--------|---------------|------------------|--------------|----------------|-------------|------|------|-------|-----|
| 1552701/2000 | SHE6B D-M | 20m | 168+168 LED/m | 41,7mm (7+7 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 780 | 78 | Ra 90 | G |
| F0218000007 | UHE6B CSP D-M | 20m | 304+304 LED/m | 26,3mm (8+8 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 968 | 97 | Ra 92 | F |

FLEXYLED D-MWA

dual colour wave



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|-------------|------------|--------|---------------|----------------|---------------|---------------------|-------------|------|------|-------|-----|
| F0091000001 | HE6B D-MWA | 10m | 120+120 LED/m | 50mm (6+6 LED) | 9,6W/m @24VDC | white D-Motion Wave | 2700-4000 K | 1054 | 110 | Ra 81 | F |



FLEXYLED D-MWA must be connected to a D-MWA (D-Motion Wave) control system by Domus Line.




<https://www.domusline.com/warning-dyi-profiles/>



TYNN DIY PROFILE

extruded aluminium

| Type | Code | Length | Finish |
|--------|-------------|--------|------------|
| Type A | 4136505/200 | 2000mm | aluminium |
| Type A | 4136505/300 | 3000mm | aluminium |
| Type B | 4136532/200 | 2000mm | black matt |
| Type B | 4136532/300 | 3000mm | black matt |



TYNN DIY

surface-mounted LED profile

TYNN is a surface-mounted profile with symmetrical light projection, inclined at 20°, recommended for installation under shelves. TYNN integrates SE H4-24 PRO and SE H4-24 PRO D-M LED modules.



SE H4-24 PRO

with two power cables

| Lenght | Watt | Volt |
|--------|------|-------|
| 1000mm | 10W | 24VDC |
| 2000mm | 20W | 24VDC |
| 3000mm | 30W | 24VDC |
| 6000mm | 60W | 24VDC |



SE H4-24 PRO integrates a FREE-CUT light source that allows the module to be cut to the desired length at any point of the profile.




The luminaire is protected from water splashes from all directions, preventing these from penetrating in damaging quantities (IP44).



The indicated CCT (Correlated Colour Temperatures) refer to the light sources integrated into the profile. The milky-effect diffusing silicone coating guarantees the colour temperatures in a range of 2900-3250K (WW) and 4000-4500K (NW).



The end caps of SE H4-24 PRO are the same size as the profile allowing the entire profile to be flush panel recessed into the groove. The power cord may exit axially or radially to the installation surface.



values referred to
SE H4-24 PRO 5000 K 1000mm

| | | |
|---------------------|------------|---------------|
| Colour appearance | warm white | natural white |
| Colour temperature | 3400 K | 5000 K |
| Luminous flux | 800 lm/m | 1040 lm/m |
| Luminous efficiency | 80 lm/W | 104 lm/W |
| CRI | Ra 90 | Ra 90 |

SE H4-24 PRO

siliconic LED micro profile

SE H4-24 PRO is a micro profile with symmetrical light projection, designed for flush panel recessed installation in a through-milling with a width of 4mm and a depth of 8mm, recommended for use on any furnishing element. The luminaire is protected from water splashes from all directions, preventing these from penetrating in damaging quantities (IP44). Developed with milky-effect diffusing silicone coating technology, it integrates a single-colour FREE-CUT LED module with 180 LEDs/m that allows it to be cut to the desired length at any point on the profile. Upon request, SE H4-24 PRO is also available in custom lengths of up to 6000mm (IP20), complete with a 2000mm power cord that can exit radially or axially to the installation surface from end caps the same size as the profile. Power supply not included, to be ordered separately.





SE H4-24 PRO D-M

with two power cables

| Lenght | Watt | Volt |
|--------|------|-------|
| 1000mm | 10W | 24VDC |
| 2000mm | 20W | 24VDC |
| 3000mm | 30W | 24VDC |
| 6000mm | 60W | 24VDC |



SE H4-24 PRO D-M integrates a FREE-CUT light source that allows it to be cut to the desired length at any point on the profile.





The luminaire is protected from water splashes from all directions, preventing these from penetrating in damaging quantities (IP44).



The indicated CCT (Correlated Colour Temperature) refers to the light source integrated into the profile. The milky-effect diffusing silicone coating guarantees the colour temperatures in a range of 2500-2800K (WW) and 3800-4400K (NW).



The end caps of SE H4-24 PRO D-M are the same size as the profile allowing the entire profile to be flush panel recessed into the groove. The power cord may exit axially or radially to the installation surface.



values referred to
SE H4-24 PRO D-M 1000mm


| | |
|---------------------|-------------------|
| Colour appearance | white D-Motion |
| Colour temperature | 3000 - 5000 K |
| Luminous flux | 1100 lm/m |
| Luminous efficiency | 110 lm/W |
| CRI | Ra 90 |

SE H4-24 PRO D-M



siliconic dual colour LED micro profile

SE H4-24 PRO D-Motion is a micro profile with symmetrical light projection, designed for flush panel recessed installation in a through-milling with a width of 4mm and a depth of 8mm, recommended for use on any furnishing element. The luminaire is protected from water splashes from all directions, preventing these from penetrating in damaging quantities (IP44). Developed with milky-effect diffusing silicone coating technology, it integrates a dual-colour FREE-CUT LED module with 156+156 LEDs/m that allows it to be cut to the desired length at any point on the profile. Upon request, SE H4-24 PRO D-M is also available in custom lengths of up to 6000mm (IP20), complete with a 2000mm power cord that can exit radially or axially to the installation surface from end caps the same size as the profile. Power supply not included, to be ordered separately.







KISY DIY PROFILE

extruded polycarbonate

| Type | Code | Lenght | Model |
|--------|-------------|--------|--------|
| Type A | 3080003/200 | 2000mm | KISY-6 |
| Type A | 3080003/300 | 3000mm | KISY-6 |
| Type B | 3080103/200 | 2000mm | KISY-8 |
| Type B | 3080103/300 | 3000mm | KISY-8 |

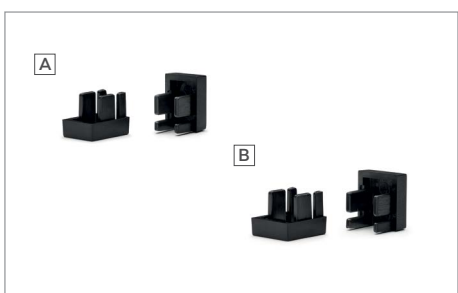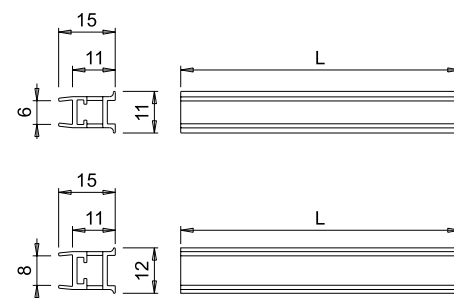

KISY DIY ENDS

| Type | Code | Model | Finish |
|--------|---------|--------|--------|
| Type A | 4017403 | KISY-6 | black |
| Type B | 4017503 | KISY-8 | black |

KISY DIY

profile for glass shelves

KISY is a profile with “up and down” light projection designed for installation on the edge of 6mm or 8mm thick glass shelves, recommended for use in living room and kitchen furniture. The shape and finish of the profile, featuring an opal light chamber on two sides, allows the luminaire to be configured for projection axial to the installation surface both on the top and on the bottom side, without reflections behind the edge. The end caps and the rear empty chamber are designed to ensure proper positioning and cable exit at any point along the profile, on the side behind the installation surface. KISY integrates “sliding” LED modules without adhesive base, 6mm wide.

KISY DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------------|-------|--------|-----------|--------------|--------------|------------------|--------|------|------|-------|-----|
| 1575501B1/UHE/2000 | UHE6 | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | super warm white | 2700 K | 910 | 91 | Ra 90 | G |
| 1575501B/UHE/2000 | UHE6 | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | warm white | 3100 K | 940 | 94 | Ra 90 | F |
| 1575501N/UHE/2000 | UHE6 | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | natural white | 4200 K | 980 | 98 | Ra 90 | F |

FLEXYLED D-M

dual colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------|--------------|--------|---------------|------------------|--------------|----------------|-------------|------|------|-------|-----|
| 1656001/2000 | UHE6 CSP D-M | 20m | 304+304 LED/m | 26,3mm (8+8 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 968 | 97 | Ra 92 | F |




<https://www.domusline.com/warning-dyi-profiles/>



NUBO-6 DIY PROFILE

extruded polycarbonate


| Code | Lenght | Finish |
|-------------|--------|--------|
| F0005000071 | 2000mm | white |
| F0005000074 | 3000mm | white |



NUBO-8 DIY PROFILE

extruded polycarbonate


| Code | Lenght | Finish |
|-------------|--------|--------|
| F0005000072 | 2000mm | white |
| F0005000075 | 3000mm | white |

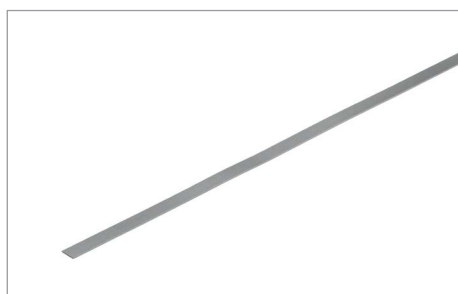

NUBO DIY STEEL FLAT BAR

stainless steel

| Code | Lenght | Finish |
|--------------|--------|--------|
| 4144006/2000 | 2000mm | steel |
| 4144006/3000 | 3000mm | steel |

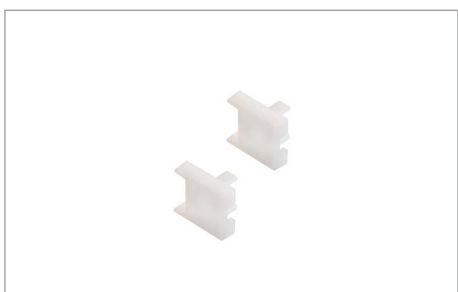

NUBO DIY ENDS

universal

| Code | Model | Finish |
|-------------|------------|--------|
| F0005000073 | NUBO-6 (8) | white |

NUBO DIY

micro profile LED for glass shelves

NUBO-6 and NUBO-8 are micro profile with symmetrical light projection, designed for installation on the edge of 6mm or 8mm thick glass shelves, recommended for use in living room and kitchen furniture. The shape and finish of the profile, featuring a four-sided opal light chamber, allows the luminaire to be configured for radial light projection onto the installation surface or on the rear side, towards the back of the furniture. NUBO integrate LED modules with adhesive base 6mm wide and 4mm CSP D-M.

NUBO DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------------|-----------|--------|-----------|----------------|----------------|------------------|--------|------|------|-------|-----|
| 1590701B1/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | super warm white | 2700 K | 1420 | 99 | Ra 80 | F |
| 1590701B/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | warm white | 3000 K | 1420 | 99 | Ra 80 | F |
| 1590701N/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | natural white | 4000 K | 1420 | 99 | Ra 80 | F |
| 1394101B1/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | super warm white | 2700 K | 910 | 91 | Ra 90 | G |
| 1394101B/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | warm white | 3100 K | 940 | 94 | Ra 90 | F |
| 1394101N/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | natural white | 4000 K | 980 | 98 | Ra 90 | F |

FLEXYLED D-M

dual colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|-------------|---------------|--------|---------------|------------------|-------------|----------------|-------------|------|------|-------|-----|
| F0313000001 | UHE4B CSP D-M | 20m | 304+304 LED/m | 26,3mm (8+8 LED) | 8W/m @24VDC | white D-Motion | 2700-4000 K | 800 | 100 | Ra 90 | F |




<https://www.domusline.com/warning-dyi-profiles/>



SUNUP DIY PROFILE

extruded polycarbonate


| Code | Lenght | Finish |
|-------------|--------|--------|
| F0005000055 | 2000mm | white |
| F0005000045 | 3000mm | white |



SUNUP DIY SUPPORT

extruded alluminium

| Code | Lenght | Finish |
|-------------|--------|------------|
| F0006000058 | 2000mm | alluminium |
| F0006000049 | 3000mm | alluminium |

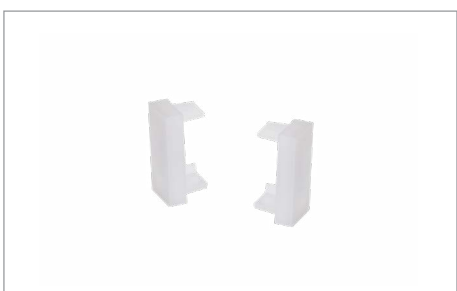

SUNUP DIY ENDS

| Code | Model | QTY |
|-------------|-------|-------|
| F0005000046 | SUNUP | white |

SUNUP DIY

LED profile for wooden shelves

SUNUP is a profile with symmetric light projection reflected on the vertical axis for rear-shelf installation, recommended for application on elements with a thickness of 18mm. The device consists of a “male” aluminium profile that is fixed to the edge of the panel, onto which the “female” diffuser profile with the light chamber is hooked. SUNUP integrates LED modules with adhesive base 6mm wide.

SUNUP DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------------|------------|--------|-----------|----------------|----------------|------------------|--------|------|------|-------|-----|
| 1590701B1/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | super warm white | 2700 K | 1420 | 99 | Ra 80 | F |
| 1590701B1/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | warm white | 3000 K | 1420 | 99 | Ra 80 | F |
| 1590701B1/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | natural white | 4000 K | 1420 | 99 | Ra 80 | F |
| F0298000001 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | super warm white | 2700 K | 1040 | 186 | Ra 85 | C |
| F0298000002 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | warm white | 3000 K | 1040 | 186 | Ra 85 | C |
| F0298000003 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | natural white | 4000 K | 1100 | 196 | Ra 85 | B |
| 1394101B1/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | super warm white | 2700 K | 910 | 91 | Ra 90 | G |
| 1394101B/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | warm white | 3100 K | 940 | 94 | Ra 90 | F |
| 1394101N/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | natural white | 4200 K | 980 | 98 | Ra 90 | F |

FLEXYLED D-M

dual colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------|---------------|--------|---------------|------------------|--------------|----------------|-------------|------|------|-------|-----|
| 1552701/2000 | SHE6B D-M | 20m | 168+168 LED/m | 41,7mm (7+7 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 780 | 78 | Ra 90 | G |
| F0206000001 | SHEP6B D-M | 20m | 204+204 LED/m | 25mm (7 LED) | 10W/m @24VDC | white D-Motion | 3000-4000 K | 780 | 78 | Ra 90 | G |
| F0218000007 | UHE6B CSP D-M | 20m | 304+304 LED/m | 26,3mm (8+8 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 968 | 97 | Ra 92 | F |




<https://www.domusline.com/warning-dyi-profiles/>



KOBI DIY PROFILE

extruded aluminium

| Code | Lenght | Finish |
|--------------|--------|------------------|
| 4124309A/200 | 2000mm | alluminium brill |
| 4124309A/300 | 3000mm | alluminium brill |
| 4124346/200 | 2000mm | black touch |
| 4124346/300 | 3000mm | black touch |

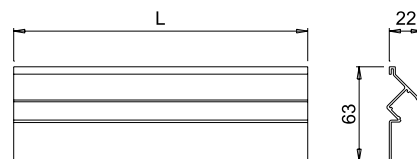

KOBI DIY DIFFUSER

extruded polycarbonate

| Code | Lenght | Finish |
|-------------|--------|--------|
| 3047701/200 | 2000mm | white |
| 3047701/300 | 3000mm | white |



KOBI DIY ENDS

| Code | Finish | QTY |
|---------|------------------|-----|
| 4008709 | alluminium brill | 2 |
| 4008746 | black touch | 2 |

KOBI DIY

surface-mounted micro profile

KOBI is an asymmetrical light projection profile, designed for surface installation, recommended for application on mirror frames. KOBI integrates LED modules with adhesive base, available in 6mm and 8mm wide.

KOBI DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------------|------------|--------|-----------|----------------|----------------|------------------|--------|------|------|-------|-----|
| 1590701B1/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | super warm white | 2700 K | 1420 | 99 | Ra 80 | F |
| 1590701B/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | warm white | 3000 K | 1420 | 99 | Ra 80 | F |
| 1590701N/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | natural white | 4000 K | 1420 | 99 | Ra 80 | F |
| F0298000001 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | super warm white | 2700 K | 1040 | 186 | Ra 85 | C |
| F0298000002 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | warm white | 3000 K | 1040 | 186 | Ra 85 | C |
| F0298000003 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | natural white | 4000 K | 1100 | 196 | Ra 85 | B |
| 1394101B1/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | super warm white | 2700 K | 910 | 91 | Ra 90 | G |
| 1394101B/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | warm white | 3100 K | 940 | 94 | Ra 90 | F |
| 1394101N/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | natural white | 4200 K | 980 | 98 | Ra 90 | F |
| 1557601B1/2000 | HE8B | 20m | 120 LED/m | 50mm (6 LED) | 9,6W/m @24VDC | super warm white | 2700 K | 820 | 85 | Ra 90 | G |
| 1557601B/2000 | HE8B | 20m | 120 LED/m | 50mm (6 LED) | 9,6W/m @24VDC | warm white | 3000 K | 840 | 87 | Ra 90 | G |
| 1557601N/2000 | HE8B | 20m | 120 LED/m | 50mm (6 LED) | 9,6W/m @24VDC | natural white | 4000 K | 880 | 92 | Ra 90 | G |

FLEXYLED D-M

dual colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------|---------------|--------|---------------|------------------|--------------|----------------|-------------|------|------|-------|-----|
| 1552701/2000 | SHE6B D-M | 20m | 168+168 LED/m | 41,7mm (7+7 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 780 | 78 | Ra 90 | G |
| F0218000007 | UHE6B CSP D-M | 20m | 304+304 LED/m | 26,3mm (8+8 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 968 | 97 | Ra 92 | F |

FLEXYLED D-MWA

dual colour wave



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|-------------|------------|--------|---------------|----------------|---------------|---------------------|-------------|------|------|-------|-----|
| F0091000001 | HE6B D-MWA | 10m | 120+120 LED/m | 50mm (6+6 LED) | 9,6W/m @24VDC | white D-Motion Wave | 2700-4000 K | 1054 | 110 | Ra 81 | F |



FLEXYLED D-MWA must be connected to a D-MWA (D-Motion Wave) control system by Domus Line.




<https://www.domusline.com/warning-dyi-profiles/>



BLADE DIY PROFILE

extruded aluminium


| Code | Length | Finish |
|-------------|--------|------------|
| 4136005/200 | 2000mm | aluminium |
| 4136005/300 | 3000mm | aluminium |
| 4136032/200 | 2000mm | black matt |
| 4136032/300 | 3000mm | black matt |



BLADE DIY DIFFUSER

extruded polycarbonate

| Code | Length | Finish |
|-------------|--------|--------|
| 3066901/200 | 2000mm | white |
| 3066901/300 | 3000mm | white |

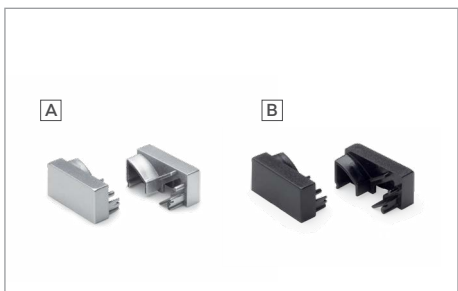

BLADE DIY END CAPS

for profile without sensor

| Tipo | Code | Model | Finish |
|--------|---------|-------|-----------|
| Type A | 4010610 | BLADE | aluminium |
| Type B | 4010632 | BLADE | black |



MOUNTING SET BLADE DIY

| Code | Model | QTY |
|---------|-----------|-----|
| 4010700 | universal | 2 |

BLADE DIY

surface-mounted profile

BLADE is a profile with asymmetrical light projection, designed for surface installation, recommended for under-cabinet application. BLADE can be configured for horizontal installation with rear light projection and power cord on the right side (BLADE DX-OR), alternatively with front light projection and power cord on the left side. Or with rear light projection and power cord on the left side (BLADE SX-OR), alternatively with front light projection and power cord on the right side. BLADE integrates 6mm wide LED modules with adhesive base and pre-wired, touch-dimmer (TD) or motion (IFR) sensors (PW) (page 2).



BLADE TD DIY

with touch-dimmer sensor

| Type | Code | Model | Finish |
|--------|---------|----------|------------|
| Type A | 1783510 | TD DX-OR | alluminium |
| Type A | 1783503 | TD DX-OR | black |
| Type B | 1783610 | TD SX-OR | alluminium |
| Type B | 1783603 | TD SX-OR | black |

24Vdc

Micro 24



The touch-dimmer sensor switch allows switching on, switching off, and adjusting the brightness (10-100%) of the individual luminaire.



BLADE IFR DIY

with motion sensor

| Type | Code | Model | Finish |
|--------|---------|-----------|------------|
| Type A | 1783710 | IFR DX-OR | alluminium |
| Type A | 1783703 | IFR DX-OR | black |
| Type B | 1783810 | IFR SX-OR | alluminium |
| Type B | 1783803 | IFR SX-OR | black |

24Vdc

Micro 24



The PIR (Passive InfraRed) sensor automatically activates the instant-on and delayed-off (approximately 30 seconds) of the luminaire with the opening and closing of the door of the cabinet where it is installed, as well as with movement within the detection range. For more details, refer to the instruction manual.

BLADE DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------------|------------|--------|-----------|----------------|----------------|------------------|--------|------|------|-------|-----|
| 1394101B1/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | super warm white | 2700 K | 910 | 91 | Ra 90 | G |
| 1394101B/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | warm white | 3100 K | 940 | 94 | Ra 90 | F |
| 1394101N/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | natural white | 4200 K | 980 | 98 | Ra 90 | F |
| F0298000001 | SHEP6B EVO | 10m | 216 LED/m | 42mm (9 LED) | 5,6W/m @24VDC | super warm white | 2700 K | 1040 | 186 | Ra 85 | C |
| F0298000002 | SHEP6B EVO | 10m | 216 LED/m | 42mm (9 LED) | 5,6W/m @24VDC | warm white | 3000 K | 1040 | 186 | Ra 85 | C |
| F0298000003 | SHEP6B EVO | 10m | 216 LED/m | 42mm (9 LED) | 5,6W/m @24VDC | natural white | 4000 K | 1100 | 196 | Ra 85 | B |
| 1590701B1/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | super warm white | 2700 K | 1420 | 99 | Ra 80 | F |
| 1590701B/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | warm white | 3000 K | 1420 | 99 | Ra 80 | F |
| 1590701N/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | natural white | 4000 K | 1420 | 99 | Ra 80 | F |

FLEXYLED D-M

dual colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|-------------|---------------|--------|---------------|------------------|--------------|----------------|-------------|------|------|-------|-----|
| F0218000007 | UHE6B CSP D-M | 20m | 304+304 LED/m | 26,3mm (8+8 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 968 | 97 | Ra 92 | F |





<https://www.domusline.com/warning-dyi-profiles/>



BLADE-IN DIY PROFILE

extruded aluminium

| Code | Length | Finish |
|-------------|--------|------------|
| 4144505/200 | 2000mm | aluminium |
| 4144505/300 | 3000mm | aluminium |
| 4144532/200 | 2000mm | black matt |
| 4144532/300 | 3000mm | black matt |

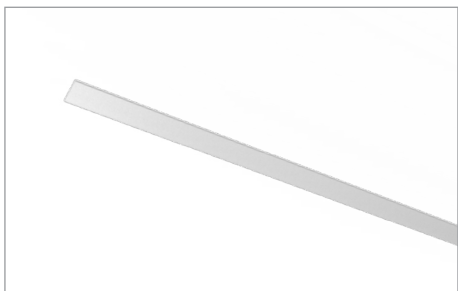

BLADE DIY DIFFUSER

extruded polycarbonate

| Code | Length | Finish |
|-------------|--------|--------|
| 3066901/200 | 2000mm | white |
| 3066901/300 | 3000mm | white |



BLADE-IN DIY END CAPS

for profile without sensor

| Code | Model | Finish |
|---------|----------|-----------|
| 4012210 | BLADE-IN | aluminium |
| 4012232 | BLADE-IN | black |

BLADE-IN DIY

recessed profile

BLADE-IN is a profile with asymmetrical light projection, designed for recessed installation in a through-milling with a width of 20mm and a depth of 9.5mm, recommended for in-cabinet use. BLADE-IN can be configured for horizontal installation with rear light projection and power cord on the right side (BLADE-IN DX-OR), alternatively with front light projection and power cord on the left side. Or with rear light projection and power cord on the left side (BLADE-IN SX-OR), alternatively with front light projection and power cord on the right side. BLADE-IN integrates LED modules with adhesive base 6mm wide.

BLADE-IN DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------------|------------|--------|-----------|----------------|----------------|------------------|--------|------|------|-------|-----|
| 1394101B1/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | super warm white | 2700 K | 910 | 91 | Ra 90 | G |
| 1394101B/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | warm white | 3100 K | 940 | 94 | Ra 90 | F |
| 1394101N/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | natural white | 4200 K | 980 | 98 | Ra 90 | F |
| 1590701B1/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | super warm white | 2700 K | 1420 | 99 | Ra 80 | F |
| 1590701B/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | warm white | 3000 K | 1420 | 99 | Ra 80 | F |
| 1590701N/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | natural white | 4000 K | 1420 | 99 | Ra 80 | F |
| F0298000001 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | super warm white | 2700 K | 1040 | 186 | Ra 85 | C |
| F0298000002 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | warm white | 3000 K | 1040 | 186 | Ra 85 | C |
| F0298000003 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | natural white | 4000 K | 1100 | 196 | Ra 85 | B |

FLEXYLED D-M

dual colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|-------------|---------------|--------|---------------|------------------|--------------|----------------|-------------|------|------|-------|-----|
| F0218000007 | UHE6B CSP D-M | 20m | 304+304 LED/m | 26,3mm (8+8 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 968 | 97 | Ra 92 | F |




<https://www.domusline.com/warning-dyi-profiles/>



DIVA DIY PROFILE

extruded aluminium

| Code | Length | Finish |
|-------------|--------|------------|
| 3177405/200 | 2000mm | aluminium |
| 3177405/300 | 3000mm | aluminium |
| 3177432/200 | 2000mm | black matt |
| 3177432/300 | 3000mm | black matt |

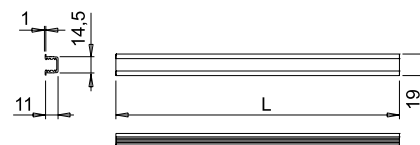

DIVA DIY DIFFUSER

extruded polycarbonate

| Code | Length | Finish |
|-------------|--------|--------|
| 3032101/200 | 2000mm | white |
| 3032101/300 | 3000mm | white |



DIVA DIY ENDS

for blind-milling

| Code | Model | Finish |
|---------|-------|------------|
| 4005310 | DIVA | aluminium |
| 4005332 | DIVA | black matt |

DIVA DIY

recessed profile

DIVA is a profile with symmetrical light projection, designed for recessed installation in a blind- or through-milled groove measuring 14.5 mm wide and 12 mm deep, recommended for use under shelves. The shape of the profile, with two protrusions, conceals any irregularities of the groove edges (mouse-bite). DIVA integrates LED modules with adhesive base, 6mm and 8mm wide.

DIVA DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------------|------------|--------|-----------|----------------|----------------|------------------|--------|------|------|-------|-----|
| 1590701B1/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | super warm white | 2700 K | 1420 | 99 | Ra 80 | F |
| 1590701B1/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | warm white | 3000 K | 1420 | 99 | Ra 80 | F |
| 1590701B1/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | natural white | 4000 K | 1420 | 99 | Ra 80 | F |
| F0298000001 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | super warm white | 2700 K | 1040 | 186 | Ra 85 | C |
| F0298000002 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | warm white | 3000 K | 1040 | 186 | Ra 85 | C |
| F0298000003 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | natural white | 4000 K | 1100 | 196 | Ra 85 | B |
| 1394101B1/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | super warm white | 2700 K | 910 | 91 | Ra 90 | G |
| 1394101B/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | warm white | 3100 K | 940 | 94 | Ra 90 | F |
| 1394101N/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | natural white | 4200 K | 980 | 98 | Ra 90 | F |
| 1557601B1/2000 | HE8B | 20m | 120 LED/m | 50mm (6 LED) | 9,6W/m @24VDC | super warm white | 2700 K | 820 | 85 | Ra 90 | G |
| 1557601B/2000 | HE8B | 20m | 120 LED/m | 50mm (6 LED) | 9,6W/m @24VDC | warm white | 3000 K | 840 | 87 | Ra 90 | G |
| 1557601N/2000 | HE8B | 20m | 120 LED/m | 50mm (6 LED) | 9,6W/m @24VDC | natural white | 4000 K | 880 | 92 | Ra 90 | G |

FLEXYLED

dual colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------|---------------|--------|---------------|------------------|--------------|----------------|-------------|------|------|-------|-----|
| 1552701/2000 | SHE6B D-M | 20m | 168+168 LED/m | 41,7mm (7+7 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 780 | 78 | Ra 90 | G |
| F0218000007 | UHE6B CSP D-M | 20m | 304+304 LED/m | 26,3mm (8+8 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 968 | 97 | Ra 92 | F |

FLEXYLED

dual colour wave



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|-------------|------------|--------|---------------|----------------|---------------|---------------------|-------------|------|------|-------|-----|
| F0091000001 | HE6B D-MWA | 10m | 120+120 LED/m | 50mm (6+6 LED) | 9,6W/m @24VDC | white D-Motion Wave | 2700-4000 K | 1054 | 110 | Ra 81 | F |



FLEXYLED D-MWA must be connected to a D-MWA (D-Motion Wave) control system by Domus Line.




<https://www.domusline.com/warning-dyi-profiles/>



MISS DIY PROFILE

extruded aluminium

| Type | Code | Lenght | Finish |
|--------|-------------|--------|------------|
| Type A | 4124205/200 | 2000mm | alluminium |
| Type A | 4124205/300 | 3000mm | alluminium |
| Type B | 4124232/200 | 2000mm | black matt |
| Type B | 4124232/300 | 3000mm | black matt |

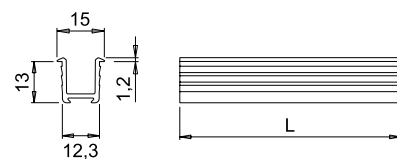


APEX DIY PROFILE

extruded polycarbonate

| Type | Code | Lenght | Finish |
|--------|-------------|--------|-----------|
| Type A | 3055301/200 | 2000mm | white |
| Type A | 3055301/300 | 3000mm | white |
| Type B | 3055360/200 | 2000mm | grey fumé |
| Type B | 3055360/300 | 3000mm | grey fumé |
| Type C | 3055364/200 | 2000mm | black* |
| Type C | 3055364/300 | 3000mm | black* |

*polymethylmethacrylate

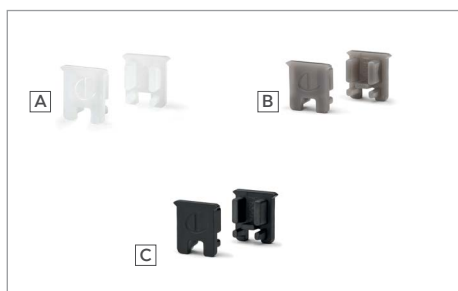

APEX HI AND MISS HI ENDS

for through-milling

| Type | Code | Model | Finish |
|--------|---------|---------|-----------|
| Type A | 4016501 | MISS HI | white |
| Type B | 4016560 | MISS HI | grey fumé |
| Type C | 4016546 | MISS HI | black |



MISS END CAPS

for blind-milling

| Type | Codice | Modello | Finitura |
|--------|---------|---------|------------|
| Type A | 4008510 | MISS | alluminium |
| Type B | 4008532 | MISS | black |

MISS DIY

recessed micro profile

MISS is a micro profile with symmetrical light projection, designed for recessed installation in a blind-milling or through-milling with a width of 12,3mm and a depth of 13,5mm, recommended for use under shelves. The shape of the profile, with two micro protrusions, hides any irregularities in the groove edges (mouse-bite). MISS integrates APEX in opal white finish, made using multi-layer co-extrusion, which ensures a smoky appearance when the luminaire is off and a no dots effect when on. Also available in black with Night&Day effect (black when the light source is off and white when it is on). APEX integrates 6mm wide "sliding" LED modules.

MISS DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------------|-----------|--------|-----------|----------------|----------------|------------------|--------|------|------|-------|-----|
| 1308301B1/SHE | SHE6 PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | super warm white | 2700 K | 1420 | 99 | Ra 80 | F |
| 1308301B/SHE | SHE6 PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | warm white | 3000 K | 1420 | 99 | Ra 80 | F |
| 1308301N/SHE | SHE6 PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | natural white | 4000 K | 1420 | 99 | Ra 80 | F |
| F0298000014 | SHEP6 EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | super warm white | 2700 K | 1040 | 186 | Ra 85 | C |
| F0298000015 | SHEP6 EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | warm white | 3000 K | 1040 | 186 | Ra 85 | C |
| F0298000016 | SHEP6 EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | natural white | 4000 K | 1100 | 196 | Ra 85 | B |
| 1575501B1/UHE/2000 | UHE6 | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | super warm white | 2700 K | 910 | 91 | Ra 90 | G |
| 1575501B/UHE/2000 | UHE6 | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | warm white | 3100 K | 940 | 94 | Ra 90 | F |
| 1575501N/UHE/2000 | UHE6 | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | natural white | 4000 K | 980 | 98 | Ra 90 | F |

FLEXYLED D-M

dual colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|---------------|--------------|--------|---------------|------------------|--------------|----------------|-------------|------|------|-------|-----|
| 16556001/2000 | SHE6 D-M | 20m | 168+168 LED/m | 41,7mm (7+7 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 780 | 78 | Ra 90 | G |
| 1656001/2000 | UHE6 CSP D-M | 20m | 304+304 LED/m | 26,3mm (8+8 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 968 | 97 | Ra 92 | F |

FLEXYLED D-MWA

dual colour wave



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------|------------|--------|----------------|----------------|---------------|---------------------|-------------|------|------|-------|-----|
| 1655301/1000 | HE6 D-MWA | 10m | 50mm (6+6 LED) | 50mm (6+6 LED) | 9,6W/m @24VDC | white D-Motion Wave | 2700-4000 K | 1054 | 110 | Ra 81 | F |
| F0218000033 | UHE6 D-MWA | 10m | 25mm (6+6 LED) | 25mm (6+6 LED) | 9,6W/m @24VDC | white D-Motion Wave | 2700-4000 K | 1100 | 115 | Ra 83 | F |



FLEXYLED D-MWA must be connected to a D-MWA (D-Motion Wave) control system by Domus Line.




<https://www.domusline.com/warning-dyi-profiles/>



LAB DIY PROFILE

extruded aluminium

| Type | Code | Length | Finish |
|--------|-------------|--------|------------|
| Type A | 4122105/200 | 2000mm | aluminium |
| Type A | 4122105/300 | 3000mm | aluminium |
| Type B | 4122132/200 | 2000mm | black matt |
| Type B | 4122132/300 | 3000mm | black matt |

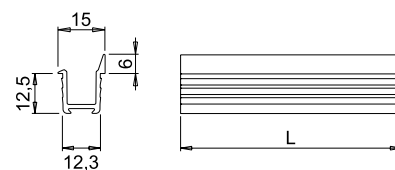


APEX DIY PROFILE

extruded polycarbonate

| Type | Code | Length | Finish |
|--------|-------------|--------|-----------|
| Type A | 3055301/200 | 2000mm | white |
| Type A | 3055301/300 | 3000mm | white |
| Type B | 3055360/200 | 2000mm | grey fumé |
| Type B | 3055360/300 | 3000mm | grey fumé |
| Type C | 3055364/200 | 2000mm | black* |
| Type C | 3055364/300 | 3000mm | black* |

*polymethylmethacrylate

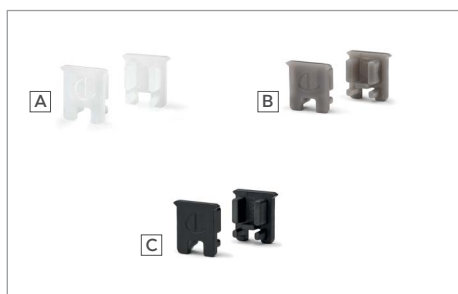

APEX HI AND LAB HI ENDS

for through-milling

| Type | Code | Model | Finish |
|--------|---------|--------|-----------|
| Type A | 4016501 | LAB HI | white |
| Type B | 4016560 | LAB HI | grey fumé |
| Type C | 4016564 | LAB HI | black |



LAB ENDS

for blind-milling

| Type | Code | Model | Finish |
|--------|---------|-------|-----------|
| Type A | 4007410 | LAB | aluminium |
| Type B | 4007432 | LAB | black |

LAB DIY

recessed micro profile

LAB is a micro profile with symmetrical light projection, designed for recessed installation in a blind-milling or through-milling with a width of 12,3mm and a depth of 13,5mm, recommended for use under shelves. The shape of the profile, with two micro protrusions and anti-glare shield, hides any irregularities in the groove edges (mouse-bite) and masks the focal point of the light source on the front side of the shelf. LAB integrates APEX profile that is available in a white opal finish, in multi-layer co-extrusion that ensures a grey fumé finish when the device is off and a “no dots” effect when the device is on, and black with Night&Day effect (black when the light is off and white when the light is on). Upon request, LAB can also be configured with a black matt profile and black finish diffuser screen. LAB integrates 6mm wide “sliding” LED modules.

LAB DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------------|-----------|--------|-----------|----------------|----------------|------------------|--------|------|------|-------|-----|
| 1308301B1/SHE | SHE6 PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | super warm white | 2700 K | 1420 | 99 | Ra 80 | F |
| 1308301B/SHE | SHE6 PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | warm white | 3000 K | 1420 | 99 | Ra 80 | F |
| 1308301N/SHE | SHE6 PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | natural white | 4000 K | 1420 | 99 | Ra 80 | F |
| F0298000014 | SHEP6 EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | super warm white | 2700 K | 1040 | 186 | Ra 85 | C |
| F0298000015 | SHEP6 EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | warm white | 3000 K | 1040 | 186 | Ra 85 | C |
| F0298000016 | SHEP6 EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | natural white | 4000 K | 1100 | 196 | Ra 85 | B |
| 1575501B1/UHE/2000 | UHE6 | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | super warm white | 2700 K | 910 | 91 | Ra 90 | G |
| 1575501B/UHE/2000 | UHE6 | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | warm white | 3100 K | 940 | 94 | Ra 90 | F |
| 1575501N/UHE/2000 | UHE6 | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | natural white | 4000 K | 980 | 98 | Ra 90 | F |

FLEXYLED D-M

dual colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------|--------------|--------|---------------|------------------|--------------|----------------|-------------|------|------|-------|-----|
| 1655601/2000 | SHE6 D-M | 20m | 168+168 LED/m | 41,7mm (7+7 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 780 | 78 | Ra 90 | G |
| 1656001/2000 | UHE6 CSP D-M | 20m | 304+304 LED/m | 26,3mm (8+8 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 968 | 97 | Ra 92 | F |

FLEXYLED D-MWA

dual colour wave



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------|------------|--------|---------------|----------------|---------------|---------------------|-------------|------|------|-------|-----|
| 1655301/1000 | HE6 D-MWA | 10m | 120+120 LED/m | 50mm (6+6 LED) | 9,6W/m @24VDC | white D-Motion Wave | 2700-4000 K | 1054 | 110 | Ra 81 | F |
| F0218000033 | UHE6 D-MWA | 10m | 240+240 LED/m | 25mm (6+6 LED) | 9,6W/m @24VDC | white D-Motion Wave | 2700-4000 K | 1100 | 115 | Ra 83 | F |



FLEXYLED D-MWA must be connected to a D-MWA (D-Motion Wave) control system by Domus Line.




<https://www.domusline.com/warning-dyi-profiles/>



GOCCIA DIY PROFILE

Extruded aluminium with anti-hanger hook protection

| Code | Length | Finish |
|-------------|--------|------------|
| 2011505/200 | 2000mm | aluminium |
| 2011505/300 | 3000mm | aluminium |
| 2011546/200 | 2000mm | black matt |
| 2011546/300 | 3000mm | black matt |



GOCCIA DIY DIFFUSER

extruded polycarbonate

| Code | Length | Finish |
|-------------|--------|--------|
| 3036201/200 | 2000mm | white |
| 3036201/300 | 3000mm | white |



GOCCIA DIY ENDS

with profile fixing screws

| Code | Model | Finish |
|---------|--------|-----------|
| 4006310 | GOCCIA | aluminium |
| 4006346 | GOCCIA | black |

GOCCIA DIY

LED clothes rail profile

GOCCIA is a LED clothes rail profile with symmetrical light projection for surface installation, recommended for use on shelves in walk-in wardrobes and wardrobes. Made from extruded aluminium, with metal side heads, it features a transparent profile to protect hangers. GOCCIA integrates LED module with adhesive base 8mm wide.

GOCCIA DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|----------------|-------|--------|-----------|--------------|---------------|------------------|--------|------|------|-------|-----|
| 1557601B1/2000 | HE8B | 20m | 120 LED/m | 50mm (6 LED) | 9,6W/m @24VDC | super warm white | 2700 K | 820 | 85 | Ra 90 | G |
| 1557601B/2000 | HE8B | 20m | 120 LED/m | 50mm (6 LED) | 9,6W/m @24VDC | warm white | 3000 K | 840 | 87 | Ra 90 | G |
| 1557601N/2000 | HE8B | 20m | 120 LED/m | 50mm (6 LED) | 9,6W/m @24VDC | natural white | 4000 K | 880 | 92 | Ra 90 | G |




<https://www.domusline.com/warning-dyi-profiles/>



ICY DIY PROFILE

extruded aluminium

| Code | Lenght | Finish |
|-------------|--------|------------|
| 4112905/200 | 2000mm | alluminium |
| 4112905/300 | 3000mm | alluminium |



ICY DIY DIFFUSER

extruded polycarbonate

| Code | Lenght | Finish |
|-------------|--------|--------|
| 3048101/200 | 2000mm | white |
| 3048101/300 | 3000mm | white |



ENDS AND CLIPS ICY DIY

for blind-milling

| Type | Code | Model | QTY |
|--------|---------|-------|-----|
| Type A | 4006701 | ENDS | 2 |
| Type B | 4006600 | CLIPS | 2 |

ICY DIY

recessed micro profile

ICY is a profile with symmetrical light projection, designed for recessed installation in a blind-milling with a width of 23mm and a depth of 12mm, recommended for use under shelves on retail display units. The shape of the profile, with two protrusions, hides any irregularities in the groove edges (mouse-bite). ICY is supplied with lateral pressure steel springs, allowing the profile to be installed without adhesives and easily removed if necessary. ICY integrates LED module with adhesive base, 10mm wide.

ICY DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|-------------------|--------|--------|-----------|--------------|----------------|-------------|--------|------|------|-------|-----|
| 1575501B/UHE/2000 | UHE10B | 20m | 240 LED/m | 25mm (6 LED) | 19,2W/m @24VDC | warm white | 3000 K | 1820 | 95 | Ra 90 | G |

FLEXYLED D-M

dual colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------|------------|--------|---------------|--------------|----------------|----------------|-------------|------|------|-------|-----|
| 1662101/2000 | UHE10B D-M | 20m | 280+280 LED/m | 25mm (7 LED) | 19,2W/m @24VDC | white D-Motion | 2700-4000 K | 1820 | 95 | Ra 90 | F |




<https://www.domusline.com/warning-dyi-profiles/>



LEDYE DIY PROFILE

extruded aluminium

| Code | Lenght | Finish |
|-------------|--------|------------|
| 4112705/200 | 2000mm | alluminium |
| 4112705/300 | 3000mm | alluminium |

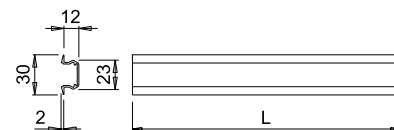

LEDYE DIY DIFFUSER

extruded polycarbonate

| Code | Lenght | Finish |
|-------------|--------|--------|
| 3047701/200 | 2000mm | white |
| 3047701/300 | 3000mm | white |



LEDYE DIY ENDS AND CLIPS

for blind-milling

| Type | Code | Model | QTY |
|--------|---------|-------|-----|
| Type A | 4006510 | ENDS | 2 |
| Type B | 4006600 | CLIPS | 2 |

LEDYE DIY

recessed profile

LEDYE is a profile with symmetrical light projection, designed for recessed installation in a blind-milling with a width of 23mm and a depth of 12mm, recommended for use under shelves on retail display units. The shape of the profile, with two protrusions, hides any irregularities in the groove edges (mouse-bite). LEDYE is supplied with lateral pressure steel springs, allowing the profile to be installed without adhesives and easily removed if necessary. LEDYE integrates LED module with adhesive base, 10mm wide.

LEDYE DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|-------------------|--------|--------|-----------|--------------|----------------|-------------|--------|------|------|-------|-----|
| 1575501B/UHE/2000 | UHE10B | 20m | 240 LED/m | 25mm (6 LED) | 19,2W/m @24VDC | warm white | 3000 K | 1820 | 95 | Ra 90 | G |

FLEXYLED D-M

dual colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------|------------|--------|---------------|--------------|----------------|----------------|-------------|------|------|-------|-----|
| 1662101/2000 | UHE10B D-M | 20m | 280+280 LED/m | 25mm (7 LED) | 19,2W/m @24VDC | white D-Motion | 2700-4000 K | 1820 | 95 | Ra 90 | F |



<https://www.domusline.com/warning-dyi-profiles/>



TWIG DIY PROFILE

extruded aluminium

| Code | Length | Finish |
|-------------|--------|------------|
| 3191605/200 | 2000mm | aluminium |
| 3191605/300 | 3000mm | aluminium |
| 3191632/200 | 2000mm | black matt |
| 3191632/300 | 3000mm | black matt |



TWIG DIY DIFFUSER


extruded polycarbonate

| Code | Model | Finish |
|-------------|--------|--------|
| 3032101/200 | 2000mm | white |
| 3032101/300 | 3000mm | white |



TWIG DIY ENDS

| Code | Model | Finish |
|---------|-------|------------|
| 4005110 | TWIG | aluminium |
| 4005332 | TWIG | black matt |

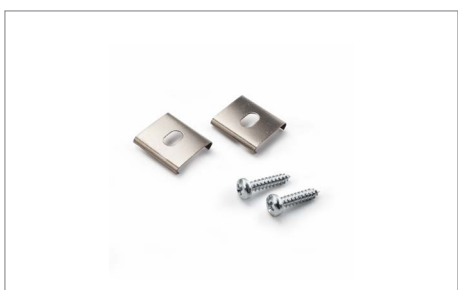

TWIG DIY CLIPS

| Code | Model | QTY |
|---------|-------|-----|
| 4005200 | TWIG | 2 |

TWIG DIY

surface-mounted micro profile

TWIG is a micro profile with symmetrical light projection, designed for surface installation, recommended for under-shelf application. TWIG integrates 6mm and 8mm wide LED modules with adhesive base.

TWIG DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------------|------------|--------|-----------|----------------|----------------|------------------|--------|------|------|-------|-----|
| 1590701B1/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | super warm white | 2700 K | 1420 | 99 | Ra 80 | F |
| 1590701B/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | warm white | 3000 K | 1420 | 99 | Ra 80 | F |
| 1590701N/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | natural white | 4000 K | 1420 | 99 | Ra 80 | F |
| F0298000001 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | super warm white | 2700 K | 1040 | 186 | Ra 85 | C |
| F0298000002 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | warm white | 3000 K | 1040 | 186 | Ra 85 | C |
| F0298000003 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | natural white | 4000 K | 1100 | 196 | Ra 85 | B |
| 1394101B1/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | super warm white | 2700 K | 910 | 91 | Ra 90 | G |
| 1394101B/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | warm white | 3100 K | 940 | 94 | Ra 90 | F |
| 1394101N/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | natural white | 4200 K | 980 | 98 | Ra 90 | F |
| 1557601B1/2000 | HE8B | 20m | 120 LED/m | 50mm (6 LED) | 9,6W/m @24VDC | super warm white | 2700 K | 820 | 85 | Ra 90 | G |
| 1557601B/2000 | HE8B | 20m | 120 LED/m | 50mm (6 LED) | 9,6W/m @24VDC | warm white | 3000 K | 840 | 87 | Ra 90 | G |
| 1557601N/2000 | HE8B | 20m | 120 LED/m | 50mm (6 LED) | 9,6W/m @24VDC | natural white | 4000 K | 880 | 92 | Ra 90 | G |

FLEXYLED D-M

dual colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------|---------------|--------|---------------|------------------|--------------|----------------|-------------|------|------|-------|-----|
| 1552701/2000 | SHE6B D-M | 20m | 168+168 LED/m | 41,7mm (7+7 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 780 | 78 | Ra 90 | G |
| F0218000007 | UHE6B CSP D-M | 20m | 304+304 LED/m | 26,3mm (8+8 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 968 | 97 | Ra 92 | F |

FLEXYLED D-MWA

dual colour wave



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|-------------|------------|--------|---------------|----------------|---------------|---------------------|-------------|------|------|-------|-----|
| F0091000001 | HE6B D-MWA | 10m | 120+120 LED/m | 50mm (6+6 LED) | 9,6W/m @24VDC | white D-Motion Wave | 2700-4000 K | 1054 | 110 | Ra 81 | F |



FLEXYLED D-MWA must be connected to a D-MWA (D-Motion Wave) control system by Domus Line.




<https://www.domusline.com/warning-dyi-profiles/>



TWIG XA DIY PROFILE

extruded aluminium

| Code | Lenght | Finish |
|-------------|--------|------------|
| 4122705/200 | 2000mm | alluminium |
| 4122705/300 | 3000mm | alluminium |



TWIG XA DIY DIFFUSER

extruded polycarbonate

| Code | Lenght | Finish |
|-------------|--------|--------|
| 3058501/200 | 2000mm | white |
| 3058501/300 | 3000mm | white |



TWIG XA DIY ENDS

| Code | Model | QTY |
|---------|---------|-----|
| 4007910 | TWIG XA | 2 |



TWIG XA DIY CLIPS

| Code | Model | QTY |
|---------|---------|-----|
| 4008000 | TWIG XA | 2 |

TWIG XA DIY

surface-mounted profile

TWIG XA is a profile with symmetrical light projection, designed for surface installation, recommended for under-shelf application on the display modules of the retail sector. The luminaire comes with clips that allow for easy installation and removal of the profile if needed. TWIG XA integrates a 6mm and 8mm wide LED modules with adhesive base.

TWIG XA DIY

compatibility with light sources

FLEXYLED

single colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------------|------------|--------|-----------|----------------|----------------|------------------|--------|------|------|-------|-----|
| 1557601B1/2000 | HE8B | 20m | 120 LED/m | 50mm (6 LED) | 9,6W/m @24VDC | super warm white | 2700 K | 820 | 85 | Ra 90 | G |
| 1557601B/2000 | HE8B | 20m | 120 LED/m | 50mm (6 LED) | 9,6W/m @24VDC | warm white | 3000 K | 840 | 87 | Ra 90 | G |
| 1557601N/2000 | HE8B | 20m | 120 LED/m | 50mm (6 LED) | 9,6W/m @24VDC | natural white | 4000 K | 880 | 92 | Ra 90 | G |
| 1590701B1/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | super warm white | 2700 K | 1420 | 99 | Ra 80 | F |
| 1590701B/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | warm white | 3000 K | 1420 | 99 | Ra 80 | F |
| 1590701N/SHE | SHE6B PRO | 10m | 180 LED/m | 33,3mm (6 LED) | 14,4W/m @24VDC | natural white | 4000 K | 1420 | 99 | Ra 80 | F |
| F0298000001 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | super warm white | 2700 K | 1040 | 186 | Ra 85 | C |
| F0298000002 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | warm white | 3000 K | 1040 | 186 | Ra 85 | C |
| F0298000003 | SHEP6B EVO | 10m | 216 LED/m | 41,7mm (9 LED) | 5,6W/m @24VDC | natural white | 4000 K | 1100 | 196 | Ra 85 | B |
| 1394101B1/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | super warm white | 2700 K | 910 | 91 | Ra 90 | G |
| 1394101B/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | warm white | 3100 K | 940 | 94 | Ra 90 | F |
| 1394101N/UHE/2000 | UHE6B | 20m | 280 LED/m | 25mm (7 LED) | 10W/m @24VDC | natural white | 4200 K | 980 | 98 | Ra 90 | F |

FLEXYLED D-M

dual colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------|---------------|--------|---------------|------------------|--------------|----------------|-------------|------|------|-------|-----|
| 1552701/2000 | SHE6B D-M | 20m | 168+168 LED/m | 41,7mm (7+7 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 780 | 78 | Ra 90 | G |
| F0218000007 | UHE6B CSP D-M | 20m | 304+304 LED/m | 26,3mm (8+8 LED) | 10W/m @24VDC | white D-Motion | 2700-4000 K | 968 | 97 | Ra 92 | F |

FLEXYLED D-MWA

dual colour wave



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|-------------|------------|--------|---------------|----------------|---------------|---------------------|-------------|------|------|-------|-----|
| F0091000001 | HE6B D-MWA | 10m | 120+120 LED/m | 50mm (6+6 LED) | 9,6W/m @24VDC | white D-Motion Wave | 2700-4000 K | 1054 | 110 | Ra 81 | F |



FLEXYLED D-MWA must be connected to a D-MWA (D-Motion Wave) control system by Domus Line.




<https://www.domusline.com/warning-dyi-profiles/>



TWIG XO DIY PROFILE

extruded aluminium

| Code | Lenght | Finish |
|-------------|--------|------------|
| 4122605/200 | 2000mm | alluminium |
| 4122605/300 | 3000mm | alluminium |



TWIG XO DIY DIFFUSER

extruded polycarbonate

| Code | Lenght | Finish |
|-------------|--------|--------|
| 3058401/200 | 2000mm | white |
| 3058401/300 | 3000mm | white |



TWIG XO DIY ENDS

| Code | Model | QTY |
|---------|---------|-----|
| 4007810 | TWIG XO | 2 |



TWIG XO DIY CLIPS

| Code | Model | QTY |
|---------|---------|-----|
| 4008000 | TWIG XO | 2 |

TWIG XO DIY

surface-mounted profile

TWIG XO is a profile with symmetrical light projection, designed for surface installation, recommended for under-shelf application on the display modules of the retail sector. The luminaire comes with clips that allow for easy installation and removal of the profile if needed. TWIG XO integrates a 10mm wide LED modules with adhesive base.

TWIG XO DIY

compatibility with light sources

FLEXYLED D-M

dual colour



| Code | Model | Length | LED/m | Divisibility | W/m @V | Temperature | CCT | lm/m | lm/W | CRI | EEC |
|--------------|------------|--------|---------------|----------------|----------------|----------------|-------------|------|------|-------|-----|
| 1662101/2000 | UHE10B D-M | 20m | 280+280 LED/m | 25mm (7+7 LED) | 19,2W/m @24VDC | white D-Motion | 2700-4000 K | 1820 | 95 | Ra 90 | F |



<https://www.domusline.com/warning-dyi-profiles/>

Warranty

Each unit is fully guaranteed for a period of 24 months from the date of delivery. From the warranty are excluded all defects caused by force majeure (lightning, fire, etc..), as well as any damage caused by improper use of equipment. The products must be installed and/or used in accordance with the specifications and instructions given by Domus Line Srl. They must also be installed and/or used in compliance with the provisions governing the installation and/or use of electric material force in the country where the products are installed and/or used. To this end, the buyer expressly releases Domus Line Srl from any responsibility for improper use, failure to comply with safety standards, technical specifications and instructions for use. The products which do not meet the standards and/or specifications in force in the European Union, will only be provided to the buyer that in the order specifies that the destination country does not belong to the European Union and indicating to have exhausted all the controls on compatibility of safety standards in force in the country outside the EU for which they are intended. In the absence of other arrangements for testing of the equipment, the standards established by the CEI (Italian Electrotechnical Committee) are valid. The warranty is void without fail in the event of tampering with the equipment by persons or technicians not specifically authorized by Domus Line Srl. The warranty does not cover normal wear and tear or the consequences of improper installation, nor the failure and/or breaks caused by inexperience and/or neglect.

scan for general conditions of sale ►



Copyright

© 2025 Domus Line®

The brand and name Domus Line are registered trademarks. Domus Line owns brand names and known and widely used logos. The brand names and logos published in this catalogue are registered or in any case subject to the laws on unregistered brand names. All reproduction or distribution by any means: photocopies, internet, microfilm or other means, total or partial, of this catalogue is forbidden without the written permission of Domus Line.

Patents

The patented models, registered and published in this catalogue, are protected and counterfeiting will be prosecuted in accordance with the law.

Disclaimer

This document is distributed as "uncontrolled" and Domus Line reserves the right to change the characteristics of the products to meet any technical or commercial needs, without prior notice. Domus Line verified the data published in this document with the utmost attention. However, because of the variables that exist between the development process and the publication of the catalogue, Domus Line assumes no responsibility for errors, gaps in data, inaccuracies, and so on.



DOMUS LINE

Domus Line srl
Via Maestri del Lavoro, 1
I-33080 Porcia (PN) Italy

domusline.com