



QUICK START GUIDE

GPW50 2.4G Wireless & USB Gaming Controller



WHAT'S IN THE BOX



Gaming Controller



User Manual



2.4G USB
Receiver






USB Type-C
Charging Cable

KNOW YOUR PRODUCT



- 1 Home Button
- 2 Back Button
- 3 Start Button
- 4 Turbo Button
- 5 Clear Button

- 6 LED Indicator
- 7 3D Left Joystick / LSB
- 8 D-Pad
- 9 3D Right Joystick / RSB
- 10 ABXY Button

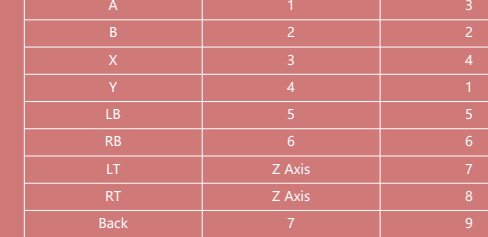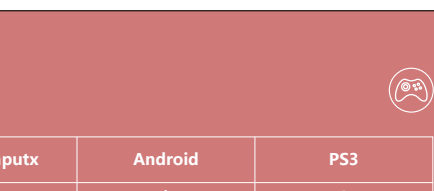

USB Receiver

- 11 Right Button (RB)
- 12 Left Button (LB)
- 13 Right Trigger (RT)
- 14 Left Trigger (LT)
- 15 USB Type-C Port

BUTTON FUNCTIONS




Buttons Function	PC/X-Input	PC/D-Inputs	Android	PS3
A	1	3	A	○
B	2	2	B	×
X	3	4	X	△
Y	4	1	Y	□
LB	5	5	L1	L1
RB	6	6	R1	R1
LT	Z Axis	7	L2	L2
RT	Z Axis	8	R2	R2
Back	7	9	Select	Select
Start	8	10	Start	Start
LSB	9	11	TL	L3
RSB	10	12	TR	R3
Home	Home	13	Mode	PS
Turbo	Turbo	Turbo	Turbo	Turbo
Clear	Clear	Clear	Clear	Clear
D-Pad	POV	POV	X/Y	X/Y
L Joystick	X/Y	X/Y	X/Y	X/Y
R Joystick	X/Y	Z	Z	Z/RZ


WIDE COMPATIBILITY



Note: You can only choose one mode to connect with the Controller.
Can not operate different modes at the same time.



1 2.4GHz Wireless

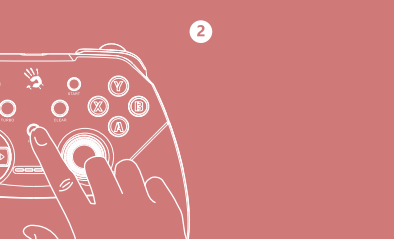


2 USB Wired

CONNECTING 2.4G DEVICE




Power On:
1 Plug in the 2.4G USB Receiver.
2 Press the **[Home]** Button to turn on the Controller.
The LED indicators light up once the Controller is turned on.



Power Off:
Simultaneously press **[LSB+RSB+Back+Start]** Buttons to turn off the Controller.

Note:
You can plug in the cable to charge the Controller if low battery during game playing.



CONNECTING WIRED DEVICE

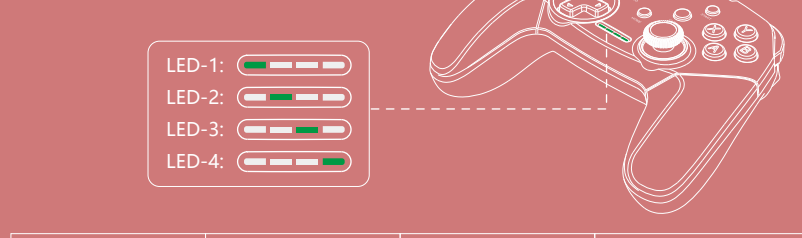

- 1 Plug the cable to the Controller and Computer.
- 2 Press the **[Home]** Button to enter Wired Mode, otherwise, it will be in charging mode.
- 3 The LED indicator lights up once the Controller is connected.

Note:
The Controller will prioritize connecting to 2.4G mode by default. If you plug in the cable and 2.4G Receiver at the same time, the wired function will be just in charging mode.

LED INDICATOR

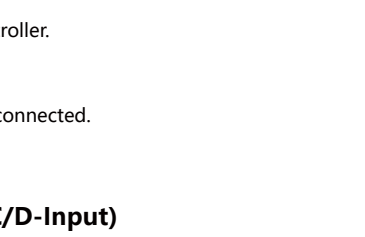

Platform Mode	LED Name	LED Location	How to Connect
PC/X-input	LED-2		Plug and Play
PC/D-input	LED-1 + LED-2		Press Home Button for 5s under X-input Mode
Android/HID	LED-3		Plug and Play
PS3	LED-1		Plug and Play

CONNECT WITH PC PLATFORM



PC/X-Input Mode

- 1 Plug the 2.4G Receiver to the PC.
- 2 Press the **[Home]** Button to turn on the Controller.
- 3 The LED indicators flash when pairing.
- 4 The LED-2 lights up once the Controller is connected.

Mode Exchange (PC/X-Input to PC/D-Input)

- 1 Long press the **[Home]** Button for 3s to turn into PC/D-Input. The LED-1 & LED-2 light up.
- 2 Long press the **[Home]** Button for 3s again to back to PC/X-Input. The LED-2 lights up.


CONNECT WITH ANDROID PLATFORM



- 1 Plug the 2.4G Receiver to the Android Device.
(Smart TV, Set-Top Box, Smart Phone, Tablet based on Android v5.0 and above)

Note: An OTG adaptor will be needed for smartphones and tablets.

- 2 Press the **[Home]** Button to turn on the Controller.
- 3 The LED indicators flash when pairing.
- 4 The LED-3 lights up once the Controller is connected.

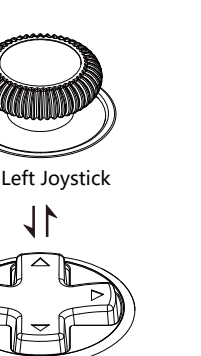


* The OTG Adaptor is for demo only, not included in the package.

CONNECT WITH PLAYSTATION 3




- 1 Plug the 2.4G Receiver to your PS3.
- 2 Press the **[Home]** Button to turn on the Controller.
- 3 The LED indicators flash when pairing.
- 4 The LED-1 lights up once the Controller is connected.

3D JOYSTICK AND D-PAD SWITCHING

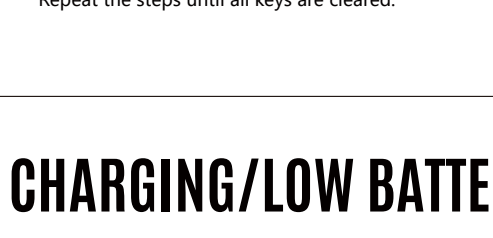

3D Left Joystick



D-Pad

You can exchange the D-Pad function to the 3D Left Joystick function by pressing the **[Start]** Button and **[3D Left Joystick]** Button simultaneously.
Repeat the same steps to return to the default function.

TURBO & CLEAR FUNCTION SETTING




Enable Turbo Setting:

- 1 Press and hold on to one or more buttons from A/B/X/Y/LB/RB/LT/RT, then press the **[Turbo]** Button to save the turbo function.
- 2 You may only set one of the combination buttons at the time, to save multiple Turbo settings, please repeat step 1.
- 3 For example: If you like to set button **[A]** to be Turbo function, first press and hold **[A]** and then press the **[Turbo]** Button to save it. If you like to do the same to combination **[Y]+[B]**, then you need to first press and hold buttons **[Y]+[B]** and then press the **[Turbo]** Button. Repeat this for all the buttons you like to set.

Clear Turbo Setting:

- 1 Press one or more buttons with Turbo Function, then press the **[Clear]** Button to clear the Turbo Setting.
- 2 To clear all the previously set Turbo Settings, you need to clear them one by one. Repeat the steps until all keys are cleared.

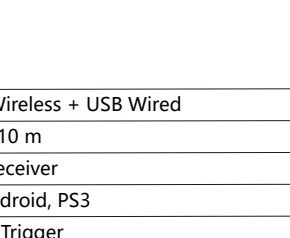

CHARGING/LOW BATTERY INDICATOR



Flashing green light indicates when the battery is below 10%.

Playtime: Up to 13 Hrs


Sleep Mode:

The LED indicator will turn off and the Controller goes to sleep after 5 minutes of no usage.
Note: You can press the **[Home]** Button to wake up the Controller.


SPECIFICATIONS



Connection:	2.4G Wireless + USB Wired
Operating Range:	Up to 10 m
Receiver:	USB Receiver
System Format:	PC, Android, PS3
Trigger Type:	Linear Trigger
Battery Type:	600mAh Lithium Battery
Charging Time:	2.5 Hours
Playtime:	Up to 13 Hrs
Type-C Charging Cable:	100 cm
Size:	155 x 112 x 60 mm
Weight:	188 g
Color:	Sports Red, Sports White



www.Bloody.com



Scan for E-Manual