




ZHIYUN FIVERAY M20C

•EN - Quick Start Guide

EN - Quick Start Guide

Get to Know ZHIYUN FIVERAY M20C

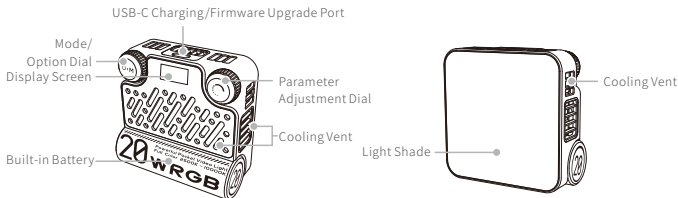

Getting Started



Read Complete
User Guide



Watch Tutorial
Videos



Download the App

Charging

This product adopts a built-in battery. Use provided USB Type-C cable to connect the USB charger (not included in the package) to charge ZHIYUN FIVERAY M20C. It is recommended to use USB chargers that meet the PD protocol.

AC Power
(100-240V)



USB Charger



USB Type-C Cable



How to Use ZHIYUN FIVERAY M20C

Buttons and Dials



Mode/Option Dial:

- Single press+long press: Power on
- Long press: Power off
- Single press: Switch modes
- Double press: Switch to the previous mode
- Three clicks: Reset Bluetooth
- Turn: Switch options (in submenu)




Parameter Adjustment Dial:

- Single press: Quickly adjust the current parameter
- Confirm (submenu)
- Turn: Adjust the current parameter

Operation Instruction


1. CCT Mode Settings

- ① Single/double press mode/option dial to switch to CCT mode.
- ② Turn the mode/option dial for color temperature/ brightness/Green-Magenta adjustment.
- ③ Single press/turn parameter adjustment dial to adjust brightness/color temperature/ Green-Magenta value.

CCT	
BRT:	100%
CCT:	5500k
G/M:	-2


2. HSI Mode Settings

- ① Single/double press mode/option dial to switch to HSI mode.
- ② Turn the mode/option dial to switch to hue/ saturation/intensity options.
- ③ Single press/turn the parameter adjustment dial to set hue/saturation/intensity value.

HSI	
DIM:	100%
HUE:	120°
SAT:	100%


3. RGB Mode Settings


- ① Single/double press mode/option dial to switch to RGB mode.
- ② Turn the mode/option dial to switch to RGB options.
- ③ Single press/turn the parameter adjustment dial to set RGB values.

RGB		
R:	100%	
G:	30%	
B:	50%	▼

4. Light Effect Mode (FX) Settings


- ① Single/double press mode/option dial to switch to light effect mode.
- ② Turn/single press the parameter adjustment dial to set the effect type and turn mode/option dial to switch to brightness/speed/color temperature.
- ③ Single press/turn the parameter adjustment dial to set brightness/speed/color temperature.

FX		
FX:	SOS	
DIM:	100%	
SPD:	5	▼

 The adjustable parameters may vary for different types of light effects, but the operating method remains the same. Above is the SOS light effect as an example.


5. Music Mode Settings

- ① Single/double press mode/option dial to switch to music mode.
- ② Turn mode/option dial to switch to brightness/number of colors/colors options.
- ③ Single press/turn the parameter adjustment dial to set the brightness value/number of colors/colors under music mode.

MUSIC		
DIM:	100%	
CLN:	2	
CL 1:	120°	▼

6. Menu Settings

- ① Single/double press mode/option dial to switch to menu settings.
- ② Turn the mode/option dial to switch to language/Bluetooth reset settings.
- ③ Turn the parameter adjustment dial to set the language/Bluetooth reset.

MENU		
Language:	English	
BT Rst:	No	
Version:	V1.58	

Disclaimer and Warnings

Thank you for purchasing this product. The information contains herein affects your safety, legitimate rights and obligation. Please read this instruction carefully to ensure proper configuration before use. Failure to read and follow this instruction and warnings herein may result in serious injury to you or bystanders, or damage to your device or property. Guilin Zhishen Information Technology Co., Ltd (hereinafter referred to as "ZHIYUN") reserves all rights for final explanation of this instruction and other documents related to this product. The information is subject to update without notice. Please visit www.zhiyun-tech.com to obtain the latest product information.

By using this product, you hereby signify that you have read this document carefully and that you understand and agree to abide by the terms and conditions herein. You agree that you are solely responsible for your own conduct while using this product, and for any consequences thereof. You agree to use this product only for purposes that are proper and in accordance with all terms, precautions, practices, policies and guidelines ZHIYUN has made and may make available.

ZHIYUN accepts no liability for damage, injury or any legal responsibility incurred directly or indirectly from the use of this product. Users shall observe safe and lawful practices including, but not limited to, those set forth herein.

ZHIYUN™ is the trademark of Guilin Zhishen Information Technology Co., Ltd and its affiliates. All product names or trademarks referred to herein are trademarks or registered trademarks of their respective holders.

Reading Tips

Legends:  Hints and Tips









 Important

Safe Operation Instructions

Read the ENTIRE User Guide to become familiar with the features of this product before operating. Failure to operate the product correctly can result in damage to the product or personal property and cause serious injury. This is a sophisticated product. It must be operated with caution and common sense and requires some basic mechanical ability. Failure to operate this product in a safe and responsible manner could result in injury or damage to the product or other property. This product is not intended for use by children without direct adult supervision. DO NOT use with incompatible components or in any way otherwise as mentioned or instructed in the product

documents provided by ZHIYUN. The safety guidelines herein contain instructions for safety, operation and maintenance. It is essential to read and follow all of the instructions and warnings in the User Guide, prior to assembly, setup or use, in order to operate the product correctly and avoid damage or serious injury.

WARNING

-  This product is not waterproof. Prevent contact with any kind of liquid or cleaner with the product.
Never use the product in the rain or a humid environment.
-  If water enters the product during use, please stop using it immediately and contact our company or authorized maintenance personnel for the repair, and continue using it only after the repair is completed.
-  Do not expose this product to corrosive chemicals, inflammable and explosive materials.
-  Do not touch heat-generating components when using the product to avoid getting burnt.
-  Do not wrap or block the fan with foreign objects to avoid affecting the cooling performance of the product.
-  Do not look directly at the glowing LED chips to avoid eyesight damage.
-  Do not place or use the product in environments with temperatures over 40°C.
-  Battery Safety Guidelines:
 - ① Never use non-ZHIYUN batteries. If replacement or backup is needed, please purchase new batteries from ZHIYUN's official website or authorized channels. ZHIYUN takes no responsibility for any damage caused by non-ZHIYUN batteries.
 - ② Never use or charge swollen, leaky, or damaged batteries. If your batteries are abnormal, contact ZHIYUN or a ZHIYUN authorized dealer for further assistance.
 - ③ Do not leave the battery unused for too long after it has been completely discharged to prevent over-discharge of battery which may result in battery damage and permanent failure.

BE CAREFUL

1. This product is a high-precision control device. Damage may be caused to the product if dropped or subject to external force, and this may result in malfunction.
 2. When storing or using products with rabbit cages, please stay away from items that are easy to be magnetized: such as floppy disks, bank cards, ID cards, forbidden cards, etc.
 3. Please keep your hands dry while using the product and use soft dry cloth for cleaning.
- zhiyun-tech.com

4. Disconnect the external power supply when it is not in use or does not need to be charged.
5. Please do not place any other objects on top of this product to avoid damage to this product.
6. Keep this product out of the reach of children.
7. Protect the product from dust and sand during use.
8. Before storing this product, please make sure it has been completely cooled, and please store it in a dry and ventilated place.
9. Do not disassemble this product on your own. In the event of malfunctions, it should be repaired by ZHIYUN or authorized maintenance personnel.

Warranty Period

1. Customers are entitled to replacement or free repair service in case of quality deficits found in the product within 15 days upon receipt of the product.
2. Customers are entitled to free repair service from ZHIYUN for any product proven defective in material or workmanship that results in product failure during normal consumer usage and conditions within the valid warranty period, which is 12 months counting from the date of selling. However, warranty period varies by product component and country of purchase. Please contact our after-sales service team on ZHIYUN official website or your place of purchase for detailed warranty information.

Warranty Exclusions

1. Products subjected to unauthorized repair, misuse, collision, neglect, mishandling, soaking, accident, and unauthorized alteration.
2. Products subjected to improper use or whose labels or security tags have been torn off or altered.
3. Products whose warranty has expired.
4. Products damaged due to force majeure, such as fire, flood, lightning, etc.

Warranty Claim Procedure

1. If failure or any problem occurs to your product after purchase, please contact a local agent for assistance, or you can always contact ZHIYUN's customer service through email at info@zhiyun-tech.com or website at www.zhiyun-tech.com.
2. Your local agent or ZHIYUN's customer service will guide you through the whole service procedure regarding any product issue or problem you have encountered. ZHIYUN reserves the right to reexamine damaged or returned products.

Scan the QR code below to know more about our products.



Official website



Facebook
(Zhiyun Tech)



Facebook
(Zhiyun Support)



Instagram



YouTube

Quality Certificate

Please download the latest version from www.zhiyun-tech.com

This document is subject to change without notice.

ZHIYUN™ are the trademark of ZHISHEN.

Copyright © 2023 ZHISHEN. All rights reserved.

Tel: +86 400 900 6868

USA Hotline: +1 808-319-6137, 9:00-18:00 GMT-7, Mon-Fri

Europe Hotline: +49 (0)6101 8132 180, 10:00-17:00 GMT+1, Mon-Fri

Email: info@zhiyun-tech.com

Website: www.zhiyun-tech.com

Address: 09 Huangtong Road, Tieshan Industrial Zone, Qixing District, Guilin, 541004, Guangxi, China.

取得審驗證明之低功率射頻器材，非經核准，公司、商號或使用者均不得擅自變更頻率、加大功率或變更原設計之特性及功能。低功率射頻器材之使用不得影響飛航安全及干擾合法通信；經發現有干擾現象時，應立即停用，並改善至無干擾時方得繼續使用。前述合法通信，指依電信管理法規定作業之無線電通信。低功率射頻器材須忍受合法通信或工業、科學及醫療用電波輻射性電機設備之干擾。

Warranty card

用户信息 \ Custom information

用户姓名\Customer Name:

联系电话>Contact No:

通讯地址\Address:

销售信息 \ Sales Information

销售日期\Sales Date:

机身序列号\Prod. Serial No:

经销商名称\Dealer:

经销商联系电话>Contact No:

第一次维修记录 \#1 Maintenance Record

送修日期\Service Date:

维修员签名\Signature of Repairman:

故障原因\Cause of Problem:

处理结果\Service Result: ☐ 修好\Solved ☐ 未修好\Unsolved ☐ 退换\Refunded (Replaced)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help

FCC Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Hereby, [Guilin Zhishen Information Technology Co., Ltd.] declares that the radio equipment type [PLM103] is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <https://www.zhiyun-tech.com/compliances>.

- English:

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device."

- French:"

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil n' doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement."

IC Radiation Exposure Statement:

This equipment complies with IC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20cm between the radiator & your body.

Déclaration d'exposition au rayonnement IC:

Cet équipement est conforme aux limites d'exposition au rayonnement IC fixées pour un

Environnement non contrôlé. Cet équipement doit être installé et exploité Avec une distance minimale de 20cm entre le radiateur et votre corps.

zhiyun-tech.com