



# J26 BLUETOOTH WIRELESS RECEIVER

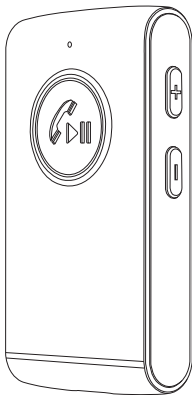

**User Manual**

## Product Diagram

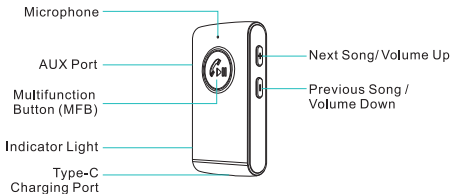

## Operations:

Function	Operation
Power On/Off	Long press the "MFB" for 3 seconds
Play/Pause/Answer/Hang up	Press the "MFB" once
Reject a call	Long press the "MFB" for 2 seconds
Redial the last number	Press the "MFB" twice
Volume Up/Down	Click "+" / "-" to increase and subtract
Next/Previous Song	Long press the "+" / "-" button

## LED Indicator:

Power On:	Red/blue lights flashed alternately
Pairing:	Red/blue lights flashed alternately
Connected:	Blue light stays on for 1 minute then off
Battery Low:	Flashing red light
Charging:	Red light stays on
Charging finished:	Red light extinguish
Power Off:	Red/blue lights go out

## Charge the device

1. Please **fully** charge the product before first use, the indicator will stay red during charging, and turn off when finished.
2. When the device is in **low power state**, the indicator **light will flash red**, please charge it in time with DC 5V power supply input only. (Do not use power supply higher than 5V)


### Note:

Charge the product at **least once every 3 months** when not using for a long time.


## How To Connect?

### Pair with your first Bluetooth device.


1. Power on the receiver, the indicator light flashes red and blue alternant, which means it's in pairing mode.



2.Connect the product to the AUX INPUT port of your desired source, like headphone/home speaker or car stereo system with provided 3.5mm audio cable, or plug your old 3.5mm wired earphone into the device.




3.Turn on the Bluetooth function of your smart device, search for "J26" and connect.



4.Now you can enjoy music wirelessly or answer hands-free calls.

## Pair with your second Bluetooth device.

1. After successfully pairing with the first smartphone, turn off the Bluetooth function of the first smartphone, and the product will enter the pairing mode again.
2. Turn on the Bluetooth function of the second smartphone, search for "J26" and connect.



3. Turn on the Bluetooth function of the first smartphone, select "J26" in your pairing history.
4. Now two smartphones have connected to the receiver at the same time.

## Auto-Connect:

The product will automatically pair with the last connected device, when next turned on. (Before turning on the Bluetooth receiver, turn on the Bluetooth feature of your smart device.)

## Auto Power Off:

The product will power off automatically if not paired with any device in 5 minutes.

## Trouble Shooting:

**Q1: The product can't pair with your Bluetooth enabled phone, MP3, etc.**

1. Please make sure you have powered on the receiver, and the indicator light flashes red and blue alternant.
2. Clear the paring list of your Bluetooth enabled phone, MP3, etc. then try again.

**Q2: The Bluetooth range or the sound quality is not good.**

Bluetooth signal can be blocked by surrounding objects and reduce the audio quality, please put it in the right position without barrier between adapter and your phone (or other devices).

## Features:

1. Pair with mobile phone/MP3/Tablet, etc. and turn your old car stereo/home stereo/3.5mm wired headphones into wireless.
2. Automatically connects to the last connected device.
3. Keep pairing with 2 Bluetooth devices at the same time.
4. The built-in microphone can be used to answer hands-free calls.
5. The latest noise cancellation technology provides excellent call quality.
6. The built-in battery has a long battery life of up to 16 hours.
7. Compatible with iOS and Android devices.
8. Bluetooth V5.3 with low power consumption.

## Packing List

- Bluetooth Receiver \* 1
- 3.5mm Male to Male Connector \* 1
- 3.5mm Audio Cable \* 1
- Type-C Charging Cable \* 1
- User Manual \* 1

## Specifications:

Bluetooth Version: 5.3

Frequency Range: 2.4GHz

Output Power Category: Class2

Bluetooth Mode: HFP/HSP/A2DP/AVRCP

Bluetooth Range: up to 33feet

Battery: 250mAh

Working Current: 15~20mA

Charge Voltage: DC 5.0V

Charge Current: 100mA

## FCC Compliance Statement:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

## RF Exposure Compliance Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

## CORRECT DISPOSAL OF THIS PRODUCT



(Waste Electrical & Electronic Equipment)

This marking shown on the product or its literature, indicates that it should not be disposed with other household wastes at the end of its working life.

To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it responsibly to promote the sustainable reuse of material resources.

Household user should contact either the retailer where they purchased this product or their local government office for details of where and how they can take this item for environmentally safe recycling.

Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.