



ADUROS MART ERIA

USER MANUAL WIRELESS DIMMING SWITCH




The Eria wireless dimming switch is a battery-powered dimmer for ZigBee Light link and 3.0 certified lights.



Important note!
Can be used without an Eria control station but offers more options in combination with the ERIA control station or with a supported smarhome hub.


1. Pull off the lid sticking out of the battery compartment.



For more information on installation and use please visit www.adurosmart.com/remote.

2. Connect without a hub

Switch on the ZigBee lamp which you want to control.



3. Touch the lamp cover with the remote and keep pressing the ON button. The Eria soft white lamp will flash 2 times when it initiates the touchlink and a color lamp will flash green once. Make sure you keep the ON button pressed until a successful touch-link is confirmed as illustrated at step 4.



4. If the touchlink is successful the soft white lamp will flash slowly 2 times, if you have touchlinked the color lamp successful then it will turn green.

DIMMING BULB



Flash 2 times

COLOR LAMP



Green light

Connect with the ERIA hub

- 1A. Download the Adurosmart App from the Apple App Store or from Google Play or go to <http://adurosmart.com/adurosmart-app/>

Android





IOS





- 1B. If you have a **third party ZigBee compatible hub** then **proceed to step 9**.

2. Open the Adurosmart Eria APP.





3. On the bottom right corner press on "Settings".

4. Select "Devices".

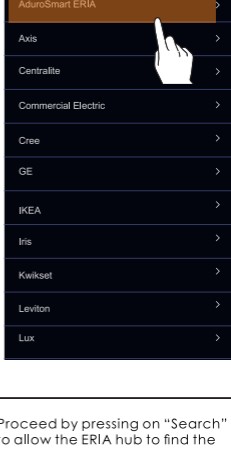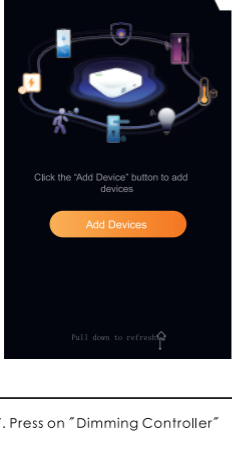



5. On the top right corner press on the "+" symbol then press on "Add device".

6. Press on "Brands" and then select "AduroSmart ERIA".

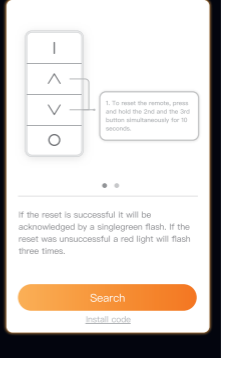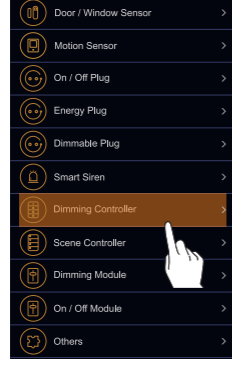

7. Press on "Dimming Controller"


8. Proceed by pressing on "Search" to allow the ERIA hub to find the remote, the LED indicator on the hub will **flash green** this indicates that the hub is searching for new devices.

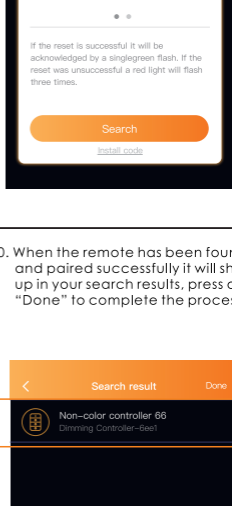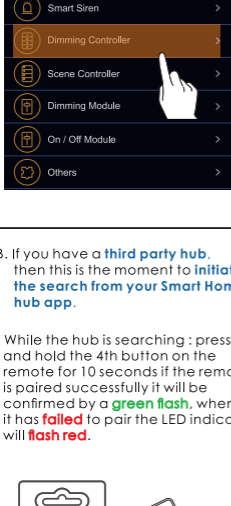

- 8B. If you have a **third party hub**, then this is the moment to **initiate the search from your Smart Home hub app**.

10. When the remote has been found and paired successfully it will show up in your search results, press on "Done" to complete the process.

9. While the hub is searching : press and hold the 4th button on the remote for 10 seconds if the remote is paired successfully it will be confirmed by a **green flash**, when it has **failed** to pair the LED indicator will **flash red**.



11. Troubleshoot

If you have followed the pairing instructions but you are still not able to connect your device then follow below instructions to reset the controller.

To reset the remote: press and hold the 2nd and 3rd button on the remote simultaneously for 10 seconds a successful reset will be confirmed by a **green flash** from the LED indicator, failed reset will be indicated by a **red flash**.



10 seconds

NEED HELP? CALL US

For troubleshoots, instruction video's or more information please visit us at www.adurosmart.com/faq

Chat with one of our support agents at www.adurosmart.com

The Netherlands: +31 523687532
Support@Adurosmart.eu

