
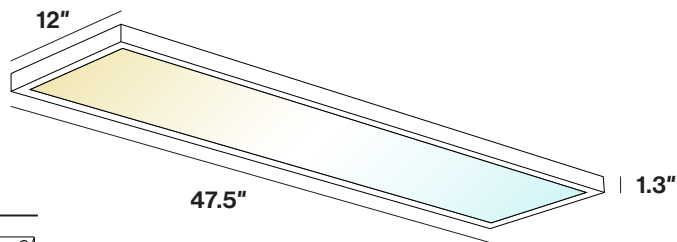


1X4 SELECTABLE CEILING PANEL

Installation Manual

COMPONENTS

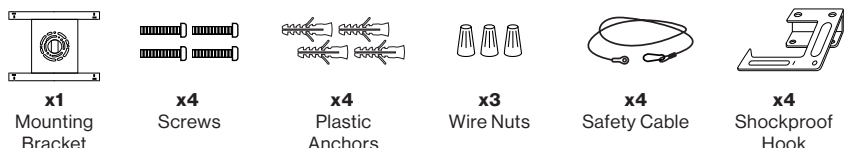


EASY INSTALLATION




Turn Power OFF

1. Turn off power at fuse or circuit breaker before installing.




- 2a. Use screws to attach mounting bracket to existing junction box


-Use with 2.1", 2.75", or 3.5" junction box



- 2b. If no junction box is present, attach mounting bracket to ceiling using (4) plastic anchors and screws




3. Clip safety cable from light to mounting bracket for added security




4. Use switches to choose CCT and brightness settings:

Brightness	CCT
-30W	-3500K
-40W	-4000K
-46W	-5000K



5. Connect supply wires to fixture wires

- Black to Black (Live)
- White to White (Neutral)
- Green to Green (Ground)



6. Hold panel flush against ceiling, then slide and lock into place



Turn Power ON

7. Turn on circuit breaker and test light

SPECIFICATIONS

Voltage	120VAC
Selectable Wattage	30W/40W/46W
Moisture Rating	Damp
Housing Material	Aluminum+Galvanized Iron Plate
Weight	5.5 lbs
Warranty	7 Years

WARNING

To reduce the risk of fire, electric shock, or physical injury:

- This product should be installed by a person familiar with the construction and operation of the product and the hazards involved. Safety eyeglasses and gloves are recommended.
- Check for shipping damage before installing. If the product is damaged, do not use it.
- Turn off the switch and circuit breaker before installing this fixture.
- Proper grounding is required to ensure safety.
- Clean the fixture regularly to ensure proper operation. Do not clean with harsh solvents.
- Use safety precautions and abide by regional and local laws or regulations.

FCC NOTES

- This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.
- Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
 - Reorient or relocate the receiving antenna.
 - Increase the separation between the equipment and receiver.
 - Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 - Consult the dealer or an experienced radio/TV technician for help.