



POWER A5
BRAKE FENDER REPLACEMENT PROCEDURES
PART # W13113202011

Required Tools: (Not included)


- A. Phillips screwdriver
- B. Blade or knife
- C. 3 mm Allen wrench
- D. 5 mm Allen wrench
- E. Small flat screwdriver

⚠ WARNING

⚠ CAUTION: To avoid potential shock or other injury, turn power switch OFF and disconnect charger before conducting any assembly or maintenance procedures. Failure to follow these steps in the correct order may cause irreparable damage.


Step 1

Using a Phillips screwdriver, remove four (4) screws from the controller cover under the deck.

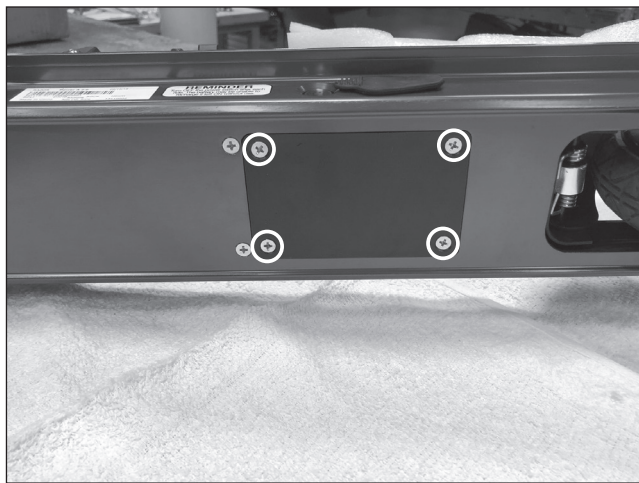

Step 2

Locate and disconnect two (2) motor connectors from controller.

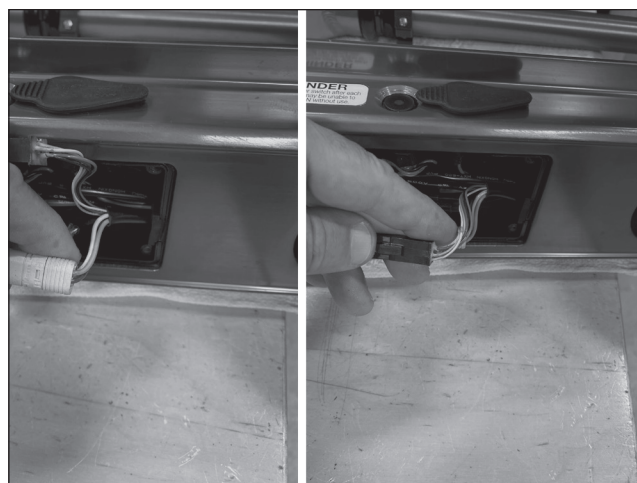

Step 3

Disconnect brake cable from controller.




Step 4

Using a blade or knife, cut the grip tape shown in picture. Peel the grip tape to the side.



Step 5

Using a 3 mm Allen wrench, remove two (2) screws from the brake fender.

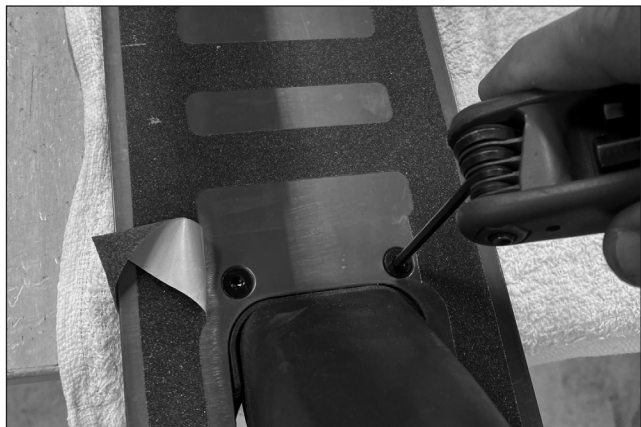

Step 6

Using a 5 mm Allen wrench, remove the bolts that hold the wheel in place.



Step 7

Using a small flat screwdriver, remove the grommet at the back from inside the controller compartment.



Step 8

Once you remove the grommet, slide rear wheel and fender off from the unit being careful not to pinch the wires.



Step 9

Reverse the steps.

ATTENTION: Charge battery 10 hours before using.