



**SUBMITTAL DATA - INDOOR UNIT**  
**LXG FCCMD060100P64**  
**LCAC DUCT TYPE EVAPORATOR**

Job: \_\_\_\_\_  
 Location: \_\_\_\_\_  
 Schedule No.: \_\_\_\_\_  
 System Designation: \_\_\_\_\_

Engineer: \_\_\_\_\_  
 Architect: \_\_\_\_\_  
 Date: \_\_\_\_\_

**FEATURES**

- Weekly Timer Wired control included
- Auto Restart
- Wireless Remote Included
- Follow Me function

**SPECIFICATIONS**

**PERFORMANCE**

Cooling Capacity (Btu/h)		60,000
EER(W/W)		2.6
SEER(BTUH/W)		/
Heating Capacity (Btu/h)		/
HSPF(BTUH/W)		/
Airflow (CFM)	High	1532
	Medium	1283
	Low	1109
Sound Pressure (dBA)	High	52.4
	Medium	49.7
	Low	46.9
External Static Rated Pressure (Pa)		50
External Static Pressure Range (Pa)		0 - 160

**ELECTRICAL DATA**

Power Supply (V/Hz/φ)		220-230/60/1
Max Current (A)	with 3 phase ODU	34.6
	with 1 phase ODU	23.4
Rated Current (A)	Cooling	3.3
	Heating	/


**DIMENSIONS**

Unit Dimensions (in)	Height	11.8
	Width	47.2
	Depth	34.4
Liquid Pipe Connection (in)		3/8"
Gas Pipe Connection (in)		3/4"
Shipping Weight (lb)		127.4
Net Weight (lb)		107.4

**PRODUCT WARRANTY**

5 Year Limited Warranty\*

**Model No.: LXG FCCMD060100P64**  
**CAT No.: Y5679**

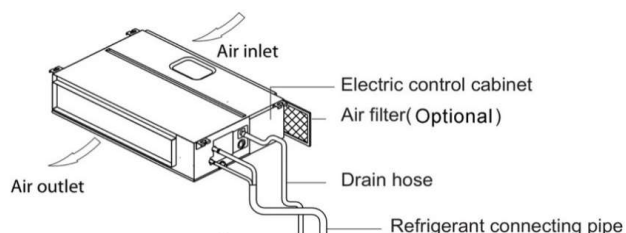

**NOTES**

Cooling and Heating Capacity data is rated at the following conditions:  
 Cooling: 80°FDB / 67°FWB Indoor, 95°FDB/ 75°FWB Outdoor  
 Heating: 68°FDB / 59°FWB Indoor, 45°FDB/ 43°FWB Outdoor

**OPTIONAL ACCESORIES**



**NOTE** – Due to Lennox' ongoing commitment to quality, Specifications, Ratings, and Dimensions are subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency



# SUBMITTAL DATA - INDOOR UNIT LXG FCCMD060100P64 LCAC DUCT TYPE EVAPORATOR

## WIRELESS CONTROLLER SPECIFICATIONS

### 21F34 (RG66A1/BGEF)


Power Supply	2 AAA Batteries (Included)
Setpoint Range	62°F(17°C) - 86°F(30°C)
Effective Receiving Range	26 ft.(8m)

## WIRED CONTROLLER SPECIFICATIONS

### (KJR-120G2/TFBG-E-02)

Power Supply	DC 12V, Supplied by IDU
Setpoint Range	62°F(17°C) - 86°F(30°C)
Effective Receiving Range	65 ft.(20m)


## WIRELESS CONTROLLER DISPLAY

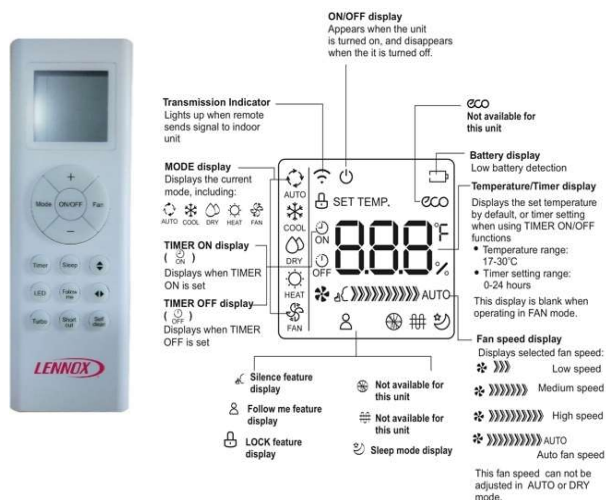

## WIRED CONTROLLER DISPLAY



## WIRED CONTROLLER FUNCTION DISPLAY

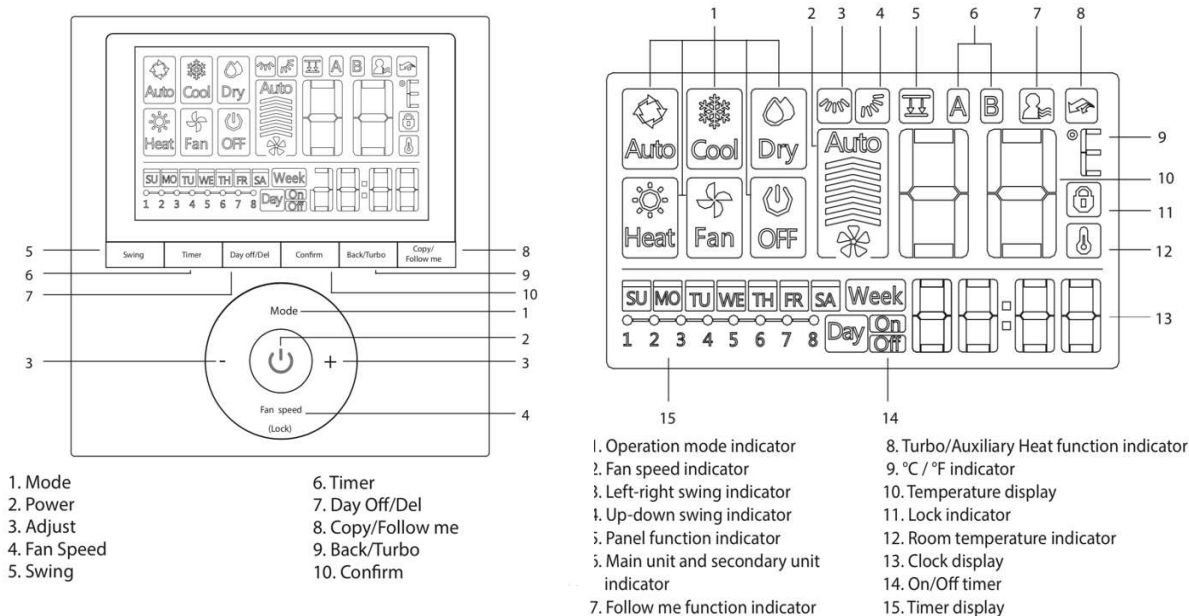


**NOTE** – Due to Lennox' ongoing commitment to quality, Specifications, Ratings, and Dimensions are subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency.




**SUBMITTAL DATA - INDOOR UNIT**  
**LXG FCCMD060100P64**  
**LCAC DUCT TYPE EVAPORATOR**

**DIMENSIONAL DRAWINGS - INCHES (MM)**


Air outlet dimensions

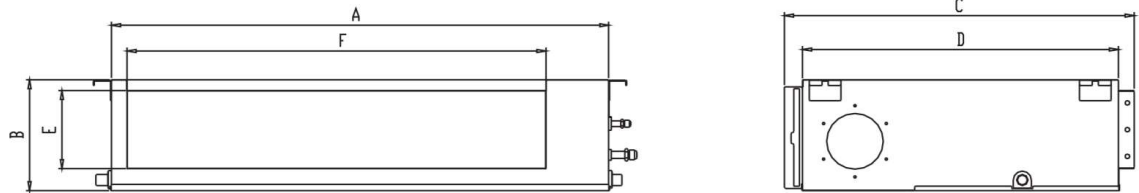

Air inlet dimensions

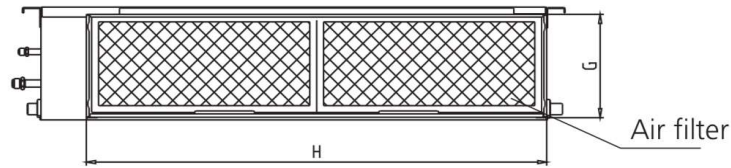

Descending ventilation opening and mounted hook

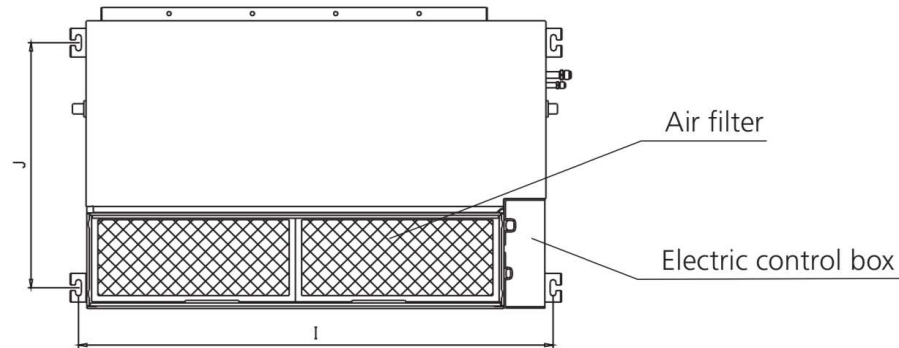

IDU	Outline dimension				Air outlet opening size		Air return opening size		Size of mounted lug	
	A	B	C	D	E	F	G	H	I	J
<b>Inch</b>	47.2	11.8	34.4	31.5	8.9	41.1	11	43.3	48.8	27.4
<b>mm</b>	1200	300	874	800	227	1044	280	1101	1240	697

**NOTE** – Due to Lennox' ongoing commitment to quality, Specifications, Ratings, and Dimensions are subject to change without notice and without incurring liability. Improper installation, adjustment, alteration, service or maintenance can cause property damage or personal injury. Installation and service must be performed by a qualified installer and servicing agency