



# XOS2300iD

## 2300 Watt DUAL FUEL Inverter Generator With Fuel Sense Technology

- EPA Certified
- ANSI/PGMA G300 Compliant with CO Sensor Shutdown
- Light Weight Technology: Just 40.8 lbs.
- A-iPower dual fuel generator offers the choice of operating with gasoline or propane or both with **Fuel Sense Technology**
- 0.9 Gallon Tank, up to 9.0 Hour Runtime
- 24.0 Hour Runtime with 20 lbs. Propane Cylinder
- **Extended 33.0 Hour Runtime (No Refueling) with Fuel Sense Technology**
- 2300 Starting / 1800 Running Watts (Gas)
- 2000 Starting / 1600 Running Watts (Propane)
- 80cc Recoil Start Engine
- Pure Sine Wave with <3% THD with All Copper Alternator
- Parallel Ready (Parallel Cables Included)
- As low as 61dB Noise Level
- Multi-Featured Data Center
- Illuminated Control Panel
- Integrated Wheel Kit



DIGITAL INVERTER  
TECHNOLOGY



# XOS2300iD

0.9-Gal Tank with  
Up To 9.0 Hour Runtime (Gas)



Total Harmonic  
Distortion < 3% THD



Integrated  
LED Light



Telescopic  
Handle



Integrated  
Handle



Quiet Tone  
Muffler



Recoil  
Start



3.0" Flat  
Free Wheel



80cc, OHV,  
4 Cycle Engine





# XOS2300iD

Data Center Displays;  
Voltage, Frequency, Hours,  
Power, Fuel Bar,  
Output Ready/Overload/Low Oil indicators  
Low Idle and Reset Buttons


Parallel  
Capability



DC Outlet:  
(2) 5VDC USB



CO Sensor:  
Auto Shutdown

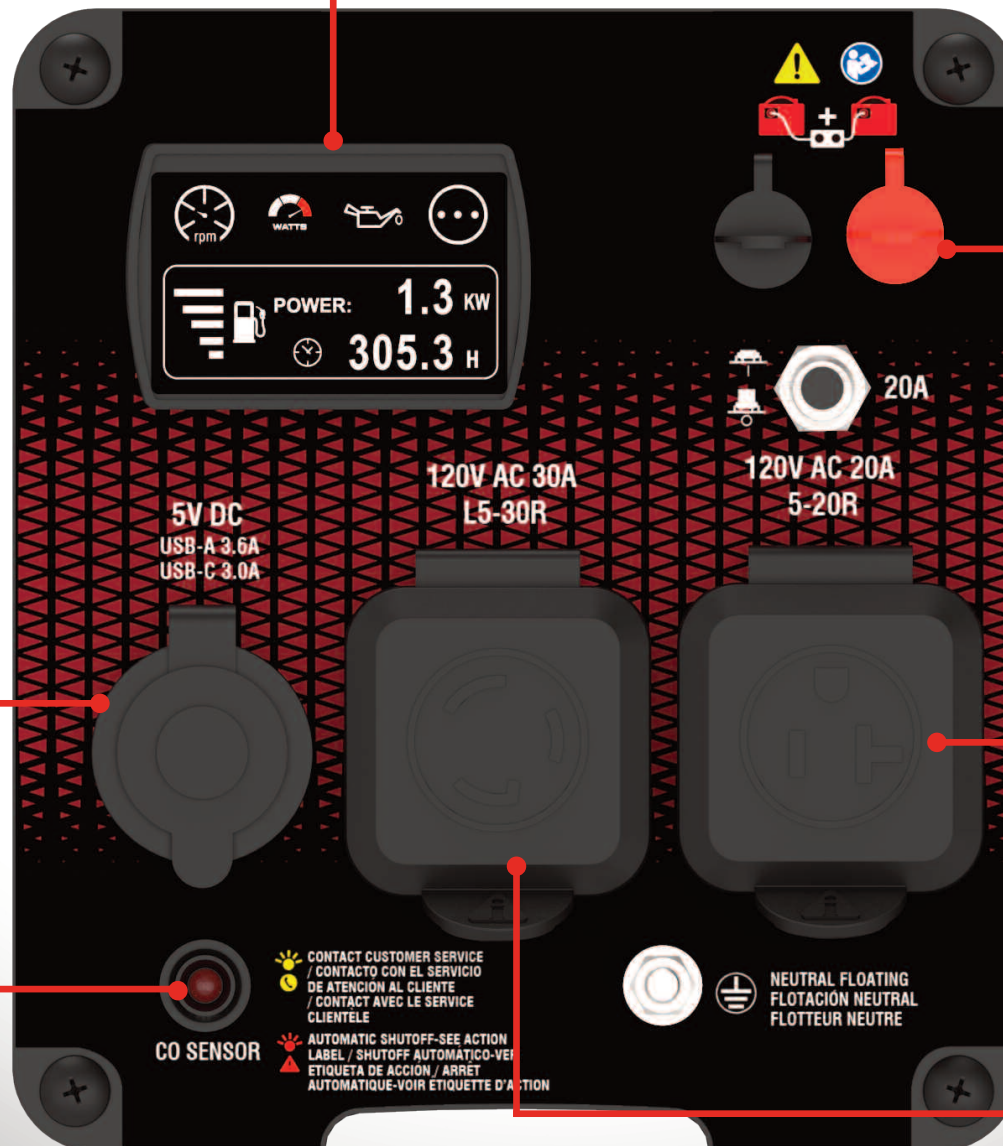

AC Outlet: (1)  
5-20R, 20A, 120VAC



AC Outlet: (1)  
L5-30R, 30A, 120VAC



## XOS2300iD - Ultra-Light Dual Fuel

Starting/Running Watts (Gas)	2300 / 1800
Starting/Running Watts (Propane)	2000 / 1600
Certifications/Compliance	EPA, ANSI / PGMA G300
Carbon Monoxide (CO) Monitor/Shut-Off System	Yes
Fuel Sense Technology	Yes
AC Voltage	120V
Rated Speed/Frequency	Variable / 60Hz
Total Harmonic Distortion (THD)	<3%
Grounding System	Neutral Floating
Engine Type	Single Cylinder 80cc - 4 Stroke OHV
Starting System	Recoil Start
Low Oil Shutdown	Yes
Fuel Type	Gasoline - Propane
Alternator Type	Permanent Magnet - Inverter
Tank (Gas)	0.9 Gal
Runtime @25% Load (Gas)	Up to 9.0 Hour
Runtime @25% Load (Propane - 20lbs Cylinder)	Up to 24.0 Hour
Fuel Sense Runtime @25% Load (Gas + Propane)	Up to 33.0 Hour
Noise Level (dB)	As Low As 61
Data Center	Yes
Wheel Kit	Integrated with Telescopic Handle
AC Outlets	1x5-20R (20A, 120V) - 1xL5-30R (30A, 120V)
DC Outlets/Inlets	1xUSB-A 3.6A (5VDC) - 1xUSB-C 3.0A (5VDC)
Parallel Ready	Yes (Parallel Cables Included)
Illuminated Control Panel	Yes
Included	Oil Bottle - Funnel - Tool Kit - 30A RV Adaptor - LP Regulator - Parallel Cables - Manual - Quick Start Guide
Warranty	3 Year
Carton LxWxH (inch / mm)	20.7 x 12.0 x 20.7 in / 525 x 305 x 525 mm
Unit Weight	40.8 lbs / 18.5 kg
Shipping Weight	47.4 lbs / 21.5 kg
UPC	850055834194



Integrated  
LED Light



# XOS2300iD



## FULL PARALLEL INTEGRATION\*

**DOUBLES YOUR POWER  
ONCE CONNECTED**

Read manual for full instructions.

**NOTE:** Maximum output is obtained from the L5-30R receptacle

\* Requires second XOS2300iD Series inverter - sold separately.



[www.a-ipower.com](http://www.a-ipower.com)  
10887 Commerce Way, Unit A  
Fontana CA 92337- 8240



**Phone:** 855-888-3598  
**Fax:** 909-930-3719  
[support@a-ipower.com](mailto:support@a-ipower.com)  
Mon-Fri 7:30 AM to 5:30 PM CT

