

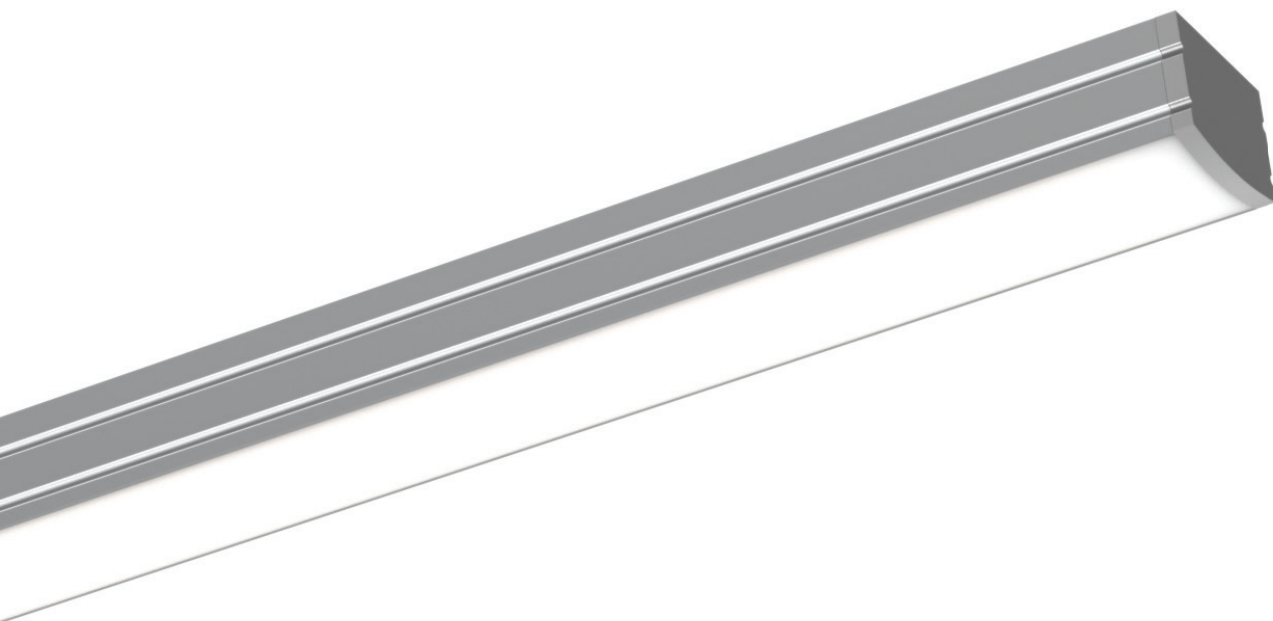


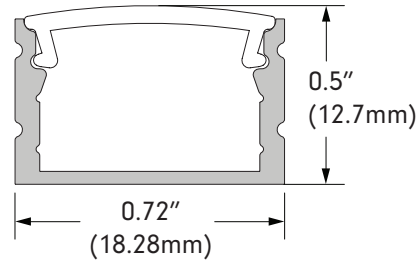

Profile & Dimensions



Available TivoTape Options - Indoor

DEFINE

SB
HO
LB

ELITE

SB
HO

ELITE+

Standard
Pro
Vision
Flow

FUSE24

RGB
RGBW

FUSE12

PiXEL RGB

Available TivoTape Options - Outdoor

DEFINE

SB
HO
LB

FUSE24

RGB

FUSE12

PiXEL RGB

Ordering Information

**MOFT-CHAN-SLV-6.5**

Anodized Aluminum Extrusion,
available in 6.5' lengths

**MOFT-LNS-XXX-6.5**

XXX = **OPL** (Opal), **CLR**
(Clear), **DIF** (Diffused)
PC lens, sold in 6.5' lengths

**MOFT-LNS-SIL-XX**

XX = **50** (50'), **100** (100')
Silicone lens, sold by roll

**MOFT-CLP-SLV**

Metal clip


**MOFT-EC-01**

Solid End Cap

**MOFT-EC-02**


Powerfeed End Cap

Photometrics (based on 30K HO ELITE)




MOFETT WITH CLEAR LENS

Lumens per foot: 364.83
Watts per foot: 4
CRI : 94.8
Peak Candela: 163



MOFETT WITH DIFFUSED LENS


Lumens per foot: 299.44
Watts per foot: 4
CRI : 95.4
Peak Candela: 111.34



MOFETT WITH OPAL LENS

Lumens per foot: 157.34
Watts per foot: 4
CRI : 97.6
Peak Candela: 53.14


Diode Visibility




Opal lens



Clear lens



Diffused lens



Silicone lens

