

PROAIM Ballpro Camera Suction Car Mount w Vibration Isolator (CM-BLPR-01)

Assembly Manual




■ What's In The Box

Please inspect the contents of your shipped package to ensure you have received everything that is listed below.



Suction Car Mount

Bolt Size
3/8", 1/4"

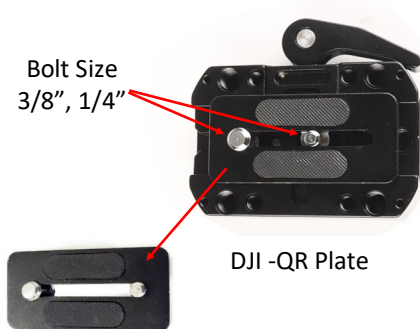

DJI -QR Plate



P-QRG



1 x Allen Key
(Size: 4mm, 2.5mm)



2 x Allen Bolts
(Size: 1/4"-20 x 1-1/4" & 2.5 x 6)



4 x Yellow Dust Covers



Foam With Bag Packing

All rights reserved.

No part of this document may be reproduced, stored in a retrieval system, or transmitted by any form or by any means, electronic, mechanical, photo-copying, recording, or otherwise, except as may be expressly permitted by the applicable copyright statutes or in writing by the Publisher.

Ballpro Camera Setup

- Remove the yellow dust cover of Suction Car Mount.



- Similarly, remove rest of the yellow dust covers of the suction mount, as shown in the image.



- Place your first suction cup in the selected Position from where you want to shoot.



- Press down the suction cup and keep pushing the pump to firmly fix it on the surface. Repeat this process for all the suction cups.

Caution: Recheck the Pump every 90 minutes. If the red line is visible, Re-pump the cup without losing the remaining vacuum till the Red Line disappears.



- Suction Car Mount is now properly placed on the car.



- Secure the movement of the ball joint with the help of the Ratchet knob of the Telescopic legs.




NOTE: Two Ratchet knobs are provided in Suction Car Mount, with the help of the bottom knob, you can change the ball joint movement of the telescopic legs.




- Place the DJI-QR Plate on the Suction Car Mount.




- Then insert Allen CSK bolts and tighten with the help of 4mm Allen key.

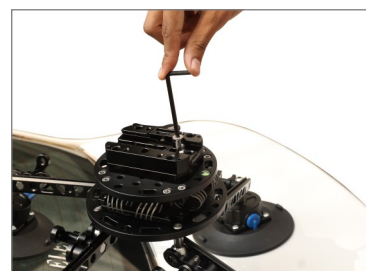


- Follow the same process for other Allen CSK Bolts.

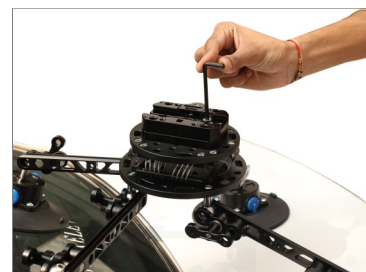

- DJI-QR Plate is properly attached on the Suction Car Mount.

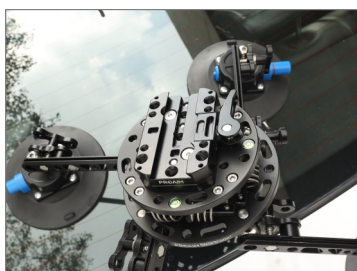

- Then attach the (P-QRG) plate with Ronin Gimble (**Not-Included**) and tighten it properly with the help of a Screw Driver.

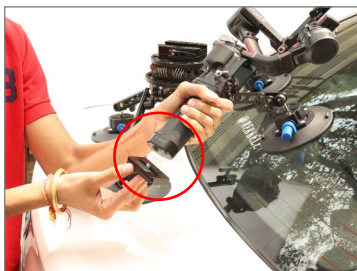

- Then attach the gimbal by sliding it from the DJI-QR plate of the suction car mount.



- Tighten the DJI-QR plate with the help of the provided knob.



- Your Gimbal car suction mount setup is now ready to use.



- Attach the camera (Not-Included) with Ronin Gimbal (Not-Included), as shown in the image.



- Here is the proper assembled image of Ballpro Camera Suction Car Mount.



**YOUR PROAIM BALLPRO CAMERA SUCTION CAR MOUNT W VIBRATION ISOLATOR
ALL DRESSED UP AND READY TO GO!**



(SHOWN WITH OPTIONAL ACCESSORIES)

Warranty: We offer one year warranty for our products from date of purchase. Within this period of time, we will repair it without charge for labor or parts. Warranty doesn't cover transportation costs nor does it cover a product subjected to misuse or accidental damage. Warranty repairs are subjected to inspection and evaluation by us.

Liability: We are not liable for damage caused by products that we do not supply or from mishandling in transit, accident, misuse, neglect, lack of care of the product, or service by anyone other than our company.

Contact Us: In case of any kind of dissatisfaction, please Contact us immediately and we promise our utmost support and care until you use our product.