




Security Light Dusk to Dawn

Instruction Manual

SKU:HHSL03A

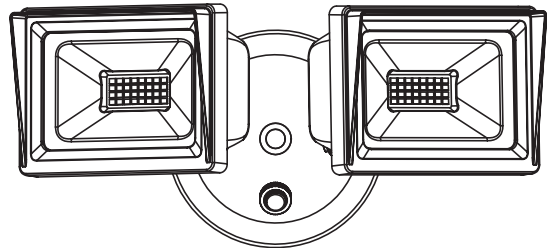

Thank you for your purchase.
Please contact us if you have any questions.
We will get back to you within 24 hours.
Please attach your Order ID so that
we can serve you better.

V210813

READ ALL OF THESE INSTALLATION INSTRUCTIONS BEFORE INSTALLING THE FIXTURE.

WARNING: These products may represent a possible shock or fire hazard if improperly installed or attached in any way. Products should be installed in accordance with these instructions, current electrical codes and/or the current National Electric Code (NEC).

1. This product must be installed by a person familiar with the construction and operation of the product and the hazards involved, and in accordance with current electrical codes and/or the current National Electric Code (NEC).
2. To reduce the possibility of electric shock, fixture must be grounded.
3. Do not attempt to open the LED light engine.
4. Do not look directly into fixture.
5. Not intended for recess mounting in any type of installation.
6. This product is suitable for use in wet locations and designed for surface mounting only.


WARNING: PROPOSITION 65

Handling the coated electrical wires of this product can expose you to chemicals including Lead, which is known to the State of California to cause cancer and/or birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

INSTALLATION:

1. Before installation, please cut off the power.
2. Remove old fixture if necessary for installation.
3. Connect line voltage (hot) AC supply wire(s) (Black) to the line voltage AC wire(s) (Black) inside the canopy via the wire connector.
4. Connect neutral (common) AC supply wire(s) (White) to the neutral AC wire(s) (White) inside the canopy via the wire connector.
5. Connect the grounded AC supply wire(s) [Green or bare wire(s)] to the grounded AC wire(s) [bare copper wire(s)] using the wire connector.

1

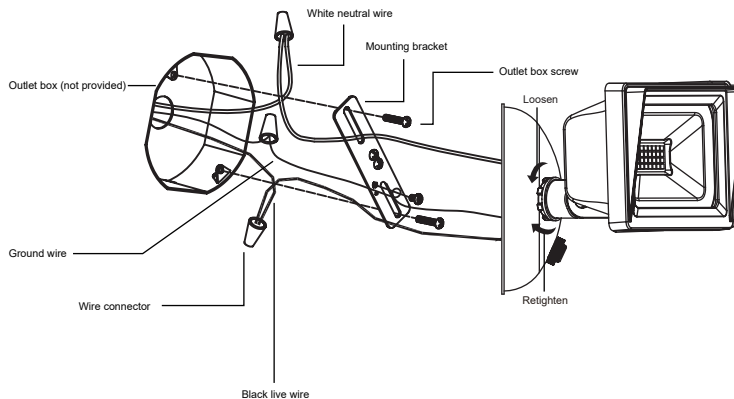

6. Cap and insulate all unused leads.
7. To adjust the light, loosen the side bolt connected to the knuckle arm to adjust the fixture up or down. Retighten bolt to secure the fixture in the desired position.

Tips :

The Light turns on automatically at dusk and off at dawn.
(10-20 Lux: ON; 30-60 Lux: OFF)

Please Note:

- (1)The lights will turn on immediately when being installed first time.
- (2)The sensor detecting time is 10-30S.

Specifications

- Input Voltage: 120VAC 60Hz
- Wattage: 62W
- Lumens: 5400LM
- Color Temperature: 5000K

2

Package Includes

security light x 1
Pack of accessories x 1
Instruction Manual x 1

One Year Limited Warranty

Dewenwils warrants this product to be free from defects in material and workmanship for a period of one year from the date of purchase. Warranty is void if damage is caused by misuse or improper installation.
Our dedicated customer service team will get back to you within 24 hours.



3