

展开尺寸：170x490mm，单页尺寸：170x70mm
材质：200g双铜, 四色印刷, 过哑膜
工艺：风琴折

正

背

POWER ON: • Long Press "M" button 2 seconds turn on/off, blue led flashed when power on, Voice prompts "Power On" and "Red light flashed when power off, Voice prompts "Power Off" • Automatically enter pairing mode after power on (red and blue lights flashed alternately, search HAKKI WIND II for pairing on bluetooth device After connected the blue led lights every 3 seconds, when disconnected it will back to pairing mode, when power off it will automatically connect to the last Bluetooth device, automatically turn off when there is no Bluetooth connection in 5 minutes	SPECIFICATION • Model Bluetooth Version • HAKKI WIND II V5.2+EDR
AUDIO MODE: • One tap to "M" button volume up, prompt sound in maximum volume • Long press "V" button volume down • One tap "M" button to Play/Pause	• Frequency range 200Hz-20KHz • Class2
CALL MODE: • One tap "M" to answer phone call • One tap "V" to Reject phone call • One tap "M" to hang up • Press "V" to answer new phone call and Hangup currently phone call	• Bluetooth Protocol HSP/HFP/2DP/DRP • 10-15M • Play time • Talk time about 5h • Charging volt USB DC5V • Charging time about 1h • Standby time 230h • Battery 150mAh • Weight about 40g
CHARGING MODE: • Charging time about 40 min, battery low alarm with voice prompt "battery low". • The low battery alarm interval 60 seconds, The red light flashes twice. The red led on when charging, the blue led on when fully charged. • Unable to power on while charging.	

- Glasses storage box
- Charging Cable
- Fiber glasses cloth



Find the location of the lenses and nose pad buckles



press one side of the nose pad inward to leave space, so that one side of the nose pad track is separated from the lens, and then the other side can be separated easily




pull the separated lens downwards



Remove the replacement lenses from the lens accessory box



Fit the lens into place through the track and press firmly to return the lens to the nose pad track

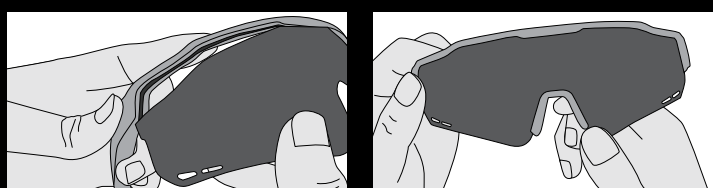

REMOVE THE PROTECTIVE FILM FROM THE LENSES BEFORE USE

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's warranty to operate the equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference.
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy, and if not installed and used in accordance with the instructions, it may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and the receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

操作指南

- 开机后进入配网模式（红蓝灯交替闪烁），打开需连接设备蓝牙，搜索HAKII WIND II 进行配对，配对成功后蓝牙3秒内一次，断开蓝牙连接后重新进入配网模式
开机后自动回连最近连接过的蓝牙设备，5分钟后蓝牙连接自动关机

- 单击V键为音量+, 调节到最大音量时有提示声
- 长按V键音量-
- 播放/暂停单击M键

- 接听电话单击M键
- 拒听电话单击V键
- 挂断电话单击M键
- 挂断当前通话接听新来电单击V键

- 充电时间约40分钟，低电报警语音提示 battery low
- 低电报警间隔60秒，红灯闪2次，充电时红灯亮，充满后蓝灯亮
- 充电过程中不能开机

- 眼镜收纳盒
- Type-C充电线
- 纤维眼镜布



产品参数

- 频率范围:
2402-2480MHZ
- 蓝牙支持协议:
HSP/HFP/A2DP/AVRCP


- 充电电压:
USB DC5V

- 重量:
約40g

Diagram illustrating the components of the UHF-4000 headset:


- 麦克风 (Microphone)
- M
- V
- 麦克风 (Microphone)
- 空气导流孔 (Air flow hole)
- UV4000 激光锁片 (UV4000 Laser lock plate)
- 可调节鼻托 (Adjustable nose pad)
- 音频单元 (Audio unit)
- 防滑套 (Anti-slip sleeve)
- 音频单元 (Audio unit)

镜片替换指南

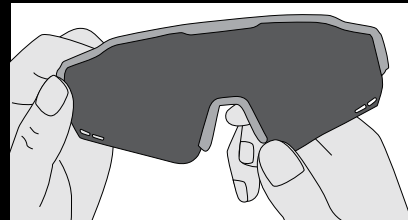


第一步

找到鼻托和镜片卡扣的位置

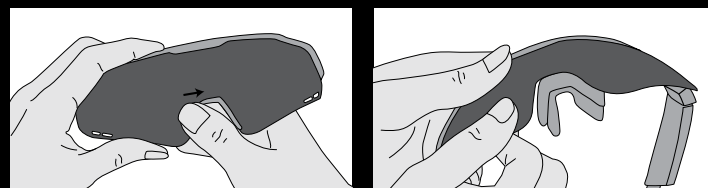


第二步

将鼻托一侧往内侧压留出空间，使一侧鼻托轨道与镜片分离，再将另一侧分离。

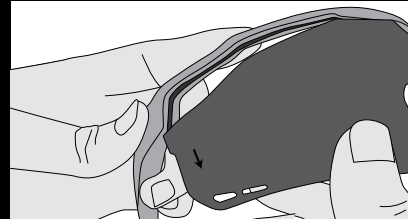


第三步

将分离后的镜片向下拉出

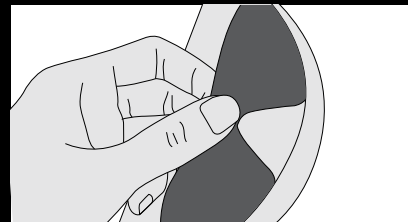

第四步

从镜片配件盒拿出替换镜片

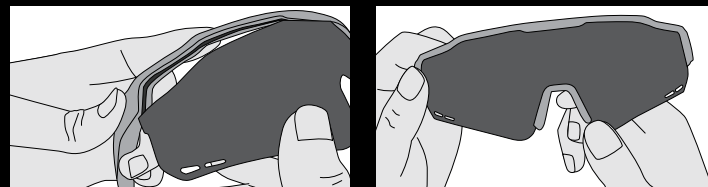

第五步

将镜片通过轨道装到位
使镜片归位鼻托滑轨

使用前要撕下镜片上的保护膜

