


# V20<sup>2X</sup>快速使用说明书

## 开机/关机

双击切换中英文语音播报  
(断开蓝牙)



长按3秒开/关机




开机提示音



LED灯快闪

## 对讲配对



未连接成功，绿灯快闪




未连接蓝牙前



连接成功，绿灯长亮

两台机器开机后，未连接蓝牙前，其中任意一台短按对讲键，进入对讲模式，进行对讲配对即可；配对成功后，对讲键绿灯长亮，当听到“咚”声，进行对讲通话

## 蓝牙连接



蓝牙未连接  
LED灯光快闪



蓝牙模式提示音



蓝牙连接成功  
LED灯慢闪

## 产品概览



重要提醒：

耳机安装前，请按快速手册指引连接手机，试听音效和音量。

如安装到头盔后，音效和音量有较大的差异，请调整喇叭在头盔内的位置。

## 电话功能

双击切换手动/自动接听  
(未连接蓝牙时)



自动(10秒后)



(来电中)

接听



手动接听“短按”



(来电中)

接听



长按2秒



(来电中)

拒绝接听



通话时“短按”



(通话中)

结束通话



双击



未码重播




短按



(去电时)

取消去电


## 充电模式



充电时长亮



(在机器开机情况下，插入充电器充电，机器会自动关机)



充满灯灭

## 音乐功能



短按



(音乐暂停时)




播放



(音乐播放时)



暂停



音量-键



(音乐播放时)




短按上一曲



(音乐播放时)



长按音量减小



音量+键



(音乐播放时)



短按下一曲




(音乐播放时)



长按音量加大


## 对讲重置




同时按下5秒  
音量-键 音量+键

一：蓝牙对讲连接操作简介 (对讲连接成功后，蓝牙的音乐声音是关闭状态，电话来时会自动切换到通话模式，关闭恢复对讲)：  
1. 两台机器首次连接对讲：机器开机后，在没连接蓝牙的情况下，其中一台机器短按对讲键进入对讲模式，并伴有提示音“对讲配对”，开始对讲配对，配对成功后会有提示音提示配对成功“对讲连接”，当听到“咚”的一声后，开始对讲通话，此时对讲指示灯长亮  
2. 开机后，当蓝牙已连接手机时，此时要连接对讲，先断开蓝牙连接，才能短按对讲键进入对讲模式，对讲连接成功后，使用手机搜索蓝牙连接。  
二：对讲回连  
两台已连接过的机器，开机后，两台机器自动对讲回连，或使其中一台机器进入对讲模式也会自动回连，回连后对讲指示灯长亮。  
电话接听：两台机器对讲连接成功，蓝牙也连接手机，当有电话进来，自动切换到电话接听；挂断后，对讲恢复。  
三：清除对讲配对，恢复出厂设置  
开机在没连接蓝牙和对讲的情况下，同时长按音量加减键5S，当听到“咚”声松手，即恢复出厂设置，清除所有配对信息。  
四：使用机器连接第三方头盔蓝牙耳机进行对讲通话  
开机后，两台机器都不连接手机蓝牙，对讲机器开机后进入对讲模式，蓝牙耳机开机进入蓝牙模式，两台开始连接，连接成功后，会有提示音对讲连接，听到“咚”声后，即开始对讲

## 语音助手



(蓝牙已连接状态下) 语音助手键



(长按可关闭或开启灯光，带灯光关机记忆)




唤醒语音助手

## 物品清单




Y20<sup>2X</sup>主机\*1

喇叭麦克风\*1




Type-C充电线\*1

夹式底座\*1



使用说明书\*1



## 注意事项

- 请勿将产品投入火中，避免发生爆炸；
- 请勿拆卸产品，避免电子产品器件损坏；
- 请勿靠近尖锐器，物对产品造成损坏；
- 长时间不用，请放置干燥处。


## Product overview



**Important Notice:**  
Before installing the headphones, follow the Quick Manual instructions to connect your phone and listen to the sound and volume. If there is a large difference in sound effect and volume after installing it on the helmet, please adjust the position of the speaker in the helmet.

## Power on/off

Double-click to toggle the Chinese and English voice broadcast (Disconnect Bluetooth)




Press and hold for 3 seconds to turn on/off the computer

Power-on tone



LED flash

## Intercom pairing

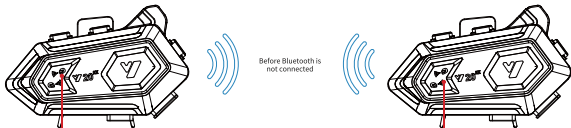

Failed to connect green light flash


After the two machines boot, before not connecting Bluetooth, any one of the short press the intercom key, enter the intercom mode, intercom matching can be done; after matching successfully, the intercom key green light, when you hear the "Knock" sound, get on the intercom

## Bluetooth connection



Bluetooth waits for paired LED lights to flash


Bluetooth mode tone



Bluetooth paired LED lights flash slowly

## Phone features

Double-click to toggle manual auto answering (When Bluetooth is not connected)



automatic (After 10 seconds)



(Incoming call)

Answer



(Incoming call)

Manually answer "short press"



(Incoming call)

Answer



(Incoming call)

Press and hold for 2 seconds

Refusal to answer



(On a call)

"Short press" while on a call



(On a call)

End the c



(Incoming call)

Double-click

Last-code replay



(When the call goes on)


Short press



(When the call goes on)

Cancel outg


## Charging mode



Red light when charging



When the machine is on, plug in the Charger and the machine will shut down automatically



Full lights out

## Music features




(music stops)

Short Press



(music playing)



(music playing)

Volume Plus Key



Play



(music playing)



Pause



Short Press on a tune



(music playing)



Press long to reduce the volume



Short press a tune




(music playing)



Turn up the volume on the long press

## voice assistant



Voice Assistant Key




Short Press (Long press can turn off or turn on lights, with lights off memory)



Wake up the voice assistant

## Intercom reset

Press for 5 seconds at the same time




Reduce the volume key


Volume Plus Key

**Bluetooth intercom connection Operation Brief Introduction (after successful intercom connection, Bluetooth music sound is turned off, phone will automatically switch to call mode, turn off recovery intercom):**  
1. Two machines connected to the intercom for the first time: after the machine started, without connecting Bluetooth, one of the machines pressed the intercom key to enter the intercom mode, accompanied by the sound of "intercom match", to start intercom match, after the successful pairing will be prompted to prompt the successful pairing "intercom connection", when you hear a "Dong" after the intercom call, this time the intercom indicator lights up  
2. After the boot, when Bluetooth has been connected to the phone, this time to connect to talk, first disconnect Bluetooth connection, can short press the radio key to enter the radio mode, after the successful radio connection, use the phone to search for Bluetooth connection.  
**Intercom Link**, two connected machines, after the boot, two machines automatic intercom link, or make one of the machines into intercom mode will also automatically link back, after the intercom indicator light long. Phone answering: the two machines intercom connected successfully, Bluetooth is also connected to the mobile phone, when a call comes in, automatically switch to the phone to answer, hang up, intercom recovery.  
**Clear the pair of intercom**, resume factory settings, boot in the absence of Bluetooth and intercom, at the same time according to the volume of the Button 5s, when you hear the "Knock" sound let go, that is, resume factory settings, clears all pairing information, use the machine to connect with a third-party headset bluetooth headset to make intercom calls. After the machine is turned on, neither machine is connected to the mobile phone Bluetooth. After the intercom machine is turned on, it enters intercom mode. When the Bluetooth headset is turned on, it enters Bluetooth mode, two start to connect, connect successfully, there will be a prompt intercom connection, hear the "Dong" sound, that is, the beginning of intercom


## List of items




Y20\*Host\*1




Speaker microphone\*1




Clip-on base\*1



Velcro installation package\*1



Type-C charging cable\*1



Instruction manual\*1

## Notes

1. Do not put the product into the open flame to avoid explosion;
2. Do not disassemble the product. Avoid damage to product electronics;
3. Do not approach the sharp object, the object will cause damage to the product;
4. Do not use for a long time, please place in a dry place.

## instruction warning

**NOTE:** This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures.  
-Reorient or relocate the receiving antenna  
-Increase the separation between the equipment and receiver.  
-Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.  
-Consult the dealer or an experienced radio/TV technician for help

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions.  
(1) this device may not cause harmful interference, and  
(2) this device must accept any interference received, including interference that may cause undesired operation.