




Smart LED Lighting

# RGBW LED Sports Lighter

## Architectural Flood and Spot Luminaires

### Features & Benefits:

- Directive 15° ~ 60° Beam Angle
- 10-Years / 80,000 Hours Warranty
- Input Voltage Range 208Vac ~ 480Vac
- IP66 Suitable for Damp & Wet Locations
- Built-in 20KV/10KA Surge Protection (SPD)
- DMX512 Dimming and RGBW Color Controls
- 4-Channels (RGBW) Remote Driver Operation
- Flicker Free <2%, Low THD <20%, High PF >0.95

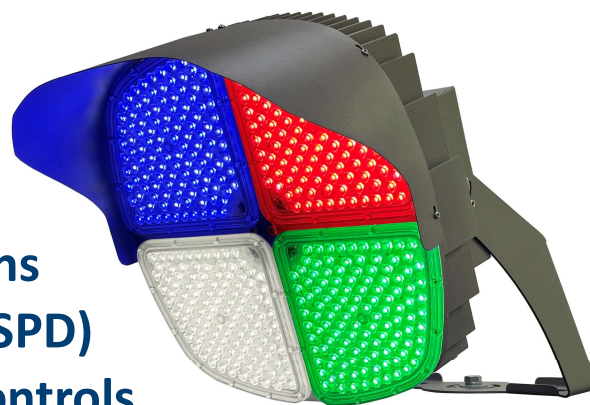

Model	Product	Size	Power	Flux	HID Equal
SFL-300WD-55K-xF-480V RGBW DMX512	RGBW LED Stadium Flood Light DMX512 Control 500W WHT 55K 15° 480V	Ø18 1/8" (H) 20"	300W	45,000 Lumens White	1,000W
<ul style="list-style-type: none"> <li>• "480V" for Input Voltage 208-480Vac ~50/60Hz • P.F. &gt; 0.95 • THD &lt; 20% •</li> <li>• Colors Wavelength: RED: 620 to 630nm; GREEN: 520 to 530nm; BLUE: 465 to 475nm •</li> <li>• White Color Temp. "55K": CCT 5500K ±5% • ~150 Lm/W • CRI &gt; 80 • Cable &amp; J-Box Connection •</li> <li>• (★) Rated Life 80,000 Hrs. (L<sub>70</sub> B<sub>50</sub>) at T<sub>A</sub> 25°C Max. • (#) IP66 ≈ Equal to NEMA Enclosure Rating 4 •</li> <li>• "xF" = Beam Angle: "SF" Sharp Flood 15°, "NF" Narrow Flood 40°, "MF" Medium Flood 60° •</li> <li>• EPA 2.5 • Flicker Free "Low Optical Flicker" Less than 2% • Low Glare &lt;40 •</li> <li>• (@) Supports DMX/RDM Protocols. Available as Internal or Remote Driver •</li> </ul>					




Smart LED Lighting



# **RGBW LED Sports Lighter**

## **Architectural Flood and Spot Luminaires**

### **INSTALLATION & WIRING DIAGRAM**

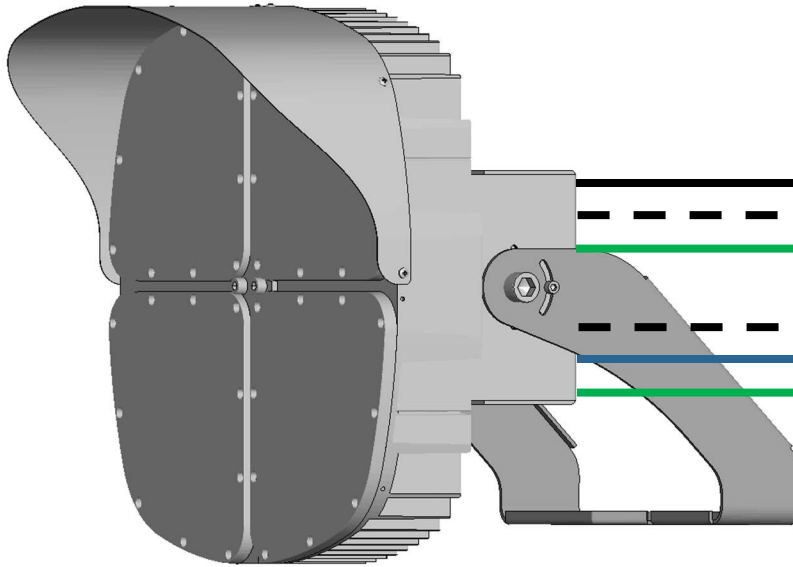

#### **POWER**

Black Wire: Phase (~) or Hot 1  
White Wire: Neutral (0) or Hot 2  
Yellow/Green Wire: Ground

#### **CONTROL**

BLK/WHT Wire: Vaux+  
PURPLE Wire: DIM+ | DMX+  
PINK Wire: DIM- | DMX-

#### **Wireless Control:**

- 1) Connect BLK/WHT Wire to Wireless Control Module POWER IN
- 2) Connect PURPLE Wire to Wireless Control Module DMX+ or DALI+
- 3) Connect PINK Wire to Wireless Control Module DMX- or DALI-/COMM

#### **Instructions – follow below steps:**

- 1) Turn Power OFF
- 2) Connect Mains Wires Phase/Neut./Ground
- 3) Connect Dimmer Wires: PURPLE (DIM+) & PINK (DIM-) ;  
DMX512 Wires: BLK/WHT (Vaux+), PURPLE (DMX+), PINK (DMX-)
- 4) Do Not Exceed Fixture's Max Rated Voltage  
480Vac between Phase to Neutral or Hot 1 & Hot 2
- 5) Turn Power ON & use Dimmer/DMX to control Light Level & Colors


**WARNING – Turn Power Off during Wiring of LED Fixtures !**




Smart LED Lighting

# RGBW LED Sports Lighter


## Architectural Flood and Spot Luminaires

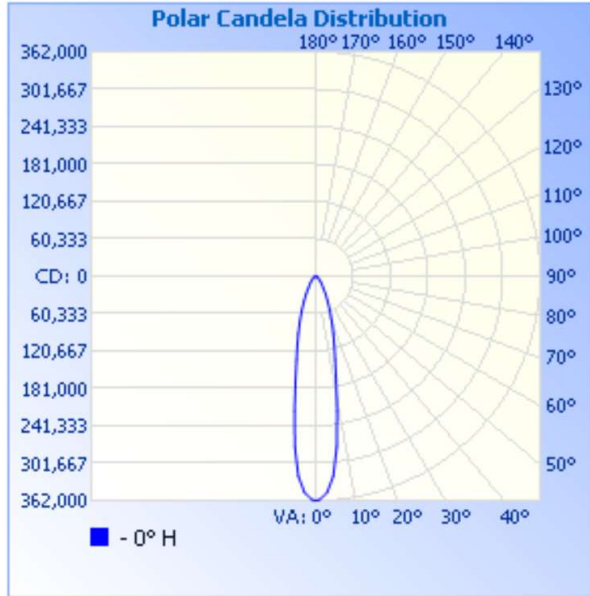



**"SF" Sharp Flood 15°**

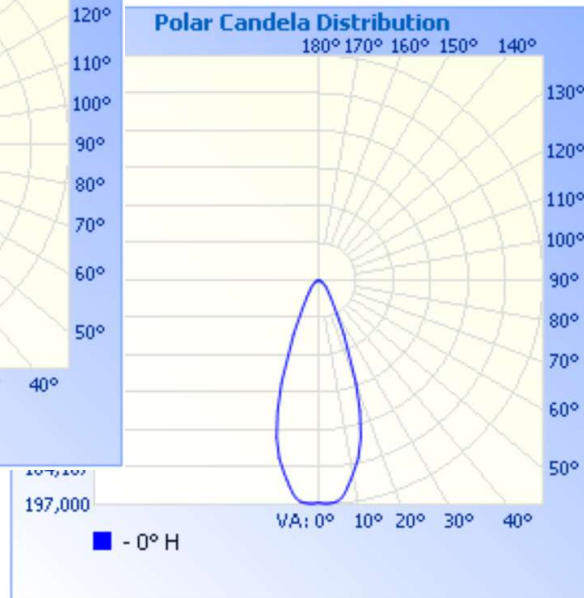

**"Narrow Flood 40°**

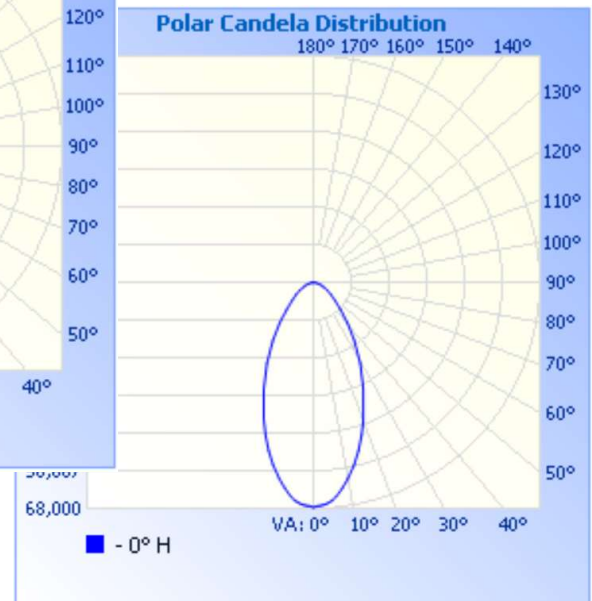

**"MF" Medium Flood 60°**

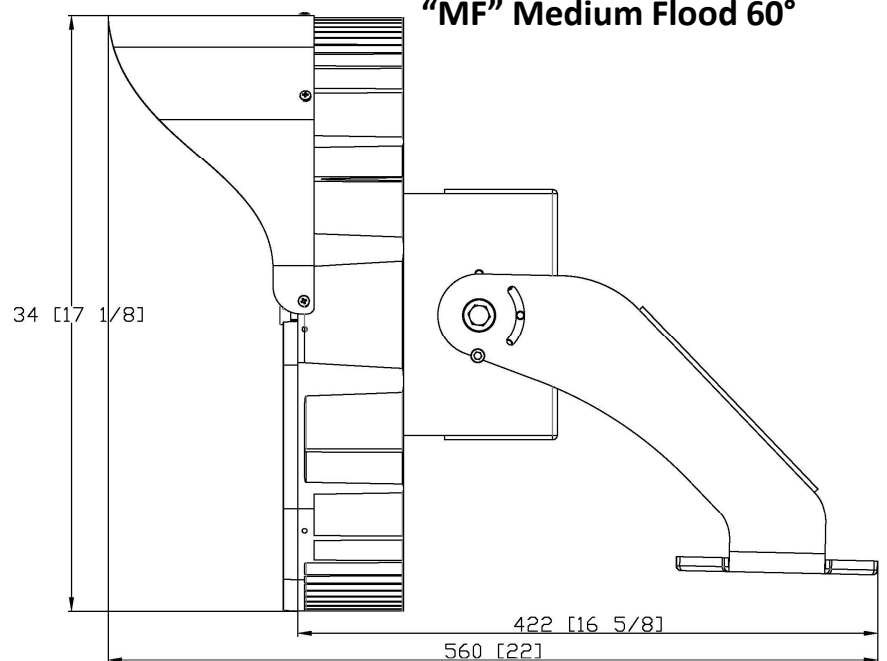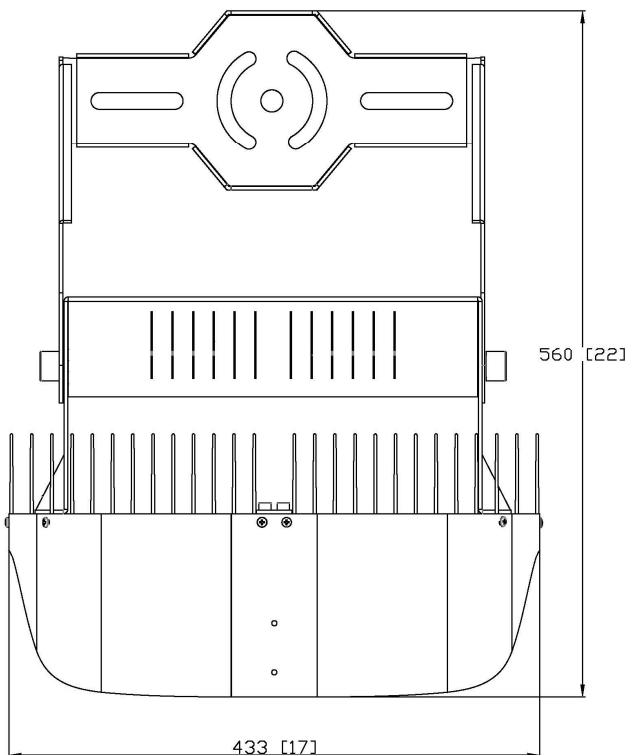





Smart LED Lighting







# **RGBW LED Sports Lighter**

## **Architectural Flood and Spot Luminaires**

### **REMOTE LED DRIVER**

**Drawings & Dimensions (in mm):**

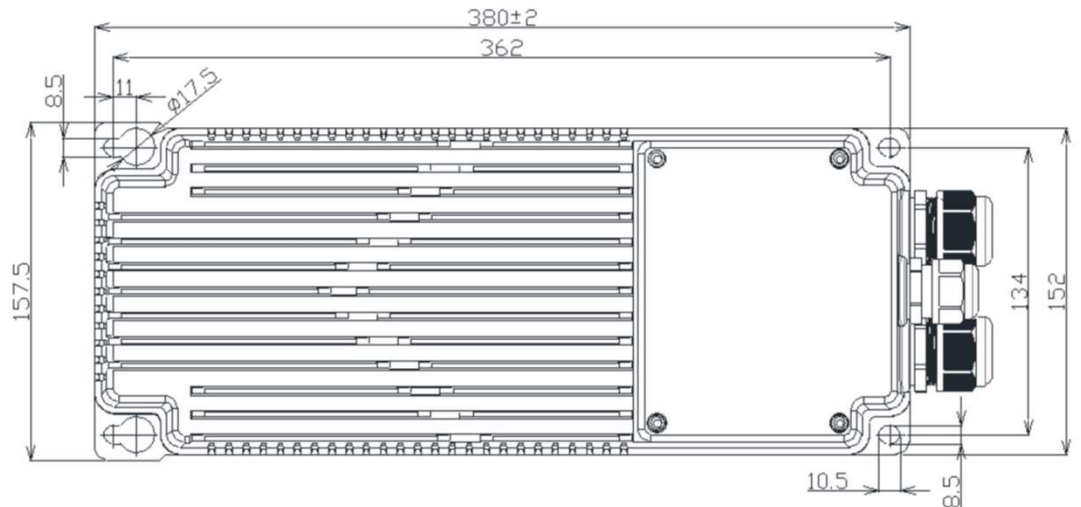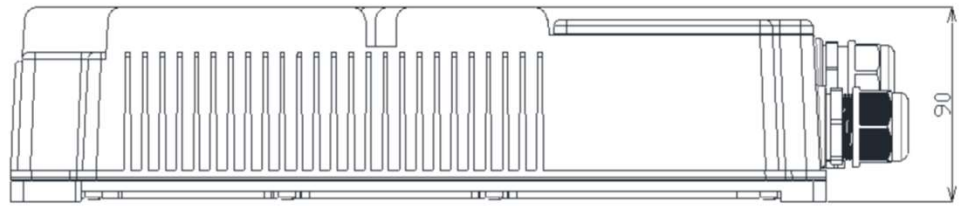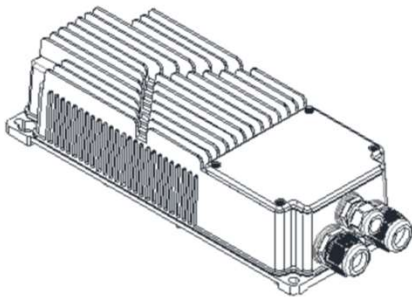

Part	Description
A	Input
B	Output
C	Daisy Chain Dimming
D	Ventilation Valve

**WARNING – Turn Power Off during Wiring of LED Fixtures !**



Smart LED Lighting



# **RGBW LED Sports Lighter**

## **Architectural Flood and Spot Luminaires**

### **DMX Info & Specs**

ITEM	SPECS	NOTES
DMX+ DMX-	-6V Min. +6V Max.	DMX to Ground Resistance 25Mohm
Logic 0/1	0.2V	DMX+ to DMX- Threshold
Baud Rate	250kbps	Communication Baud Rate
Flashing	25fps	On/Off Flashing Rate with DMX
Dimming	5% Min. 100% Max.	Dimming Range
Aux	24Vdc +/- 2.4V 3 Watt Max.	Auxiliary Power Voltage
DMX/RDM		Supports DMX/RDM Protocols
DMX Address	Pre-Set	Factory Pre-Addressed or On-Site Manual Addressable

### **Dimensions & Weight**

	BUILT-IN DRIVER	REMOTE DRIVER	NOTES
Model #	SFL-500W	SFL-500W RD	
Unit Weight	61 Lb. [27.7 Kg.]	45 Lb. [18.6 Kg.]	Unit Only, No Packing
Packaged Unit Weight	66 Lb. [30 Kg.]	46 Lb. [20.9 Kg.]	With Carton
Carton Dims	(L) 29½" x (W) 19¾" x (H) 13" [(L) 75 x (W) 50 x (H) 33 CM]		LED Driver 9.9 Lb./[4.5Kg.]



Smart LED Lighting




# RGBW LED Sports Lighter

## Architectural Flood and Spot Luminaires

### Model Number Nomenclature

**SFL-nnnWD-ccK-yF-xxxV [PC,MS,NC] ABC**

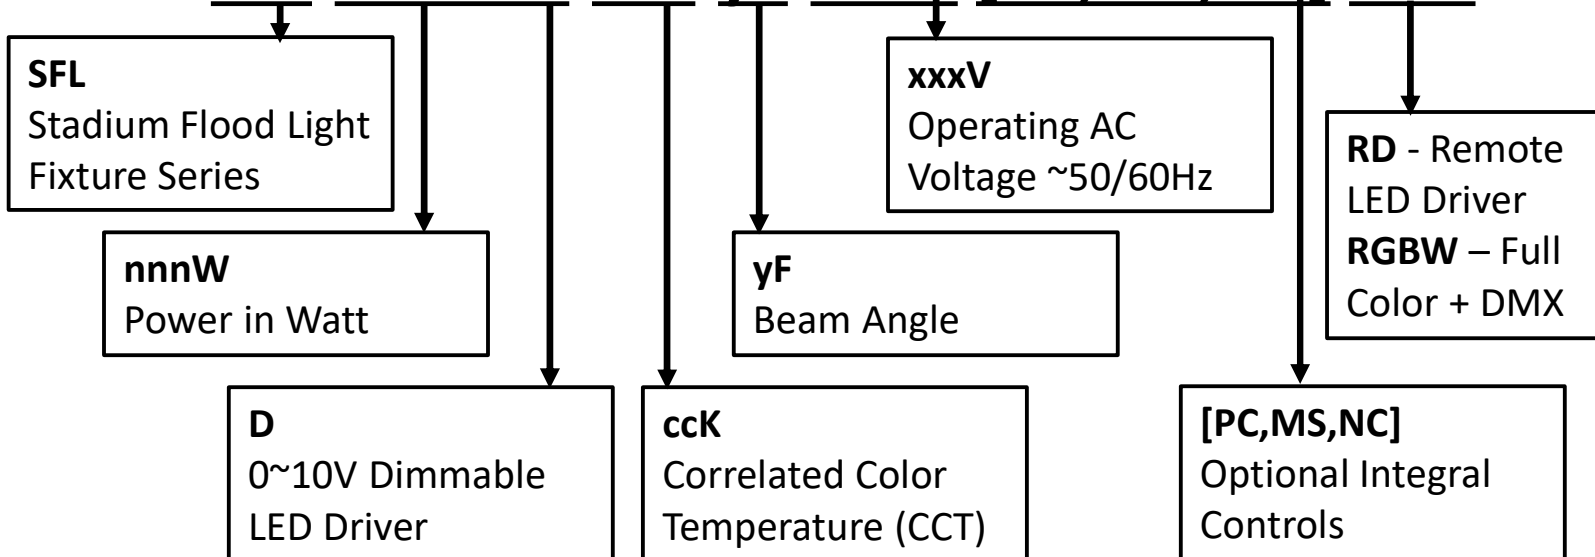

Power ►	300W	400W	500W	600W	800W
(Watt)	SFL-300WD	SFL-400WD	SFL-500WD	SFL-600WD	SFL-800WD
CCT ►	3000K	4000K	5000K	5500K	
±10%	30K	40K	50K	55K	
Beam ► Angle	Sharp Flood 15°	Narrow Flood 40°	Medium Flood 60°	ABC=RD	
(Degrees)	SF	NF	MF	Remote LED Drive	
Voltage ►	120~277V	208~480V	ABC=RD	ABC=RGBW	
(Vac ~50/60Hz)	277V	480V		Full Color + DMX	

#### Options: Not Standard - On Request Only

Remote LED Driver: "RD" upto 100ft

Integral Controls: "PC"=Photocell, "MS"=Motion Sensor, "NC"=Network Control

CCT: "22K"=2200K, "27K"=2700K, "35K"=3500K

Wattage: 320W, 350W, 480W, 700W

High Power Laser Pointer for Aiming / Targeting